

Honeywell

MAINTENANCE MANUAL

BENDIX/KING[®]

KY 96A, KY 97A

***VHF COMMUNICATION
TRANSCEIVER***

MANUAL NUMBER 006-05674-0005

Revision 5, April 2003

WARNING

THE ENCLOSED TECHNICAL DATA IS ELIGIBLE FOR EXPORT UNDER LICENSE DESIGNATION NLR AND IS TO BE USED SOLELY BY THE INDIVIDUAL/ ORGANIZATION TO WHOM IT IS ADDRESSED. DIVERSION CONTRARY TO U.S. LAW IS PROHIBITED.

COPYRIGHT NOTICE

©1989, 1992, 1994, 1997, 2003 HONEYWELL INTERNATIONAL INC.

REPRODUCTION OF THIS PUBLICATION OR ANY PORTION THEREOF BY ANY MEANS WITHOUT THE EXPRESS WRITTEN PERMISSION OF HONEYWELL IS PROHIBITED. FOR FURTHER INFORMATION CONTACT THE MANAGER, TECHNICAL PUBLICATIONS, HONEYWELL, ONE TECHNOLOGY CENTER, 23500 WEST 105TH STREET OLATHE KS 66061 TELEPHONE: (913) 782-0400.

REVISION HISTORY

MAINTENANCE MANUAL

BENDIX/KING

KY 96A, KY 97A

VHF Communication Transceiver

| PART NUMBER | REV | DATE | DESCRIPTION |
|----------------|-----|----------|---|
| 006-05674-0005 | 5 | Apr/2003 | Incorporated -0020 SW/HW versions. |
| 006-05674-0004 | 4 | Apr/1994 | Incorporated IM Rev 3. |
| 006-05674-0003 | 3 | Jan/1994 | Revised Section VI. Incorporated IM Rev 2. |
| 006-05674-0002 | 2 | Oct/1992 | Revised Section VI. |
| 006-05674-0001 | 1 | Oct/1989 | Incorporated IM Rev 1. |

THIS PAGE RESERVED

**SECTION IV
THEORY OF OPERATION**

| Paragraph | Page |
|---------------------------------------|------|
| 4.1 General | 4-1 |
| 4.2 General Circuit Theory..... | 4-1 |
| 4.3 Detailed Theory of Operation..... | 4-3 |

LIST OF ILLUSTRATIONS

| Figure | Page |
|---------------------------------------|------|
| 4-1 Receiver Block Diagram | 4-13 |
| 4-2 Transmitter Block Diagram | 4-15 |
| 4-3 Microprocessor Block Diagram..... | 4-17 |

**SECTION V
MAINTENANCE**

| Paragraph | Page |
|-------------------------------------|------|
| 5.1 General Information | 5-1 |
| 5.2 Test Equipment..... | 5-1 |
| 5.3 Performance Test Procedure..... | 5-4 |
| 5.4 Alignment Procedure | 5-9 |
| 5.5 Overhaul | 5-11 |

LIST OF TABLES

| Table | Page |
|-----------------------------------|------|
| 5-1 Required Test Equipment..... | 5-1 |
| 5-2 Optional Test Equipment | 5-2 |

LIST OF ILLUSTRATIONS

| Figure | Page |
|---------------------------------------|------|
| 5-1 Typical Test Equipment Setup..... | 5-3 |
| 5-2 Linear Detector | 5-13 |
| 5-3 MIC Test Circuit..... | 5-13 |
| 5-4 40 dB Attenuator..... | 5-14 |
| 5-5 Bench Test Harness | 5-15 |

SECTION VI ILLUSTRATED PARTS LIST

| Paragraph | Page |
|--|-------|
| 6.1 Introduction | 6-1 |
| 6.2 Bill of Material Description | 6-1 |
| 6.3 Software Documentation | 6-9 |
| 6.4 Illustrated Parts List | 6-17 |
| 6.4.1 KY 96A VHF Communication Transceiver | 6-17 |
| 6.4.2 KY 97A VHF Communication Transceiver | 6-41 |
| 6.4.3 KY 96A, KY 97A Unit Software Set | 6-53 |
| 6.4.4 LCD Processor Board | 6-57 |
| 6.4.5 KY 97A (14V) Modulator Assembly | 6-71 |
| 6.4.6 KY 96A (28V) Modulator Assembly | 6-79 |
| 6.4.7 LCD Display Board | 6-87 |
| 6.4.8 Transmitter Board | 6-105 |
| 6.4.9 Audio Amplifier Board | 6-135 |
| 6.4.10 Main Board | 6-149 |

LIST OF TABLES

| Table | Page |
|--|------|
| 6-1 Reference Designator Abbreviations | 6-1 |
| 6-2 Description Abbreviations | 6-3 |
| 6-3 Unit of Measure Abbreviations | 6-9 |

LIST OF ILLUSTRATIONS

| Figure | Page |
|---|------|
| 6-0 Sample Parts List | 6-13 |
| 6-1 KY 96A Final Assembly (Dwg 300-04268-0000) | 6-25 |
| 6-1A KY 96A Final Assembly (Dwg 300-04268-0000) | 6-29 |
| 6-1B KY 96A Final Assembly (Dwg 300-04268-0000) | 6-33 |
| 6-1C KY 96A Final Assembly (Dwg 300-04268-0000) | 6-37 |
| 6-2 KY 97A Final Assembly (Dwg 300-04268-0001) | 6-49 |
| 6-3 LCD Processor Board Assembly (Dwg 300-07475-0000) | 6-61 |
| 6-3A LCD Processor Board Assembly (Dwg 300-07475-0000) | 6-63 |
| 6-4 LCD Processor Board Schematic (Dwg 002-07475-0000) | 6-65 |
| 6-4A LCD Processor Board Schematic (Dwg 002-07475-0000) | 6-67 |
| 6-4B LCD Processor Board Schematic (Dwg 002-07475-0000) | 6-69 |
| 6-5 KY 97A (14V) Modulator Assembly (Dwg 300-04270-0000) | 6-75 |
| 6-5A KY 97A (14V) Modulator Assembly (Dwg 300-04270-0000) | 6-77 |
| 6-6 KY 96A (28V) Modulator Assembly (Dwg 300-04271-0000) | 6-83 |

| | | | |
|-------|---|----------------------------|-------|
| 6-6A | KY 96A (28V) Modulator Assembly | (Dwg 300-04271-0000) | 6-85 |
| 6-7 | LCD Display Board Assembly..... | (Dwg 300-07479-0000) | 6-91 |
| 6-7A | LCD Display Board Assembly..... | (Dwg 300-07479-0000) | 6-93 |
| 6-7B | LCD Display Board Assembly..... | (Dwg 300-07479-0000) | 6-95 |
| 6-7C | LCD Display Board Assembly..... | (Dwg 300-07479-0000) | 6-97 |
| 6-8 | LCD Display Board Schematic | (Dwg 002-07479-0000) | 6-99 |
| 6-8A | LCD Display Board Schematic | (Dwg 002-07479-0000) | 6-101 |
| 6-8B | LCD Display Board Schematic | (Dwg 002-07479-0000) | 6-103 |
| 6-9 | KY 97A (14V) Transmitter Assembly | (Dwg 300-07540-0000) | 6-109 |
| 6-9A | KY 97A (14V) Transmitter Assembly | (Dwg 300-07540-0000) | 6-111 |
| 6-9B | KY 97A (14V) Transmitter Assembly | (Dwg 300-07540-0000) | 6-113 |
| 6-10 | KY 97A (14V) Transmitter Schematic..... | (Dwg 002-07540-0000) | 6-115 |
| 6-10A | KY 97A (14V) Transmitter Schematic..... | (Dwg 002-07540-0000) | 6-117 |
| 6-10B | KY 97A (14V) Transmitter Schematic..... | (Dwg 002-07540-0000) | 6-119 |
| 6-11 | KY 96A (28V) Transmitter Assembly | (Dwg 300-07540-0001) | 6-121 |
| 6-11A | KY 96A (28V) Transmitter Assembly | (Dwg 300-07540-0001) | 6-123 |
| 6-11B | KY 96A (28V) Transmitter Assembly | (Dwg 300-07540-0001) | 6-125 |
| 6-12 | KY 96A (28V) Transmitter Schematic..... | (Dwg 002-07540-0001) | 6-127 |
| 6-12A | KY 96A (28V) Transmitter Schematic..... | (Dwg 002-07540-0001) | 6-129 |
| 6-12B | KY 96A (28V) Transmitter Schematic..... | (Dwg 002-07540-0001) | 6-131 |
| 6-12C | KY 96A (28V) Transmitter Schematic..... | (Dwg 002-07540-0001) | 6-133 |
| 6-13 | Audio Amplifier Board Assembly | (Dwg 300-07797-0000) | 6-139 |
| 6-13A | Audio Amplifier Board Assembly | (Dwg 300-07797-0000) | 6-141 |
| 6-14 | Audio Amplifier Board Schematic | (Dwg 002-07797-0000) | 6-143 |
| 6-14A | Audio Amplifier Board Schematic | (Dwg 002-07797-0000) | 6-145 |
| 6-14B | Audio Amplifier Board Schematic | (Dwg 002-07797-0000) | 6-147 |
| 6-15 | KY 97A (14V) Main Board Assembly..... | (Dwg 300-07799-0000) | 6-199 |
| 6-15A | KY 97A (14V) Main Board Assembly..... | (Dwg 300-07799-0000) | 6-203 |
| 6-15B | KY 97A (14V) Main Board Assembly..... | (Dwg 300-07799-0000) | 6-207 |
| 6-15C | KY 97A (14V) Main Board Assembly..... | (Dwg 300-07799-0000) | 6-211 |
| 6-16 | KY 96A (28V) Main Board Assembly..... | (Dwg 300-07799-0001) | 6-215 |
| 6-16A | KY 96A (28V) Main Board Assembly..... | (Dwg 300-07799-0001) | 6-219 |
| 6-16B | KY 96A (28V) Main Board Assembly..... | (Dwg 300-07799-0001) | 6-223 |
| 6-16C | KY 96A (28V) Main Board Assembly..... | (Dwg 300-07799-0001) | 6-227 |
| 6-17 | KY 96A, KY 97A Main Board Schem..... | (Dwg 002-07799-0000) | 6-231 |
| 6-17A | KY 96A, KY 97A Main Board Schem..... | (Dwg 002-07799-0000) | 6-249 |
| 6-17B | KY 96A, KY 97A Main Board Schem..... | (Dwg 002-07799-0000) | 6-261 |

**APPENDIX S
SOFTWARE/ HARDWARE CONFIGURATION**

LIST OF ILLUSTRATIONS

| Figure | | Page |
|--------|---|------|
| S-1 | KY 96A Software/ Hardware Configuration | S-3 |
| S-2 | KY 97A Software/ Hardware Configuration | S-9 |

SECTION IV THEORY OF OPERATION

4.1 GENERAL

The KY 96A, KY 97A Comm Transceiver is comprised of:

- A. A single conversion VHF receiver utilizing a four pole varactor tuned preselector, field effect transistors for the RF amplifier and mixer, an 8 pole monolithic crystal IF filter and integrated circuit IF amplifier.
- B. A broadband transmitter with power transistors mounted on a die-cast aluminum heat sink followed by a three section elliptic function low pass filter.
- C. A control section utilizing a microprocessor to:
 - 1. Increment or decrement the selected frequency.
 - 2. Store the "USE," "STBY," and 9 user programmable channels in non-volatile memory.
 - 3. Remote transfer the "USE" and "STBY" frequencies and remote increment the stored channels.
 - 4. Light the display with a digital liquid crystal readout and control dimming of the display.
 - 5. Generate frequency code for the synthesizer.
- D. A power supply made up of a discrete 9 volt regulator, 3 terminal 5 volt regulator.
- E. A liquid crystal frequency display with variable backlighting and viewing angle.

4.2 GENERAL CIRCUIT THEORY

4.2.1 Receiver

A receiver block diagram is shown in [Figure 4-1](#). The received signal passes through the low pass filter on the transmitter PC board and the T/R diode to the dual gate field effect transistor RF amplifier. The desired signal proceeds to the dual gate FET mixer Q103 where it is converted to 11.4 MHz, and fed through the monolithic crystal filter to the integrated circuit IF amplifiers followed by the detector. Automatic gain control voltage is fed back to the first and second IF amplifiers and the RF amplifier to achieve more than 120 dB of dynamic range. The detected signal is not allowed to pass through the squelch gate until the input signal has:

- A. Exceeded the noise squelch setting or,
- B. Exceeded the carrier level setting.

It proceeds through the low pass filter which attenuates all audio frequencies above 2.5 kHz. The audio signal is fed through the volume control to the integrated circuit audio pre-amplifier. Its output will provide more than 100 milliwatts to a headphone, or to an external audio mixer/amplifier.

An optional 4 ohm audio amplifier provides 4 watts on the 13.75 V units and 8 watts on the 27.5 V units.

4.2.2 Transmitter/ Modulator

The transmitter block diagram is shown in [Figure 4-2](#). In the transmit mode, the VCO feeds a signal to the transmitter of the frequency selected in the “USE” display window on the front panel. The signal is amplified by the broadband transmitter to the 5 watts level and fed through the elliptic function 3 section low pass filter to the antenna.

Modulation is applied to the power amplifier by series modulating the 27.5 volt line (13.75 for KY 97A) with mic audio. A small amount of mic audio is also fed to the receiver audio amplifier for sidetone.

4.2.3 Stabilized Master Oscillator

The stabilized master oscillator (SMO) I103 generates the RF drive for the transmitter as well as the local oscillator for the receiver. The SMO synthesizes frequencies that are referenced to a 25 kHz signal derived from a 3.975 MHz crystal oscillator. Receive and transmit codes are fed to the synthesizer by the microprocessor (uP) and represent the frequency indicated in the “USE” window on the front panel.

4.2.4 Microprocessor and Display

Refer to microprocessor block diagram shown in [Figure 4-3](#). The microprocessor (uP) contains 4 k bytes of permanent Read Only Memory (ROM) for program instruction. A 32 byte non-volatile memory is used externally for frequency information storage. The uP receives a 3.975 MHz clock signal from the synthesizer PLL IC which is derived from a 3.975 MHz crystal.

The uP sends a serial 24 bit code to the synthesizer PLL IC (last 20 bits used) to determine the reference divide ratio. A serial 24 bit code (last 20 bits used) is also sent to determine the divide ration of the “USE” frequency (when changed).

The increment/decrement switches send three pulses to the uP (up, pulse, down) in a specific sequence to provide the code and validity check for increment and decrement operations.

Display dimming controls are read through an analog to digital converter allowing the aircraft lighting bus to dim the display.

The LCD display viewing angle is controlled by I801, which controls the display bias, thereby controlling the display viewing angle based on inputs from R755, R802, and Q803.

4.3 DETAILED THEORY OF OPERATION

Refer to schematics in [Section VI](#) of this manual.

4.3.1 Receiver

4.3.1.1 Antenna Input Circuit

In the receive mode Q101 is switched on, forward biasing the T/R diodes located on the transmitter board. The desired signal passes through the first pole of the low pass filter, then to the T/R diodes, and then to the receiver board. C102 steps up the impedance to match the first pole of the preselector.

4.3.1.2 Double Tuned Preselector

The first pole of the preselector is tuned by L101, C103 and CR101A. The signal is coupled to the second pole of the preselector by L102. The second pole of the preselector is tuned by L103, C106 and CR101B. The matched varactor diodes, CR101A and CR101B, are tuned to the desired frequency through a large resistor from the VCO control voltage. The desired signal is coupled to gate 1 of the RF amplifier by C107.

4.3.1.3 RF Amplifier Q102

Q102 and the associated parts make up the RF amplifier. The desired signal is applied to gate 1. The RF AGC is applied to gate 2. The RF amplifier has 20 dB of gain at maximum RF AGC voltage, and 30 dB of attenuation with minimum RF AGC voltage; producing a dynamic range of 50 dB. C114 couples the desired signal to the double tuned interstage.

4.3.1.4 Double Tuned Interstage Network

The first pole of the interstage network is tuned by L105, C115 and CR101C. The signal is coupled to the second pole of the interstage network by L106. The second pole of the preselector is tuned by L107, C118 and CR101D. The matched varactor diodes, CR101C and CR101D, are tuned to the desired frequency through a large resistor from the VCO control voltage. The desired signal is coupled to gate 1 of the mixer through L133.

4.3.1.5 Mixer Q103

Q103 and the associated parts make up the mixer. The local oscillator signal is fed to gate 2 at a frequency 11.4 MHz above the desired signal. The level of the local oscillator is between +4 dBm and +7 dBm. The desired signal is now at 11.4 MHz. The drain of Q103 is tuned to 11.4 MHz by T101 and matched to the crystal filter.

4.3.1.6 Crystal Filter FL101

The crystal filter provides the desired selectivity. The input and output of the filter is matched to 4100 ohms by T101 and T102 respectively.

4.3.1.7 First IF Amplifier I101

The desired signal is coupled from T102 to the first IF amplifier, I101. The first IF amplifier has about 45 dB of gain with 60 dB of dynamic range. IF AGC voltage is applied to I101 on pin 5 through R124. R124 converts the AGC voltage to an AGC current. The output is loaded with R245 for stability. T103 is tuned for 11.4 MHz and couples the signal to the second IF amplifier.

4.3.1.8 Second IF Amplifier I102

The second IF amplifier has about 45 dB of gain with 60 dB of dynamic range. IF AGC voltage is applied to I102 on pin 5 through R126. R126 converts the AGC voltage to an AGC current. The output is loaded with R246 for stability. T104 is tuned for 11.4 MHz and couples the signal to the detector.

4.3.1.9 Detector

Transistor Q105 and capacitor C130 makes up the amplitude modulation detector. It is biased near cutoff by transistor Q104, which the emitter-base junction provides bias stability and temperature compensation. The demodulated signal is sent to the noise amp, Q112, IF AGC, I105A, squelch gate, Q116, and to the demodulator buffer, Q131.

4.3.1.10 IF AGC Circuit

AGC voltage is derived from the average value of the detector collector voltage, which is inversely proportional to the carrier level. The operational amplifier I105A filters out the audio variations and integrates to the average voltage of the detector. R159 and R160 set the maximum gain reduction at about 6.6 volts. As the detector collector voltage increases with a decrease in signal level, the AGC voltage decreases which increases the gain in the first and second IF amplifiers. The IF AGC voltage is made available at TP105 and at the rear connector pin L. The AGC voltage at pin L is reduced by one diode drop (approx. 0.6 V).

4.3.1.11 RF AGC Circuit

The RF AGC voltage is applied to the RF amplifier from I105B. The RF AGC stays at maximum voltage (maximum gain of amp) until the RF signal level reaches about 12.5 μ V. The level at which it attacks is set by R184. When the IF AGC voltage exceeds the reference voltage set by R184, the RF AGC voltage decreases, decreasing the gain in the RF amplifier. RF AGC is made available at TP106.

The RF AGC is gated with TX(not) through CR120A such that when the unit transmits, the RF AGC voltage goes to zero. This provides maximum attenuation in the RF amplifier during transmit.

4.3.1.12 Noise and Carrier Squelch Circuit

The carrier squelch circuit prevents the radio from squelching if an RF carrier greater than 12.5 μ V has been detected. I106B compares the RF AGC voltage, which is inversely proportional to the carrier level, to the reference level set by R183 and R185. If the RF AGC voltage is greater than the reference level, then the unit is allowed to squelch; if the noise level is large enough. When the RF AGC voltage is less than the reference level, the output of I106B goes high; turning on Q140. When Q140 turns on,

the input signal to the noise amp is shorted to ground, causing the noise squelch circuit to be inhibited.

Transistor Q112 amplifies the noise from the collector of the detector and limits its amplitude so that impulse spikes (such as ignition noise) will not be of a higher amplitude than other noise. The output of Q112 is coupled to a 8 to 10 kHz bandpass filter, I106A. The output of the bandpass filter is fed to the comparator, I107A. The signal is compared to the reference level set by R176. When the noise signal is larger than the reference level the comparator goes high charging C166. If C166 is charged greater than half the supply voltage, then the unit will be squelched.

CR107A and CR110B will squelch the radio in transmit.

4.3.1.13 Squelch Gate

Q116, Q117 and associated parts make up the squelch gate. The audio signal comes from the detector at TP108; the detector biases Q116. When the unit is squelched the base of Q117 goes to the supply voltage and its emitter follows. Since the emitters of Q116 and Q117 are tied together, Q116 becomes reverse biased; attenuating the signal 70 dB.

4.3.1.14 Audio Low Pass Filter

Inductor L110 and its associated capacitors form a low pass elliptical filter. The filter is at least 20 dB down at 4 kHz and the notch is at least 25 dB down at 4.5 kHz. The filter does roll off below 350 Hz since the signal is AC coupled in and out of the filter. The low frequency roll off reduces 60 cycle hum.

4.3.1.15 Audio Compressor

The received signal is coupled through C178 to the input of the compressor amplifier, I111A. The output is fed to the volume control and to I111B. I111B will begin to discharge C179 when the amplitude to I111B exceeds the voltage across R210. Discharging C179 lowers the gate to source voltage on Q118, which reduces the drain to source resistance on Q118. As Q118 is turned on, the amplitude at C178 is reduced. This maintains a constant amplitude out of the compressor amplifier.

4.3.1.16 Audio Amplifier

The audio signal is routed through the volume control R902 to the audio amplifier, I112A. The signal is amplified approximately 30 dB and capacitive coupled through C187 to the auto-transformer, T107. The voltage and impedance are stepped up to provide a minimum of 100 mW of audio power into 500 ohm load; such as headphones or an audio panel. The sidetone, through R220, and the Mic intercom, through R218, are also amplified by the audio amplifier.

An optional 4 ohm audio amplifier provides 4 watts on 13.75 V units and 8 watts on 27.5 V units. See audio board section for more details.

4.3.2 Stabilized Master Oscillator (SMO)

4.3.2.1 Synthesizer

The stabilized master oscillator is based around synthesizer I103 which is serial programmable by the microprocessor.

A 3.975 MHz crystal is attached to the gate oscillator, and the reference divider divides it by 159 to produce the 25 kHz reference frequency. The RF frequency is divided by the internal pre-scaler and divider then compared by the phase detector to the reference frequency. If the frequency is greater than 25 kHz the phase detector will pulse up once every 40 usec. If the frequency is less than 25 kHz the phase detector will pulse down. The greater the divided frequency from the reference frequency the wider the phase detector pulse.

Q133, R137, and C135 integrates the lock detect pulses to send the lock detect signal to the microprocessor. The reference oscillator is lightly coupled to Q132 which amplifies the 3.975 MHz signal for the microprocessor and I705 on the processor board. The clock, data and strobe lines are driven from the microprocessor.

4.3.2.2 Voltage Translator

Q134, Q135, Q136, Q137 and their associated parts make up the voltage translator. The voltage translator translates from five volt pulse to nine volt pulse and inverts the logic of the pulses. The output of the phase detector is fed to the emitters of Q134 and Q135. The bases of Q134 and Q135 are biased to about 2 volts so that when the phase detector is tri-stated, Q134 and Q135 will be off. If the phase detector pulses low, Q134 will turn on causing Q136 to turn on and a 9 volt pulse to appear at the output of the voltage translator, TP110. If the phase detector pulses high, Q135 will turn on causing Q137 to turn on pulling the output to ground.

4.3.2.3 Low Pass Filter

The low pass filter is a lead/ lag network with a 2.5 kHz elliptical low pass filter with its notch at 25 kHz. C235 and C236 make up the elliptical filter. R279, R280, R281, and C237 make up the lead/ lag network. With this filter, the loop bandwidth is about 300 Hz and the 25 kHz notch is about 130 dB down. The control voltage is fed to the pre-selector through R136 and to the VCO through L132.

4.3.2.4 Voltage Controlled Oscillator (VCO)

Q108 and its associate parts form a modified Hartley oscillator. The varactor CR101E is part of a matched set of five varactors so the preselector will track the VCO. C149 determines the range of the tuning voltage, the smaller the capacitor the larger the tuning range must be to maintain the same frequency range. C249 and R299 provide bias stability. The tuning range is 118.00 MHz at 2.5 V and 151.375 MHz at 8.0 V.

4.3.2.5 VCO Buffer

Q109 and its associated parts form the VCO buffer. The VCO buffer provides isolation from the transmit buffers and the mixer as well as amplifying the signal to about +7 dBm to the mixer.

4.3.2.6 Digital Buffer

Q106, Q107 and their associated parts form the digital buffers. The VCO is very lightly coupled to the digital buffers through C147 so that noise from the pre-scaler will not get back to the VCO. The signal is coupled to the pre-scaler through C140 at about 500 mV.

4.3.2.7 Transmit Buffers

The transmit buffers contain two stages of amplification. The RF signal is coupled through C155 to Q110 and amplified. C157 couples the collector of Q110 to Q126. Q126 amplifies the signal to approximately 24 dBm. The signal is coupled through CR117 and C228 to create the transmit drive. The drive level is adjusted for different transmitters by the resistor R1006. Q111 and Q139 are turned off during receive allowing Q110 and Q126 to be reversed biased. Q127 is also turned off during receive preventing CR117 from being turned on. During receive the RF signal is reduced by 50 dB.

4.3.3 Modulator

4.3.3.1 Microphone Input Circuit

The microphone is connected to pin K of the rear panel connector. Mic bias is supplied by R114 and R223. The signal passes through C191 to the Mic Gain control. Q119 is turned on during transmit to pass the signal to the modulator compressor.

4.3.3.2 Modulator Compressor

The audio signal is coupled through C230 to the input of the compressor amplifier, I113A. The output is fed to the modulator amplifier, I113B will begin to discharge C198 when the output of the modulator exceeds the voltage across R267. Discharging C198 lowers the gate to source voltage on Q120, which reduces the drain to source resistance on Q120. As Q120 is turned on the amplitude at C230 is reduced. This maintains a constant amplitude out of the compressor amplifier. R267 set the modulation level. The bias network R257 and R267 is run off of the mod bias voltage, so that when the mod bias sags the modulation will decrease preventing distortion.

4.3.3.3 Modulator Amplifier

The output of the compressor amplifier is coupled to the modulator amplifier through C194. The output is coupled to the modulator through C196 and T108.

4.3.3.4 Modulator Bias

The modulator bias (mod bias) regulates the supply voltage to just below half the supply voltage. Q123 is the regulating transistor and on the 28 volt versions Q122 is used to buffer the regulating transistor. The KY 96A drops the modulator bias an additional 6.2 volts through CR123. R251, R254, and R256 set the regulated voltage, with R256 being adjustable. CR115 prevents overvoltage problems. RT101, R250, and R252 set the power reduction due to a thermal overload. When RT101 becomes hot, the resistance goes up reducing the voltage at E113, causing CR114 to turn on, and thus lowers the bias on Q123.

4.3.3.5 Modulator (14 Volts KY 97A)

The audio signal is applied to the primary of T108, which has a 4 to 1 turns ratio. This steps up the voltage swing on the modulator transistors Q124 and Q125 enough to make a 0 to 12 V swing to the transmitter final and driver. This output is also fed back to the modulator compressor. The mod bias is fed to the secondary of T108 providing the bias to Q125 with R247 being the current limit resistor.

4.3.3.6 Modulator (28 Volts KY 96A)

The audio signal is applied to the primary of T108, which has a 4 to 1 turns ratio. This steps up the voltage swing to the bases of the modulator transistors Q124 and Q130 enough to make a 1 to 12 V swing on the transmitter final and driver. This output is also fed back to the modulator compressor. The mod bias is fed to the secondary of T108 providing the bias to Q124 and Q130 with R247 being the current limit resistor.

4.3.4 Transmitter

4.3.4.1 RF Amplifier

RF is fed from the transmit buffers to the RF amp, on the transmitter board, through a miniature 50 ohm coaxial cable. The drive level is approximately 15 dBm. During receive the RF is attenuated as the TX(not) line goes high it turns on Q404 shorting the drive to ground and removing the bias from pin diode CR403 to "OPEN" the input to Q401. During transmit, the base current is supplied through R401 and CR403 to operate Q401 class A. Transformer T401 is broadband tuned and steps the collector impedance down to the input impedance of the driver.

4.3.4.2 Driver Q402

RF drive is fed through C412 and C437 to the driver, Q402. The driver is operated class C and the collector is modulated through T402. The collector is broadband tuned and is coupled to the final by T402.

4.3.4.3 Final

Capacitor C415, C416, and C440 form the input matching network for the final power amplifier, Q403. The final is operated class C and is modulated at the collector. The low collector output impedance is stepped up to approximately 50 ohms by transformer T403.

4.3.4.4 Low Pass Filter

A three section elliptical low pass filter is placed between the final and the antenna to attenuate all harmonics which may be generated in the transmitter. During transmit the T/R diodes CR401 and CR402 are reversed biased to protect the receiver from 5 watts of power.

4.3.5 Microprocessor

4.3.5.1 Communication to Synthesizer PLL I702

The microprocessor (uP), pin 32, sends two 24 bit serial data streams to the synthesizer PLL IC (I103) on the main board. Only the last 20 bits are used by the synthesizer PLL IC. The first stream provides the crystal divide ration and the second provides the frequency to be divided. Each data bit is clocked from pin 33 of the uP. At the end of each data stream, a high going strobe pulse is sent from pin 28 of the uP to latch the last 20 bits of data into the synthesizer PLL IC.

When the synthesizer is locked, pin 25 (Lock Detect) of uP is pulled high from the synthesizer PLL IC I103. If pin 29 (Mic key(not)) of uP is low, pin 22 (TX) of the uP is taken high to turn on the transmitter when synthesizer is in lock. The gate of Q701 must be pulled low for the uP to take TX high. Then TX is inverted through Q707 to turn on the transmitter.

4.3.5.2 Communication to Non-Volatile Memory

When the non-volatile memory (I704) is being addressed, pin 24 of the uP is high. When reading from the memory, a 16 bit serial code/ address stream is sent out on pin 32 of the uP, then a serial 16 bit data stream associated with the address is read back on pin 31 of the uP. When writing to the memory, a 16 bit serial code/ address stream followed by a 16 bit serial data stream associated with the address, are sent out of pin 32 of the uP. Only the last 9 bits of the 16 bit code/ address stream are used by the non-volatile memory. Each bit of the code/ address and data streams is clocked from pin 33 of the uP.

4.3.5.3 Communication to Analog to Digital Converter

When the analog to digital converter (A/D) (I706) is addressed, pin 23 of the uP is low. A serial 8 bit address stream is sent to the A/D from pin 32 of the uP requesting conversion data. Simultaneously, a serial 8 bit data stream of the last requested conversion data is received from the A/D on pin 31 of the uP. This makes communication full duplex. Only the first 4 bits of the address stream are used by the A/D. Each bit of the address and conversion data streams is clocked from pin 33 of the uP.

The A/D uses a system clock for its conversion time. The 496.875 kHz system clock is generated from I705, a binary counter. The 3.975 MHz clock signal (synthesizer PLL IC) on pin 1 of I705 is divided by 8, then output on pin 9 of I705.

4.3.5.4 Microprocessor Reset Circuit

During normal operation the output on pin 13 of I701A is 5 volts DC. The 5 volts DC on pin 40 (Vdd) of the uP, is produced through the 5 volt regulator I108 on the main board. On power up, the 9 volts on the input of I108 must reach 7.3 volts DC before 5 volts DC is produced on the output of I108. Therefore, on power up the uP (pin 1) is held in reset until the 9 volt DC reaches 7.9 volts DC. Pin 11 of I701A must reach 6.2 volts DC to accomplish this. On power down, the 9 volt DC must drop to 7.5 volts DC before the uP is put into reset.

4.3.5.5 Display

The display is a liquid crystal (LCD) type with three sections (“USE,” “STBY,” and “CHAN”). The “USE” frequency, which is the active frequency, is displayed in the “USE” window at all times. A standby frequency, which can be exchanged with the “USE” frequency, is displayed in the “STBY” window when in standby entry mode. When in channel or program mode, the channel frequency is displayed in the “STBY” window and the channel number is displayed in the “CHAN” window. When in channel mode the letters “CH” are displayed between the “CHAN” and “STBY” windows. When in program mode the letters “PG” are displayed to the left of the “STBY” window. The letters “TX” are displayed to the right of the “USE” window during transmit.

The uP I702 sends a 112 bit serial stream through pin 10 to pin 1 of I801 (LCD driver) on the display board. The serial stream contains backplane/ mode and segment information. Each bit is clocked through pin 11 of the uP I702.

The LCD display viewing angle is controlled by the bias provided by I801 to the display. The output of the voltage divider formed by R755, R801, and R802 is applied to the base of Q803. The collector of Q803 is connected to +5 Vdc, and the emitter is connected to I801 pin 12 which provides I801 with a reference voltage, which sets the bias level applied to the display by I801.

The display brightness is controlled in three different ways, dimming through the aircraft 14 or 28 Vdc lighting bus or half brightness all the time.

When the aircraft 14 Vdc lighting dimmer bus is selected, pins 7 and 9 of I702 are low and pin 8 of I702 is high. This turns on Q704 thereby pulling E705 low which supplies a ground to 3 of the 6 light bulbs for the LCD display backlighting. Q705 is off allowing the 14 Vdc lighting voltage to pass through CR703 to E704 to supply +14 Vdc across two sets of 3 light bulbs in series for the LCD display backlighting.

When the aircraft 14 Vdc Max lighting option is selected, pin 9 of I702 is low and pins 7 and 8 of I702 are high. This causes Q704 and Q705 to be on, placing E704 at ground and E704 at +14 Vdc.

When the aircraft 28 Vdc lighting dimmer bus is selected, pin 7, 8, and 9 of I702 are low. This causes Q709 to be on, placing E705 at +28 Vdc.

When the aircraft 28 Vdc Max lighting is selected, pins 7 and 8 of I702 are low and pin 9 of I702 is high. This causes Q702 to be on and Q709 to be on thereby pulling line E705 to +28 Vdc.

4.3.6 Audio Amplifier Board

The audio amplifier board consists of a summing amplifier and a 4 watt/ 8 watt amplifier.

I1201A and associated parts form the summing amplifier. Three 500 ohm auxiliary inputs are loaded by R1201, R1202, and R1203. The summing amplifier reduces the

auxiliary inputs to the desired level to be fed to the Mic Intercom input. C1207 filters high frequency noise and C1210 filters low frequency noise. The output of the summing amplifier is routed through the main board Mic Intercom input and back through the main board Comm Audio Out.

Comm Audio In goes through R1214 and is reduced by an inverting amplifier, I1201B, to prevent distortion through the FET switch, Q1202. The gate of Q1202 is pulled up by R1219 allowing Q1202 to pass the audio signal. When the TX line is grounded Q1202 turns off reducing the signal by at least 40 dB.

Q1203, Q1204, Q1205, Q1206, Q1207, and Q1208 form a trans-resistive amplifier with 18 dB of gain. The feedback resistor, R1237, provides 23 dB of desensitization to gain changes due to temperature or part variations. CR1202 and CR1203 reduce crossover distortion. C1219, C1220, C1227, and C1221 reduce the gain above the audio passband to prevent oscillation. The audio drivers, Q1207 and Q1208, provide a minimum of 4 watts for 13.75 V units and 8 watts for 27.5 V units into a 4 ohm load. The output is fused by F1201 to protect the drivers. R1238 is in parallel with the fuse to provide residual audio in case the fuse blows.

THIS PAGE RESERVED

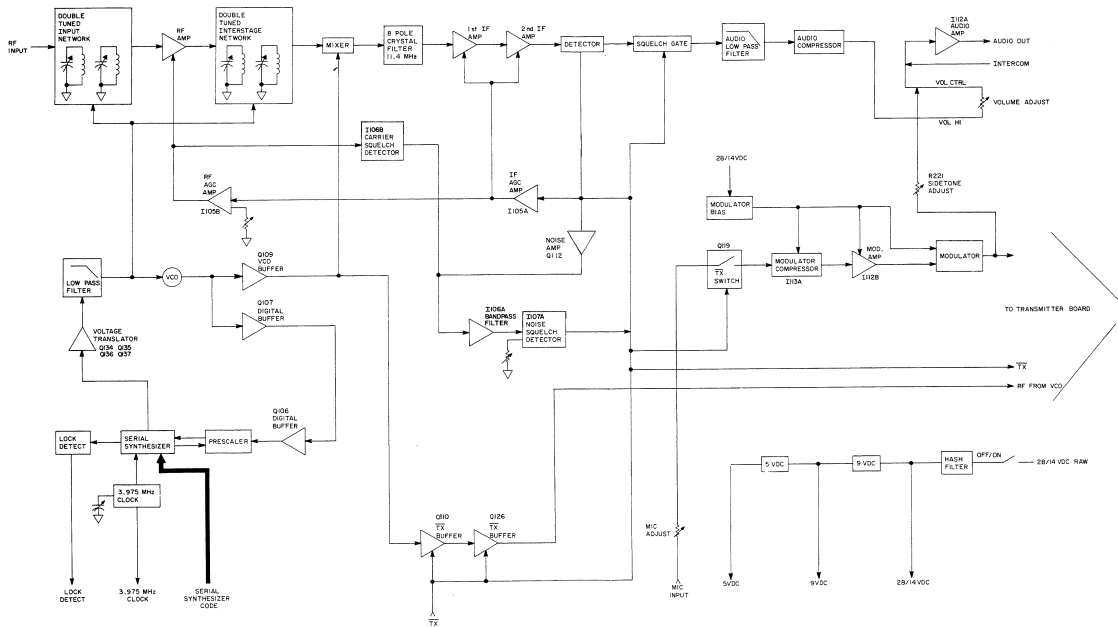


FIGURE 4-1 Receiver Block Diagram
(Dwg No 696-5674-01 Rev 0)

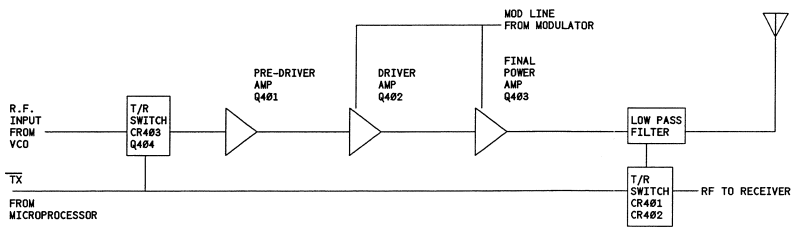


FIGURE 4-2 Transmitter Block Diagram
(Dwg No 696-5674-02 Rev 0)

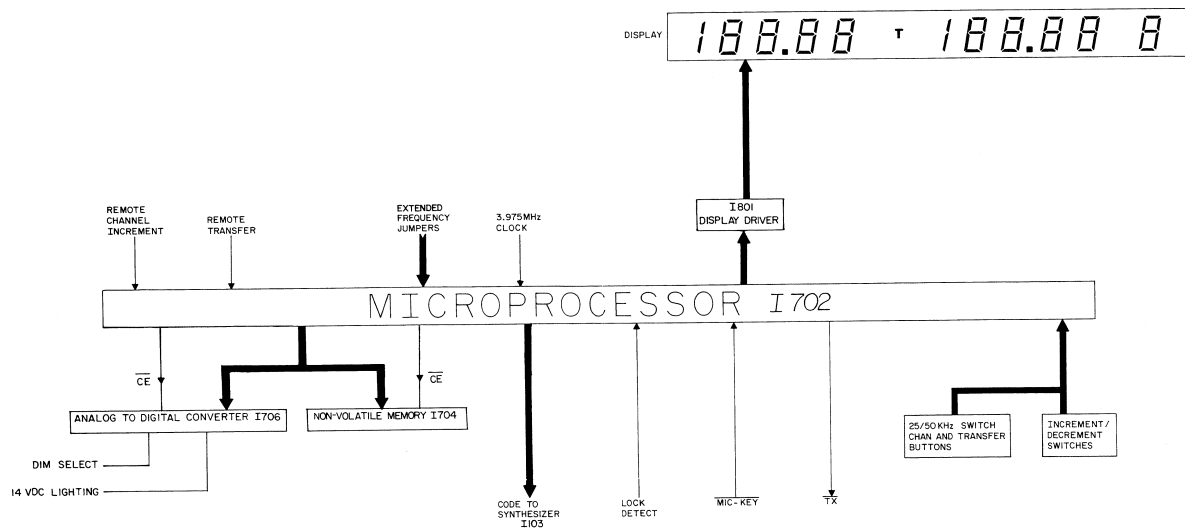


FIGURE 4-3 Microprocessor Block Diagram
(Dwg No 696-5674-03 Rev 0)

SECTION V MAINTENANCE

5.1 GENERAL INFORMATION

This section contains information on tests, alignment, inspection, cleaning, repair and troubleshooting procedures for the KY 96A, KY 97A.

Before maintenance of the KY 96A, KY 97A is attempted, a thorough understanding of the theory of operation ([Section IV](#)) is recommended.

5.1.1 Standard Test Signal Description

5.1.1.A. “Hard” microvolts indicates use of a 6dB pad between the signal generator and the receiver. (Example: A receiver with 6 dB S+N/N at 2 uV hard must have 1 uV of sensitivity).

5.1.1.B. A standard modulator test signal is a 0.4 Vrms, 1 kHz tone, open circuit, with the network shown in [Figure 5-3](#).

5.1.1.C. A standard audio test signal is an RF carrier amplitude modulated 30% at 1,000 +/- 100 Hz.

5.2 TEST EQUIPMENT

5.2.1 REQUIRED TEST EQUIPMENT

The following test equipment, or equivalent, is required to properly align and test the KY 96A, KY 97A. All test equipment must be calibrated before attempting alignment.

TABLE 5-1 Required Test Equipment

| TYPE | CHARACTERISTICS | REPRESENTATIVE MODELS |
|---------------------------|-----------------|-----------------------------------|
| Power Supply | 27.5 V @ 6 amps | Sorensen SRL 40-6 or equivalent. |
| RF Signal Generator | | Boonton Model 211A or equivalent |
| Audio Signal Generator | | HP 200CD |
| Digital Multimeter | | Fluke 8000A |
| RF Wattmeter | | Bird Model 611 |
| Frequency Counter | | HP 5245L |
| Audio Wattmeter with Load | | Eico Model 261 |
| Oscilloscope | | Tektronix Model 454 or equivalent |
| RF Signal Generator | | HP 606A |

TABLE 5-1 Required Test Equipment

| TYPE | CHARACTERISTICS | REPRESENTATIVE MODELS |
|--------------------|-----------------|----------------------------|
| Linear Detector | | Figure 5-2 |
| Mic Test Circuit | | Figure 5-3 |
| 40 dB Attenuator | | Figure 5-4 |
| Bench Test Harness | | Figure 5-5 |

TABLE 5-2 Optional Test Equipment

| TYPE | CHARACTERISTICS | REPRESENTATIVE MODELS |
|---------------------|-----------------|-----------------------|
| Distortion Analyzer | | |

5.2.2 TEST EQUIPMENT SETUP

Connect test equipment according to [Figure 5-1](#).

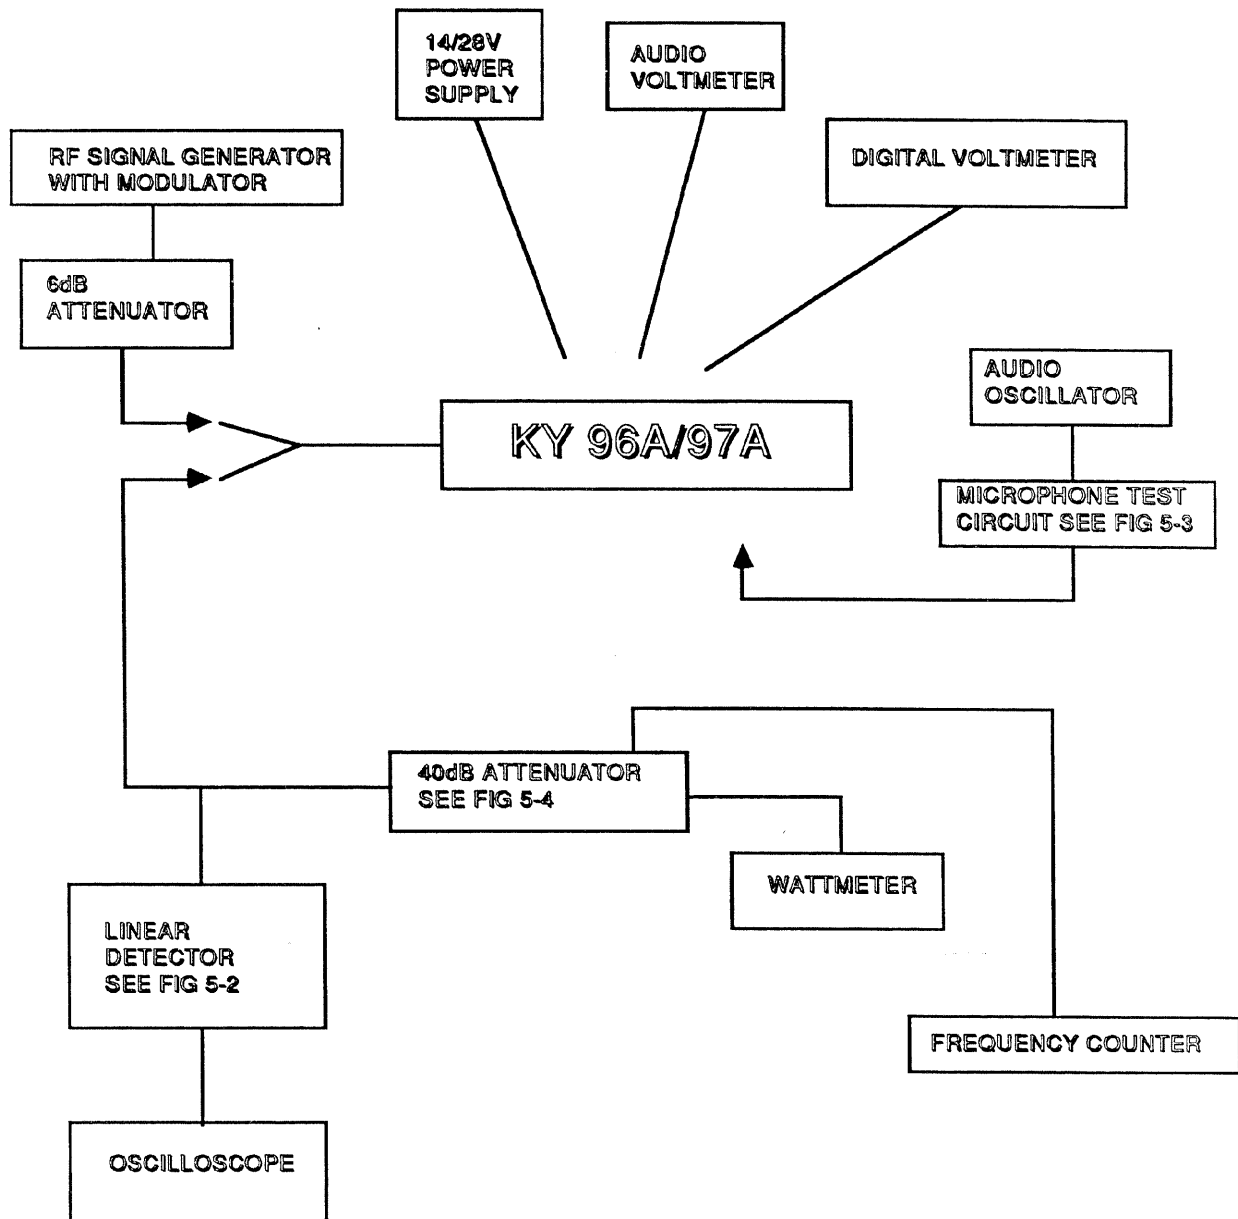


FIGURE 5-1 Typical Test Equipment Setup

5.3 PERFORMANCE TEST PROCEDURE

This section is a cover on return-to-service performance test. The unit shall pass this performance test after removal of covers, modification, alignment, or repair of the unit before return to service. The performance test can also be used to locate faults within the radio.

TEST DATA SHEET

Serial No. _____

5.3.1 Control Functions

NOTE: The term “OK” indicates that particular function is operating properly.

5.3.1.A. Display: ___OK viewing angle (straight on).

5.3.1.B. Frequency Controls:

| <u>Increment</u> | Roll Over Characteristics | <u>Decrement</u> | Roll Under Characteristics |
|------------------|---------------------------|------------------|----------------------------|
| MHz___OK | 135 to 118 MHz | MHz___OK | 118 to 135 MHz |
| | 136 to 118 MHz | | 118 to 136 MHz |
| kHz___OK | 0.975 to 0.000 kHz | kHz___OK | 0.000 to 0.975 kHz |

5.3.1.C. Transfer Button: ___OK (switches from an active to standby frequency).

5.3.1.D. Remote Transfer: ___OK (switches from an active to standby frequency).

5.3.1.E. Chan Button: ___OK (enters channel mode).

5.3.1.F. Remote Channel Increment: ___OK (increments channel).

5.3.1.G. Program Secure: Channel program secured ___OK.
Channel un-program secured ___OK.

5.3.1.H. Dim Select:

open position ___OK (Display brightness follows 13.75 V lighting bus).

grounded position ___OK (Display brightness follows 27.5 V lighting bus).

aircraft supply position ___OK (Display at half brightness).

5.3.1.I. Memory: ___OK.

When unit is turned “OFF” and then back “ON” that the last display status is the same.

5.3.1.J. 25 kHz Switch: ___OK

The 25 kHz switch increments in steps of 25 kHz.

5.3.2 Receiver

NOTE: Disable the audio compressor by grounding pin 10 on P96A1, P97A1.

5.3.2.A. Sensitivity:

5.3.2.A.1 Input a 2 uV standard audio test signal into the unit and monitor receiver audio while switching modulation off.

S+N/N: 118.000 MHz _____ NLT 6dB
 126.975 MHz _____ NLT 6dB
 135.975 MHz _____ NLT 6dB
 [136.975 MHz] _____ NLT 6dB

5.3.2.A.2 Input a 100 uV standard audio test signal into the unit and monitor receiver audio while switching modulation off.

Quieting: 126.975 MHz _____ NLT 25 dB S+N/N.

5.3.2.B. AGC Characteristics: 126.975 MHz _____ NMT 3 dB

With a standard audio test signal vary from 5 uV to 20,000 uV.

5.3.2.C. Selectivity:

Using the AGC voltage produced by a 3 uV standard signal reference, measure and record the frequencies which reproduce the AGC REF voltage at 6 dB and 60 dB above the reference input.

5.3.2.C.1 6 dB Bandwidth:

126.975 MHz:
 Above ___ ≥ 126.985 MHz Below ___ ≤ 126.965 MHz - 25 kHz units
 ___ ≥ 126.9895 MHz ___ ≤ 126.9605 MHz - 50 kHz units

5.3.2.C.2 60 dB Bandwidth:

126.975 MHz:
 Above ___ ≥ 126.995 MHz Below ___ ≤ 126.955 MHz - 25 kHz units
 ___ ≥ 127.015 MHz ___ ≤ 126.935 MHz - 50 kHz units

5.3.2.D. Volume Gain Control: Min___NMT 22mV Max___NLT 7.07V into 500 ohms

With Audio Amp board installed Max___NLT 4.5V into 500 ohms

Input a 100 uV standard audio test signal into the unit. Disable squelch by pulling the volume knob out and monitor the audio output.

5.3.2.E. Audio Distortion: (Optional)

350 Hz = ___NMT 15% 1 kHz = ___NMT 15% 2.5 kHz = ___NMT 15%

Input a 100 uV 85% modulated signal between 350 Hz and 2500 Hz. The distortion shall be not more than 15% at 7.07 Vrms into 500 ohms. Modulation

is referenced to 1 kHz, compressor enabled. (This is an optional test that requires a distortion analyzer).

5.3.2.F. Audio Response:

350 Hz = ___NMT 6dB down 1 kHz = ___ 0dB 2.5 kHz = ___NMT 6dB down

Input a 100 uV standard audio test signal into the unit. Disable the audio compressor by grounding pin 10 on P96A1, P97A1. Monitor the receiver output.

5.3.2.G. Compressor: _____NMT +/- 3 dB

Input a 100 uV standard audio test signal into the unit. Vary the modulation from 30% to 85%.

5.3.2.H. Squelch:

NOTE: Squelch adjustments must be performed in the following order:

5.3.2.H.1 Set the unit to 126.975 MHz.

5.3.2.H.2 Carrier/Noise Squelch set to open at 2 uV (+1 uV, -0.5 uV) and close at NMT 4 dB below the squelch opening.

5.3.2.H.3 Carrier/Noise Squelch _____OK.

5.3.2.H.4 With unit set to 126.975 MHz, input an 8 kHz 85% modulated signal into the unit. Set the carrier squelch to open at +/- 12.5 uV.

5.3.2.H.5 Carrier Squelch _____OK.

5.3.2.H.6 Intercom: _____ NLT 100 mW into 500 ohm.

Input a 100 mV 1 kHz signal into Mic Intercom, pin K of P96A1, P97A1.

5.3.3 Transmitter

5.3.3.A. RF Power Output:

Connect a wattmeter to the antenna output and record the following unmodulated values.

Set A + input to _____ 13.75 Vdc @ pin 11 _____
 _____ 27.5 Vdc @ pin 12 _____

118.00 MHz _____ 5.0 watts Min. 13.75 V units
 _____ 5.0 watts Min. 27.5 V units

126.97 MHz _____ 5.0 watts Min. 13.75 V units
 _____ 5.0 watts Min. 27.5 V units

135.97 MHz _____ 5.0 watts Min. 13.75 V units
 _____ 5.0 watts Min. 27.5 V units

After 2 minutes continuous key:

NOTE: Units with Mic-key Disable will shut down transmitter after 2 minutes. To extend transmit time re-key transmitter.

118.00 MHz _____ 1.25 watts Min. 13.75 V units
 _____ 1.25 watts Min. 27.5 V units

126.97 MHz _____ 1.25 watts Min. 13.75 V units
 _____ 1.25 watts Min. 27.5 V units

135.97 MHz _____ 1.25 watts Min. 13.75 V units
 _____ 1.25 watts Min. 27.5 V units

Low Voltage:

With a low line voltage input the following values should be observed:

22 Vdc for 27.5 V units
 11 Vdc for 13.75 V units

118.00 MHz _____ 1.25 watts Min. 13.75 V units
 _____ 1.25 watts Min. 27.5 V units

126.97 MHz _____ 1.25 watts Min. 13.75 V units
 _____ 1.25 watts Min. 27.5 V units

135.97 MHz _____ 1.25 watts Min. 13.75 V units
 _____ 1.25 watts Min. 27.5 V units

5.3.3.B. Modulation Capability:

Input a standard modulator test signal into the microphone audio. Using the linear detector, measure the Tx modulation.

5.3.3.B.1 118.000 MHz _____ NLT 70%
 126.97 MHz _____ NLT 70%
 135.97 MHz _____ NLT 70%

5.3.3.B.2 Carrier Noise Level:

Modulate the carrier with 70% at 1000 Hz.
 Noise on the carrier with modulation removed shall be NLT:

118.00 MHz ___ 40dB 126.97 MHz ___ 40dB 135.95 MHz ___ 40dB

5.3.3.B.3 Demodulated Audio Distortion (Optional):

350 Hz = ___ 15% Max 1 kHz = ___ 15% Max 2.5 kHz = ___ 15% Max

(This is an optional test that requires a distortion analyzer).

5.3.3.B.4 Sidetone Audio Response:

350 Hz = ___ NMT 6dB down 1 kHz = ___ 0 2.5 kHz = ___ NMT 6dB down

Input a standard modulator signal, except voltage is 0.2 Vrms, into Mic Audio. Monitor the audio output.

5.3.3.B.5 Demodulated Audio Response:

350 Hz = ___ NMT 6dB down 1 kHz = ___ 0 2.5 kHz = ___ NMT 6dB down

Input a standard modulator signal, except voltage is 0.2 Vrms, into Mic Audio. Observe the demodulated RF output from the linear detector on an audio wattmeter.

5.3.3.C. Frequency Stability: _____ NMT +/- 200 Hz

Measured after 2 hours "OFF" period.

5.3.4 Audio Amplifier

5.3.4.A. Mute: _____ NLT 40 dB down

With the volume control at minimum and a 1 kHz 4.47 V audio signal applied to AUX1 audio input when the PTT input is NMT + 0.5 volts.

5.3.4.B. Audio Output Power:

5.3.4.B.1 Comm _____ (4 W min/ 13.75 V unit, 8 W min/ 27.5 V unit)

Insert a 100 uV RF carrier modulated 30% at 1 kHz into the unit. Monitor the 4 ohm audio output.

5.3.4.B.2 Aux1 _____ (4 W min/ 13.75 V unit, 8 W min/ 27.5 V unit)

Insert a 1 kHz 4.47 V (40 mW @ 500 ohms) for 27.5 V units, 3.16 V (20 mW @ 500 ohms) for 13.75 V units, audio signal into the Aux1 input. With the volume control at minimum, monitor the 4 ohm audio output.

5.3.4.B.3 Aux2 _____ (4 W min/ 13.75 V unit, 8 W min/ 27.5 V unit)

Insert a 1 kHz 4.47 V (40 mW @ 500 ohms) for 27.5 V units, 3.16 V (20 mW @ 500 ohms) for 13.75 V units, audio signal into the Aux2 input. With the volume control at minimum, monitor the 4 ohm audio output.

5.3.4.B.4 Aux3 _____ (4 W min/ 13.75 V unit, 8 W min/ 27.5 V unit)

Insert a 1 kHz 4.47 V (40 mW @ 500 ohms) for 27.5 V units, 3.16 V (20 mW @ 500 ohms) for 13.75 V units, audio signal into the Aux3 input. With the volume control at minimum, monitor the 4 ohm audio output.

5.3.4.C. Quieting: S+N/N _____ dB (NLT 25 dB)

Input a 100 uV standard audio test signal into the unit. Disable the compressor by grounding pin 10 of J97A1, J96A1. Monitor the 4 ohm audio output while removing modulation.

5.3.4.D. Audio Frequency Response:

5.3.4.D.1 Comm 350 Hz _____ dB
 1 kHz _____ dB
 2.5 kHz _____ dB

Input a 100 uV standard audio test signal into the unit.

5.3.4.D.2 Aux1 350 Hz _____ dB
 1 kHz _____ dB
 2.5 kHz _____ dB

Insert a 1 kHz 4.47 V (40 mW @ 500 ohms) audio signal into the Aux1 input.

5.3.4.E. Audio Distortion: (Optional test requiring distortion analyzer)

5.3.4.E.1 Comm 350 Hz _____ % (NMT 15%)
 1 kHz _____ % (NMT 15%)
 2.5 kHz _____ % (NMT 15%)

5.3.4.E.2 Aux1 350 Hz _____ % (NMT 15%)
 1 kHz _____ % (NMT 15%)
 2.5 kHz _____ % (NMT 15%)

5.4 ALIGNMENT PROCEDURE

The following procedure is for aligning a KY 96A, KY 97A to meet the minimum performance specifications. If partial alignment is desired, use only the initial control settings that apply to the section being aligned.

5.4.1 Initial Control Settings

| | | |
|-------|---------------------|---------------------|
| R176 | Noise Squelch | Max CW |
| R267 | Modulation | Max CW |
| R184 | RF AGC | Max CCW |
| R221 | Sidetone | Mid Range |
| R1009 | Mic Gain | Mid Range |
| R801 | Volume Control | Max CCW (off) |
| R801 | Squelch Test Switch | Out (test position) |

5.4.2 Voltage Regulator Test

Connect the unit to RF load and apply power. Advance the volume control R802 (R902) CW to turn on and set to MID-RANGE.

5.4.2.A. Read the voltage at TP103 and adjust R189 for 9 volts +/- 0.1 volt.

5.4.2.B. Read the voltage at TP104 and observe 5.0 volts +/- 0.25 volt.

5.4.3 VCO Adjust

Set frequency to 135.975 MHz and put unit in transmit mode.

Adjust the Tx frequency to 135.975 MHz using C134. This should be done within 60 seconds of turn on.

Put unit in receive mode. Read voltage at TP102 and adjust T105 for 7.1 volts.

5.4.4 Viewing Angle Adjust

The viewing angle adjust is accessible through an opening on the left side of the unit front panel. The viewing angle adjust is operator adjustable, and is to be set for optimum display viewing angle by the operator. No alignment is necessary for unit maintenance or repair.

5.4.5 Transmitter

5.4.5.1 Power Set

Adjust R256 to obtain minimum rated power across the band, unmodulated.

Adjust C418 for minimum power variation across the band.

KY 96A 5 watts

KY 97A 5 watts

5.4.5.2 Modulator Adjust

Set the frequency selector to 128.50 MHz. Apply a 0.4 volt 1 kHz standard test signal to the microphone input and key the transmitter.

Observe the demodulated RF output from the linear detector on an oscilloscope and adjust R1009 for 85% modulation.

Adjust R267 for 70% modulation. Check 118.00 MHz and 135.975 MHz and re-adjust only if the modulation is lower than 70%.

5.4.5.3 Sidetone Adjust

Apply a 0.4 volt 1 kHz standard test signal to the microphone input and key the transmitter. Adjust R221 for 4 mW of audio into a 500 ohm load.

5.4.6 Receiver Alignment

5.4.6.1 RF/IF Alignment

The following alignment is to be made at 128.50 MHz. Connect the unit to the RF signal generator through a 6 dB pad. Turn unit on with squelch and compressor disabled and apply sufficient RF signal for approximately 4.75 volts dc at TP105.

Load and tune L101, L103, L105 and L107 using a 220 ohm resistor from the top of each tank to ground in the following sequence.

Load L103 tune L101

Load L101 tune L103

Load L107 tune L105
Load L105 tune L107

Adjust T101, T102, T103, and T104 for maximum ACG voltage. During the above adjustments, the RF signal should be reduced to keep the AGC voltage near 4.75 volts.

5.4.6.2 Noise Squelch Adjustments

Apply 2.0 uV (Hard) of RF modulated 30% with 1 kHz and adjust R176 CW until the receiver just breaks squelch (audio present).

5.4.6.3 Carrier Squelch Adjustments

Apply a 128.50 MHz, 12.5 uV (Hard) signal into the antenna connector modulated 85% at 8 kHz and slowly adjust R184 until squelch just breaks (audio present).

5.4.6.4 Climax Filter Adjustments

Apply a 128.50 MHz, 100 uV (Hard) signal modulated 85% at 4.5 kHz. Disable the compressor/ squelch. Monitor the audio output with an audio wattmeter. Adjust L110 for minimum output (Null).

5.5 OVERHAUL

5.5.1 Visual Inspection

The following visual inspection procedures should be performed during the course of maintenance operations.

5.5.1.1 Inspect all wiring for frayed, loose, cracked, or burned wires.

5.5.1.2 Check that cable connections are free of corrosion and are properly secured.

5.5.1.3 Check all components for evidence of overheating, breakage, vibration, corrosion, or loose connections.

5.5.1.4 Check all capacitors and transformers for leaks, bulges, or loose connections.

5.5.1.5 Inspect relay and switch contacts for pits or arcing.

5.5.2 Cleaning

5.5.2.1 Use a clean, lint-free cloth, lightly moistened with an approved cleaning agent to remove foreign matter from the unit case and front panel. Wipe dry with a clean, dry, lint-free cloth.

5.5.2.2 Use a hand controlled dry air jet (not more than 15 psi) to blow the dust from inaccessible areas.

- 5.5.2.3 Clean electrical contacts with a burnishing tool or cloth lightly moistened with an approved contact cleaner.
- 5.5.2.4 Clean the receptacles and plugs with a hand controlled dry air jet (not more than 25 psi) and a clean, lint-free cloth, lightly moistened with an approved cleaning agent. Wipe dry with a clean, dry, lint-free cloth.

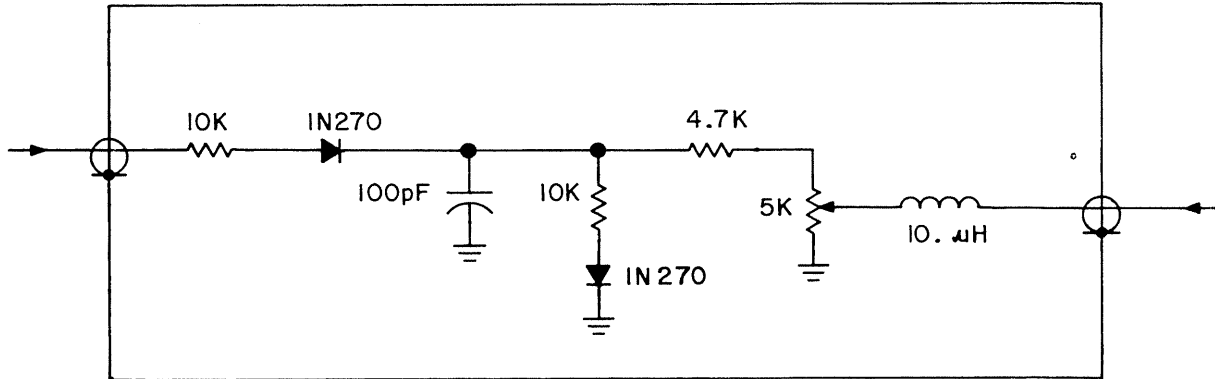


FIGURE 5-2 Linear Detector

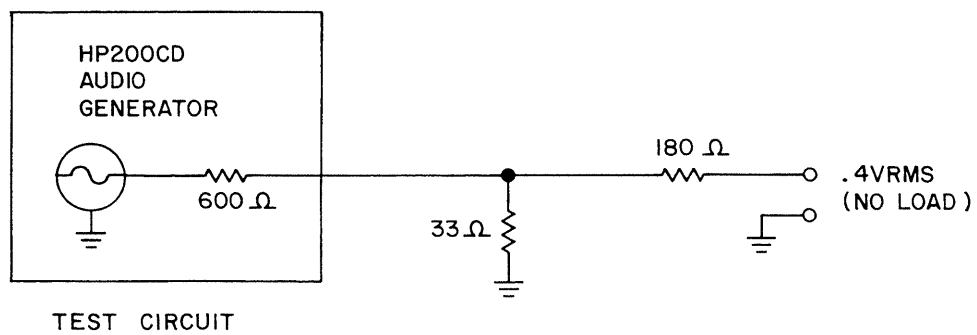


FIGURE 5-3 Mic Test Circuit

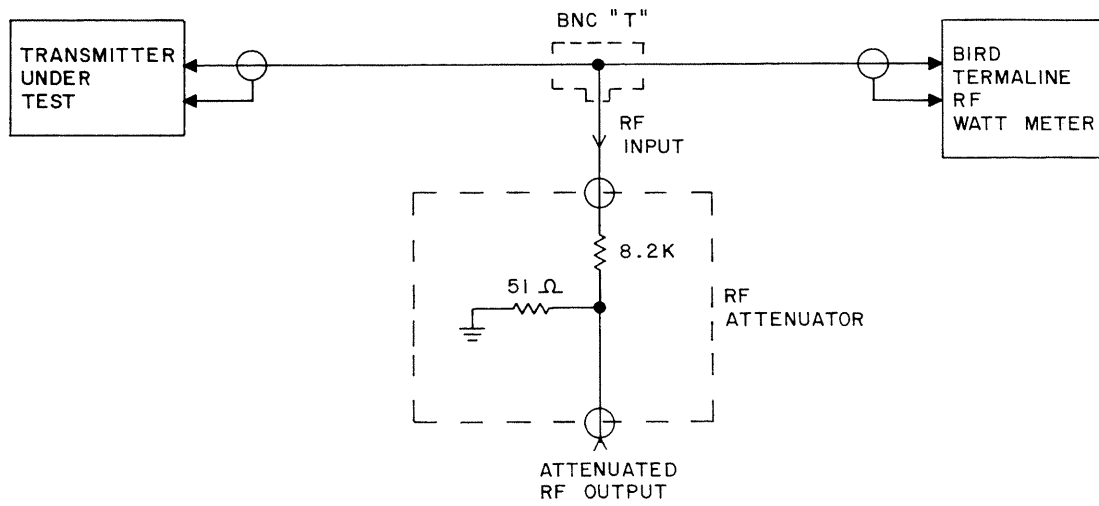


FIGURE 5-4 40 dB Attenuator

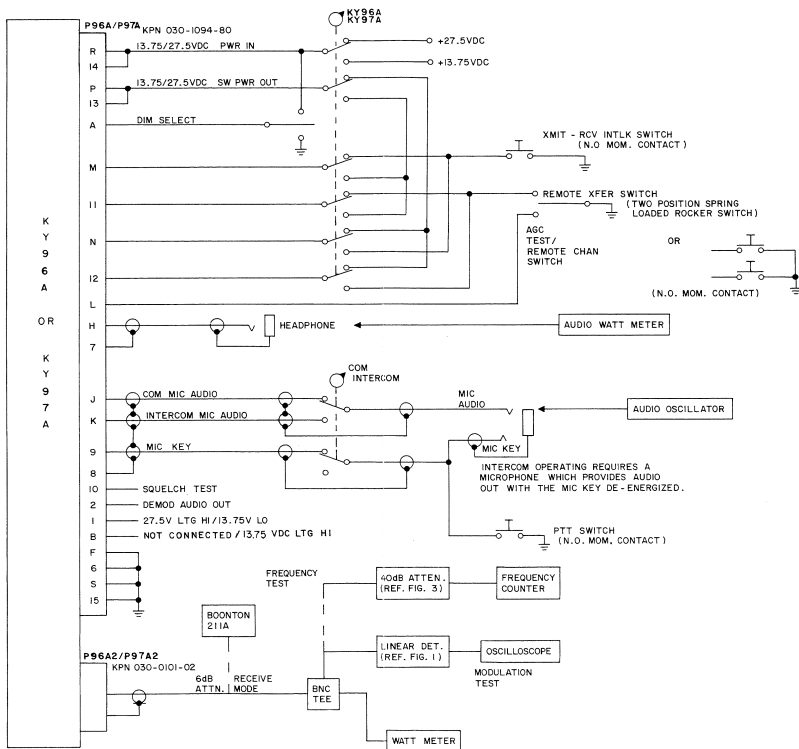


FIGURE 5-5 Bench Test Harness

SECTION VI ILLUSTRATED PARTS LIST

6.1 INTRODUCTION

The Illustrated Parts List (IPL) contains parts lists of assemblies and discrete components required for the unit. The IPL provides the proper identification and part number of each replacement part. The IPL starts with the top assembly and continues in sequence with the sub-assembly parts lists. Mechanical parts are grouped separately from electrical parts on each sub-assembly parts list. Each parts list is followed by the assembly drawing for that assembly. Parts lists may also be called “bills of material” or “BOM.” Parts identified in this IPL meet design specifications for this equipment and are recommended replacement parts. Warranty information concerning replacement parts is contained in Service Memo #1, P/N 600-08001-00XX.

6.2 BILL OF MATERIAL DESCRIPTION

This section describes the various items that may appear on parts lists. Refer to [figure 6-0](#) for the parts list format.

6.2.1 PARTS LIST (ASSEMBLY) NUMBER

Each parts list is labeled with the assembly part number at the top of the list. The assembly number is followed by the assembly description and the revision level of the parts list.

6.2.2 SYMBOL COLUMN

The symbol column contains the reference designators of electrical components on the assembly. Some mechanical parts and assembly supplies may be assigned the ITM designator. Reference documents may be assigned the REF designator. The reference designator contains a letter abbreviation to indicate the type of component, and the sequence number assigned to that part (C101, Q101, etc.). Common reference designator abbreviations are listed in Table 6-1.

Table 6-1: Reference Designator Abbreviations

| | |
|----|-------------------------|
| B | Motor, Synchro |
| C | Capacitor |
| CF | Capacitor Filter |
| CJ | Circuit Jumper |
| CQ | Capacitor |
| CR | Diode |
| D | Diode |
| DS | Lamp |
| E | Terminal, Connect Point |
| F | Fuse |

Table 6-1: Reference Designator Abbreviations

| | |
|-----|--|
| FB | Ferrite Bead |
| FL | Filter |
| FT | Feedthru |
| I | Integrated Circuit |
| ITM | Item (Non-electrical) |
| J | Jack, Fixed Connector |
| K | Relay |
| L | Inductor |
| M | Meter, Transistor |
| MX | Mixer |
| P | Plug, Removable Connector |
| Q | Transistor |
| R | Resistor |
| REF | Reference Document |
| RP | Resistor Network |
| RT | Thermistor |
| RV | Varistor |
| S | Switch |
| SK | Socket |
| SW | Switch |
| T | Transformer |
| TJ | Terminal Jack |
| TP | Test Point |
| U | Integrated Circuit, Circuit Assembly, Component Network (Resistor, Capacitor, Inductor, Transistor, Diode) |
| V | Photocell, Vacuum Tube, Varistor |
| WG | Waveguide |
| Y | Crystal |

6.2.3 PART NUMBER COLUMN

The part number column contains the Honeywell part number for each part. Special purpose part number series may appear in the parts list and are described below.

6.2.3.1 U401 122-XXXXX-9999 PLACE HOLDER

Circuit U401 is a programmed device with a -9999 place holder. Its true part number is contained on the next higher 125- P/N or 126- P/N software configuration. Refer to [Section 6.3](#), Software Documentation, in this introduction, for a description of the software documentation system.

6.2.3.2 U402 999-09999-0090 REF SFTWARE SET

Circuit U402 is a programmed device. Its true part number is contained on the next higher 125- P/N or 126- P/N software configuration. Refer to [Section 6.3](#), Software Documentation, in this introduction, for a description of the software documentation system.

6.2.3.3 CR401 999-09999-0096 RESERVED

Reference designator CR401 has been reserved for future use. The assembly does not currently include a CR401.

6.2.3.4 CR401 999-09999-0097 SEE NEXT ASSEMBLY

Diode CR401 is a part of the electrical circuit, but due to assembly or testing requirements, is actually assigned to the next assembly.

6.2.3.5 CR401 999-09999-0098 NOT USED

Reference designator CR401 is available for future assignment. The assembly does not currently include a CR401.

6.2.3.6 CR401 999-09999-0099 DO NOT USE

Reference designator CR401 has been previously used on this assembly and later deleted. It may not be reassigned on this assembly.

6.2.4 FIND_NO COLUMN

This column lists the find (item) number of a part. Find numbers of mechanical parts may appear on the assembly drawing. Find numbers of electrical parts do not appear on the assembly drawing. Find numbers are not assigned to every part and missing information in this column is not an error.

6.2.5 DESCRIPTION COLUMN

This column describes each part in the assembly. Common abbreviations in the description column are listed in Table 6-2.

Table 6-2: Description Abbreviations

| | |
|----------|-----------------------------|
| A | Ampere |
| ADC | Analog to Digital Converter |
| ADJ | Adjustable |
| AL, ALUM | Aluminum |

Table 6-2: Description Abbreviations

| | |
|-----------|---------------------------------|
| AMP | Ampere, Amplifier |
| ANT | Antenna |
| ASSY | Assembly |
| BD | Board |
| BI | Two |
| BIFLR | Bifilar |
| BLK | Black |
| BLU | Blue |
| BOM | Bill of Material (= Parts List) |
| BRN | Brown |
| CA | Cable |
| CC | Carbon Composite |
| CF | Carbon Film |
| CH | Chip, Choke |
| CAP | Capacitor |
| CER, CR | Ceramic |
| CKT | Circuit |
| CNTCT | Contact |
| CONN | Connector |
| CVR | Cover |
| DAC | Digital to Analog Converter |
| DBL | Double |
| DC | Disc Ceramic |
| DIO | Diode |
| DPDT | Double Pole Double Throw |
| DPST | Double Pole Single Throw |
| DUAL, DUO | Two |
| DWG | Drawing |
| EL | Electrolytic |
| EW | Eighth Watt |

Table 6-2: Description Abbreviations

| | |
|---------|--------------------------------|
| FC | Fixed Composition |
| FERR | Ferrite |
| FET | Field Effect Transistor |
| FHP | Flat Head Phillips |
| FLTR | Filter |
| FREQ | Frequency |
| FT | Feedthru |
| GHZ | Gigahertz |
| GND | Ground |
| GRN | Green |
| GRY | Gray |
| HDR | Header |
| HDW | Hardware |
| HEX | Six |
| HF | High Frequency |
| HV | High Voltage |
| HW | Half Watt |
| H/W | Hardware |
| IC | Integrated Circuit |
| ID, IDT | Identification |
| IF | Intermediate Frequency |
| IND | Inductor |
| INTER | Interconnect |
| INTL | Internal |
| I/O | In/Out |
| ITM | Item |
| KHZ | Kilohertz |
| LCK, LK | Lock |
| LED | Light Emitting Diode |
| LSI | Large Scale Integrated Circuit |

Table 6-2: Description Abbreviations

| | |
|-----------|--|
| MA | Milliamp |
| MC | Monolithic Ceramic |
| MF | Microfarad |
| MH | Millihenry |
| MHZ | Megahertz |
| MOD | Modification |
| MOS | Metal Oxide Semiconductor |
| MPS | Minimum Performance Specification |
| MY | Mylar |
| NF | Nanofarad |
| NPN | Negative-Positive-Negative transistor type |
| OCTAL | Eight |
| OP AMP | Operational Amplifier |
| ORG, ORN | Orange |
| OSC | Oscillator |
| PA | Power Amplifier |
| PC | Polycarbonate, Printed Circuit |
| PCB, PCBD | Printed Circuit Board |
| PENTA | Five |
| PF | Precision Film, Picofarad |
| PHP | Pan Head Phillips |
| PKG | Package |
| P/L | Parts List |
| PLD | Programmable Logic Device |
| PLL | Phase-Locked Loop |
| PLT | Plate |
| P/N | Part Number |
| PNP | Positive-Negative-Positive transistor type |
| POS | Positive, Position |
| PP | Paper |

Table 6-2: Description Abbreviations

| | |
|---------|----------------------------------|
| PRGA | Programmable Gate Array |
| PROM | Programmable Read Only Memory |
| PS | Polystyrene, Power Supply |
| PWR | Power |
| QUAD | Four |
| QW | Quarter Watt |
| RAM | Random Access Memory |
| RCVR | Receiver |
| RECPT | Receptacle |
| REF | Reference |
| REG | Regulator |
| RES | Resistor |
| RF | Radio Frequency |
| ROM | Read Only Memory |
| RX | Receive, Receiver |
| S | Silicon |
| SCH | Schematic |
| SCR | Screw |
| SFTWR | Software |
| SM | Silver Mica, Surface Mount |
| SMD | Surface Mount Device |
| SMT | Surface Mount Technology |
| S/N | Serial Number |
| SO, SOT | Small Outline |
| SPDT | Single Pole Double Throw |
| SPST | Single Pole Single Throw |
| SRAM | Synchronous Random Access Memory |
| STDF | Standoff |
| SW | Switch |
| S/W | Software |

Table 6-2: Description Abbreviations

| | |
|---------|---|
| SYN | Synthesizer |
| SYNC | Synchronizer |
| SYS | System |
| TCXO | Temperature Controlled Crystal Oscillator |
| TERM | Terminal |
| TN | Tantalum |
| TP | Test Point |
| TRI | Three |
| TRML | Terminal |
| TRNSB | Tranorber |
| TST PT | Test Point |
| TURR | Turret |
| TW | Tenth Watt |
| TX | Transmit, Transmitter |
| U | Integrated Circuit |
| UA | Microamp |
| UF | Microfarad |
| UH | Microhenry |
| UHF | Ultra High Frequency |
| UP | Microprocessor |
| V | Volt |
| VA, VAR | Variable |
| VCO | Voltage Controlled Oscillator |
| VIO | Violet |
| VHF | Very High Frequency |
| VLT | Voltage |
| W | Watt |
| W/ | With, Width |
| WHT | White |
| WW | Wire Wound |

Table 6-2: Description Abbreviations

| | |
|------|-----------------------|
| WX | Weather |
| XFMR | Transformer |
| XMIT | Transmit, Transmitter |
| XSTR | Transistor |
| XTAL | Crystal |
| YEL | Yellow |
| Z | Zener |

6.2.6 ASSEMBLY (A) COLUMN

An “A” in this column indicates that the part is a sub-assembly. Each sub-assembly has a separate parts lists following the parent assembly. If the sub-assembly is a “COMMON BOM” with a -9900, -0099, or -9999 suffix, the parts for that common assembly are included in the parent assembly parts list as a separate column.

6.2.7 UNIT OF MEASURE (UM) COLUMN

This column indicates the unit of measure for each part. Common abbreviations found in this column are listed in Table 6-3.

Table 6-3: Unit of Measure Abbreviations

| | |
|----|----------------|
| AR | As Required |
| EA | Each |
| FT | Foot |
| IN | Inch |
| RF | Reference Only |

6.2.8 VERSION AND QUANTITY COLUMN

Individual versions of an assembly are identified by the last four digits of the P/N. The quantity of parts for individual versions are listed in separate version columns -0000 through -9999. The parts indicated in -0099, -9900, or -9999 version columns are common to all versions of the assembly and constitute the “COMMON BOM.” Versions may also be called “flavors” in parts lists. The terms are interchangeable.

6.3 SOFTWARE DOCUMENTATION

Unit software configuration is documented through several dedicated part number series. If a unit contains software, the 206-XXXXX-XXXX P/N series designates the overall unit software/hardware configuration set. The 205-XXXXX-XXXX P/N series designates the software/hardware circuit board sets. The 126-XXXXX-XXXX P/N series designates non-software programmable device sets. The 125-XXXXX-XXXX P/N series designates software programmable de-

vice sets. The 122-XXXXX-XXXX P/N series designates discrete programmed devices within the 126- P/N and 125- P/N device sets.

The top unit parts list contains the 206- P/N unit software/hardware configuration set. In some cases, specific versions of 206- P/N unit SW/HW configuration sets must be used in specific versions of unit part numbers. An example of a 206- P/N unit SW/HW configuration set is shown in [figure 6-0](#), sheet 1, item “A” in the right hand margin.

The last two or four digits of software related P/N's indicate the revision number (-XXRN) of the software. Those numbers are incremented with each revision of software.


If a circuit board contains software, the applicable 205- P/N is used to order the programmed software/hardware board set. A board with software cannot be ordered by hardware 200- or 300- P/Ns. The applicable 122- P/N is used to order programmed devices. In some cases, specific versions of programmed devices must be used with specific versions of other programmed devices in the unit. Programmed devices cannot be ordered by 125- or 126- P/Ns.

6.3.1 UNIT SOFTWARE/HARDWARE SYSTEM SET

The 206- P/N is the configuration control for all unit software, software/hardware circuit boards, and programmed devices in the unit. The 206- P/N parts list contains the software identification tag and any 205- P/N software/hardware board sets. The last two or last four digits of the 206- P/N designate the software/hardware configuration version of the unit, depending on whether the unit part number is 9-digit or 12-digit.

6.3.1.1 When the unit part number is 9-digits on the TSO label, the last 2 digits of the 206- P/N are the last two digits of the software identification tag attached to the unit. The SW identification tag part number is 057-03284-00XX, where XX is the last two digits of the 206- P/N.

6.3.1.2 When the unit part number is 12-digits on the TSO label, the last 4 digits of the 206- P/N are the last 4 digits of the software identification tag attached to the unit. The SW identification tag part number is 057-05287-YYYY, where YYYY is the last four digits of the 206- P/N. The two types of software identification tags are illustrated below.



6.3.1.3 The 205- P/N software/hardware board sets used in the unit appear on the 206- P/N software/hardware configuration set parts list. An example of a 205- P/N software/hardware board set is shown in [figure 6-0](#), sheet 1, item “B” in the right hand margin.

6.3.2 SOFTWARE/HARDWARE BOARD SETS

The 205- P/N series designates software/hardware board set assemblies. The 205- P/N parts list contains 057- P/N SW/HW board labels, and contains 125- P/N software programmable device sets and/or 126- P/N non-software programmable device sets that fulfill software requirements. The 125- P/N and 126- P/N device sets contain 122- P/N programmed devices. The 205- P/N parts list also contains the 200- P/N or 300- P/N hardware circuit board.

6.3.2.1 The 057- P/N SW/HW board labels:

6.3.2.1.1 For 9-digit 205-WWWW-RN board labels, the first 7 digits are contained on a label part number 057-050WW-00WW, and the last two digits are specified by 057-05252-00RN. The revision number (RN) of the 205-WWWW-RN and the 057-05252-00RN part numbers are incremented when the revision number of any 125-0XXXX-XXRN part number is incremented. Therefore, the revision number of the 205-WWWW-RN and 057-05252-00RN part numbers will be the same.

6.3.2.1.2 For 12-digit 205-0XXXX-XXRN board labels, the first 10 digits are contained on a label part number 057-05252-XXXX, and the last two digits are specified by 057-05335-00RN. The revision number (RN) of the 205-0XXXX-XXRN and the 057-05335-00RN part numbers are incremented when the revision number of any 125-0XXXX-XXRN part number is incremented. Therefore, the revision number of the 205-0XXXX-XXRN and 057-05335-00RN part numbers will be the same. A circuit board identification tag is illustrated below.

205-06616- | 0000

6.3.2.2 The 125- software programmable device sets:

The 205- P/N SW/HW board set may contain one or more 125- P/N software programmable device sets. A 125- P/N software programmable device set contains software and one or more 122- P/N programmed devices designated for that software function. When the revision number (RN) of any one of the 122-0XXXX-XXRN programmed devices is incremented in a new software release, the revision number the 125-0XXXX-XXRN device set is also incremented. This 125- P/N parts list also specifies the “U” or “I” circuit designators for the programmed devices found on assembly drawings and schematic diagrams. Examples of 125- P/N sets are shown in [figure 6-0](#), sheet 1, items “C1,” and “C2” in the right hand margin.

6.3.2.3 The 126- P/N non-software programmable device sets:

When specified at the 205- P/N SW/HW board set level, the 126- P/N non-software programmable device set fulfills software requirements. The 126- P/N parts list contains one or more 122-0YYYY-YYRN P/N programmed devices. An example of a 126- P/N set that fulfills software requirements is shown in [figure 6-0](#), sheet 1, item “C3” in the right hand margin.

6.3.2.4 The 122- P/N programmed devices:

The 122-0XXXX-XXRN part number identifies discrete programmed devices found in both software programmable 125- P/N device sets and non-software programmable 126- P/N device sets that perform a software function. These parts also appear on the 200- P/N or 300- P/N hardware board parts list as 122-0XXXX-9999. Their true part number is found only on the 125- P/N or 126- P/N parts list.

6.3.2.5 The 200- P/N or 300-P/N hardware board:

The 200- P/N or 300- P/N hardware circuit board is specified by the 205- SW/HW board set. An example of a 200- P/N hardware board reference on a 205- SW/HW board set is shown in [figure 6-0](#), sheet 1, last line.

6.3.3 HARDWARE BOARDS WITH PROGRAMMED DEVICES

The 200- P/N or 300- P/N hardware board parts list contains 126- P/N non-software programmable device sets that fulfill hardware requirements and reference to all 122- P/N programmed devices on the hardware board.

6.3.3.1 The 126- P/N non-software programmable device sets:

The 126- P/N non-software programmable device sets that fulfill hardware requirements appear on the 200- P/N or 300- P/N parts list.

6.3.3.2 The 122- P/N programmed devices:

The 122- P/N programmed devices appear on the 200- P/N or 300- P/N parts list. These references resolve device location on the board. Component designators are placed in the SYMBOL field of the parts list to specify component location. These include 122-3XXXX-9999 or 122-0YYYY-9999 part numbers.

The 122- numbers in the form 122-3XXXX-9999 are used for non-software programmable devices (126- P/N) that fulfill hardware requirements. Examples of such 122- P/Ns are shown in [figure 6-0](#), sheet 2, items “D5” through “D10” in the right hand margin.

The 122- numbers of the form 122-0YYYY-9999 are used for both software programmable devices (125-) (Items D12 through D15, in the example), and non-software programmable devices (126-) (Item D11, in the example), that fulfill software requirements.

These programmable device sets appear on the hardware/software board (205-) parts list.

The exact programmable device (the resolution of the -9999, in the above items) is specified by the respective software programmable device set (125-), or the non-software programmable device set (126-) parts list.

Using the SYMBOL field as specified above, would discourage the use of the SYMBOL field for this purpose, in the programmable device sets (125- and 126-) parts list. This would then permit the specification of the same programmable device sets in different boards, hence different component designators. In the example, [Figure 6-0](#):

- The items flagged D1 through D4, in the right margin, are non-software programmable device sets.
- The items flagged D5 through D10, in the right margin, are non-software programmable device designators, that fulfill hardware requirements.
- The item flagged D11, in the right margin, is a non-software programmable device designator, that fulfills software requirements.
- The items flagged D12 through D15, in the right margin, are software programmable device designators, that fulfill software requirements.

Figure 6-0, while closely related to a specific product, does not represent an exact configuration in use by that product. The example has been modified to clarify certain points.

| Assy: 066-04020-0203 SG464 HSI W/O WX | | | | | | |
|---|----------------|-----|--------------------|----|----------|---------|
| Symbol | Part Number | Rev | Description | UM | Quantity | BxItm |
| | 016-01008-0004 | 3 | GLYPTAL 7526 BL | AR | 1.00 | |
| | 016-01131-0000 | 1 | CNTCT CMT BND 1055 | AR | 1.00 | |
| | 047-02579-0002 | 2 | HANDLE ASSEMBLY | EA | 1.00 | |
| | " " | " | " " " " | " | " | |
| | 047-09392-0001 | 0 | SPACER RT W/FIN | EA | 1.00 | |
| | 057-02203-0002 | 3 | FLAVOR STCKR | EA | 1.00 | |
| | 057-02203-0003 | 3 | FLAVOR STCKR | EA | 1.00 | |
| | 057-05286-0000 | 0 | SERIAL TAG SG 464 | EA | 1.00 | |
| | 075-05082-0002 | 0 | GUIDE PLATE TOP | EA | 1.00 | |
| | " " | " | " " " " | " | " | |
| | 090-00277-0000 | 1 | HOLD DOWN BRACKET | EA | 1.00 | |
| | 155-02536-0001 | 1 | CABLE ASSY | EA | 1.00 | |
| | 200-07703-0000 | 2 | DPX CONN BD ASSY | EA | 1.00 | |
| | 200-07704-0000 | 8 | LV PS BD ASSY | EA | 1.00 | |
| | 206-00118-0301 | 0 | EFS40/50 HSI SET | EA | 1.00 | <--- A |
| Assy: 206-00118-0301 EFS40/50 HSI SET | | | | | | |
| Symbol | Part Number | Rev | Description | UM | Quantity | BxItm |
| | 057-05287-0301 | 0 | SW MOD TAG | EA | 1.00 | |
| | 205-00564-0002 | 0 | EFIS 40/50 I/O PBS | EA | 1.00 | |
| | 205-00565-0004 | 0 | E40/50 HSI P/D PBS | EA | 1.00 | <--- B |
| Assy: 205-00565-0004 E40/50 HSI P/D PBS | | | | | | |
| Symbol | Part Number | Rev | Description | UM | Quantity | BxItm |
| | 057-02241-0016 | 1 | IDENT LABEL | EA | 1.00 | |
| | 057-05252-0565 | 1 | IDT 205-00565-0000 | EA | 1.00 | |
| | 125-00602-0004 | 0 | EFIS 40/50 NAV SDS | EA | 1.00 | <--- C1 |
| | 125-00603-0002 | 0 | EFIS40/50 DSPL SDS | EA | 1.00 | <--- C2 |
| | 126-00019-0000 | 1 | EFS40/50 CLIPPER | EA | 1.00 | <--- C3 |
| | 200-07706-0000 | 1 | PRCSR/DSPL BD ASSY | EA | 1.00 | |

Figure 6-0 Sample Parts List
(Sheet 1 of 4)

Assy: 200-07706-0000 PRCSR/DSPL BD ASSY

| Symbol | Part Number | Rev | Description | UM | Quantity | BxItm |
|--------|----------------|-----|--------------------|----|----------|----------|
| | 009-07706-0000 | 0 | PC BD PRCSR/DSPL | EA | 1.00 | |
| | " " | " " | " " " " | " | " | |
| | 150-00004-0010 | 3 | TUBING TFLN 22AWG | IN | 2.00 | |
| | 200-04969-0000 | 0 | EXT BD PRCSR/ADI A | RF | 0.00 | |
| | 126-00005-0000 | 1 | EFS40/50 INT LOGIC | EA | 1.00 | <--- D1 |
| | 126-00006-0000 | 1 | EFS40/50 VIDEO MUX | EA | 1.00 | <--- D2 |
| | 126-00017-0000 | 1 | EFS40/50 SM SET | EA | 1.00 | <--- D3 |
| | 126-00018-0000 | 1 | EFS40/50 SINE SET | EA | 1.00 | <--- D4 |
| C 5001 | 111-02104-0042 | 26 | CAP MC100KPF50V20% | EA | 1.00 | |
| | " " | " " | " " " " | " | " | |
| I 5005 | 122-30001-9999 | 0 | EFS40/50 VIDEO MUX | RF | 0.00 | <--- D5 |
| I 5008 | 122-30002-9999 | 0 | EFS40/50 INT LOGIC | RF | 0.00 | <--- D6 |
| | " " | " " | " " " " | " | " | |
| I 5036 | 122-30003-9999 | 0 | EFS40/50 SM HIGH | RF | 0.00 | <--- D7 |
| I 5037 | 122-30004-9999 | 0 | EFS40/50 SM LOW | RF | 0.00 | <--- D8 |
| I 5038 | 122-30005-9999 | 0 | EFS40/50 SINE HIGH | RF | 0.00 | <--- D9 |
| I 5039 | 122-30006-9999 | 0 | EFS40/50 SINE LOW | RF | 0.00 | <--- D10 |
| | " " | " " | " " " " | " | " | |
| I 5075 | 122-00958-9999 | 0 | EFS40/50 CLIPPER | RF | 0.00 | <--- D11 |
| | " " | " " | " " " " | " | " | |
| I 5138 | 122-00918-9999 | 0 | EFS40/50 HSI NAV-E | RF | 0.00 | <--- D12 |
| I 5139 | 122-00919-9999 | 0 | EFS40/50 HSI NAV-O | RF | 0.00 | <--- D13 |
| | " " | " " | " " " " | " | " | |
| I 5158 | 122-00920-9999 | 0 | EFS40/50 HSI DSP-E | RF | 0.00 | <--- D14 |
| I 5159 | 122-00921-9999 | 0 | EFS40/50 HSI DSP-O | RF | 0.00 | <--- D15 |

Assy: 126-00005-0000 EFS40/50 INT LOGIC

| Symbol | Part Number | Rev | Description | UM | Quantity | BxItm |
|--------|----------------|-----|--------------------|----|----------|-------|
| | 122-30002-0000 | 0 | EFS40/50 INT LOGIC | EA | 1.00 | |

Assy: 122-30002-0000 EFS40/50 INT LOGIC

| Symbol | Part Number | Rev | Description | UM | Quantity | BxItm |
|--------|----------------|-----|------------------|----|----------|-------|
| | 120-02376-0000 | 1 | EPLD EP320 (OTP) | EA | 1.00 | |

Assy: 125-00602-0004 EFIS 40/50 NAV SDS

| Symbol | Part Number | Rev | Description | UM | Quantity | BxItm |
|--------|----------------|-----|--------------------|----|----------|-------|
| | 122-00918-0004 | 0 | EFS40/50 HSI NAV-E | EA | 1.00 | |
| | 122-00919-0004 | 0 | EFS40/50 HSI NAV-O | EA | 1.00 | |

Assy: 125-00603-0002 EFIS40/50 DSPL SDS

| Symbol | Part Number | Rev | Description | UM | Quantity | BxItm |
|--------|----------------|-----|--------------------|----|----------|-------|
| | 122-00920-0002 | 0 | EFS40/50 HSI DSP-E | EA | 1.00 | |
| | 122-00921-0002 | 0 | EFS40/50 HSI DSP-O | EA | 1.00 | |

Figure 6-0 Sample Parts List
(Sheet 2 of 4)

| BOM NUMBER | | [200-08366-0000] MST67 IOP/DLP R: 2 MST0067A | | [200-08366-0000] MST67 IOP/DLP R: 2 MST0067A | | ASSEMBLY VERSION | |
|-------------------------------|------------------|--|--------------------|--|--------|------------------|--------|
| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | [0000] | [9900] | |
| | 009-08366-0000 | PC BD IOP/DLP | A | EA | 1.00 | 1.00 | |
| | 016-01040-0000 | COATING TYPE AR | | AR | 1.00 | 1.00 | |
| | 033-00114-0021 | SOCKET IC DIP 28C | A | EA | 3.00 | 3.00 | |
| | 047-09680-0001 | KEYING BRACKET | A | EA | 3.00 | 3.00 | |
| | 090-00087-0000 | CLIP CRYSTAL | | EA | 1.00 | 1.00 | |
| PROGRAMMABLE DEVICE SET | 092-05003-0015 | EYELET .049 | | EA | 2.00 | 2.00 | |
| | [126-00030-0000] | MST67A ASIC SFTWR | A | EA | 1.00 | 1.00 | |
| C | 9001 | 106-04104-0047 | CH 100KX7R/50V | | EA | 1.00 | 1.00 |
| C | 9002 | 106-04104-0047 | CH 100KX7R/50V | | EA | 1.00 | 1.00 |
| C | 9003 | 106-04104-0047 | CH 100KX7R/50V | | EA | 1.00 | 1.00 |
| CR | 9001 | 007-06180-0000 | DIO SW MMBD6050 | | EA | 1.00 | 1.00 |
| CR | 9002 | 007-08092-0000 | QUAD SD DIODE | | EA | 1.00 | 1.00 |
| CR | 9003 | 007-08092-0000 | QUAD SD DIODE | | EA | 1.00 | 1.00 |
| DS | 9001 | 007-06408-0000 | CDM CATH 7 SEG LED | | EA | 1.00 | 1.00 |
| J | 9002 | 030-02174-0000 | PIN CONT | | EA | 50.00 | 1.00 |
| P | 9003 | 155-02688-0003 | RIBBON CABLE ASSY | A | EA | 1.00 | 1.00 |
| Q | 9003 | 007-00065-0001 | XSTR 2N3906 (SDT) | | [EA] | 1.00 | 1.00 |
| Q | 9006 | 007-00383-0004 | SDT-23 2N2222A XST | | EA | 1.00 | 1.00 |
| Q | 9011 | 007-00530-0000 | XSTR NPN MMBT3903 | A | EA | 1.00 | 1.00 |
| R | 9001 | 130-05104-0023 | RES CH 100K EW 5% | | EA | 1.00 | 1.00 |
| R | 9002 | 015-00207-0020 | DUCTAL SD RESISTOR | | EA | 1.00 | 1.00 |
| R | 9003 | 130-05472-0023 | RES CHIP 4.7KEW5% | | EA | 1.00 | [1.00] |
| R | 9004 | 130-05471-0023 | RES CHIP 470EW5% | | EA | 1.00 | 1.00 |
| R | 9005 | 130-05104-0023 | RES CH 100K EW 5% | | EA | 1.00 | 1.00 |
| R | 9006 | 130-05104-0023 | RES CH 100K EW 5% | | EA | 1.00 | 1.00 |
| R | 9007 | 130-05000-0025 | RES CHIP 0 EW CJ | | EA | 1.00 | 1.00 |
| TP | 9001 | 008-00096-0001 | TERMINAL TEST PNT | | EA | 1.00 | 1.00 |
| TP | 9002 | 008-00096-0001 | TERMINAL TEST PNT | | EA | 1.00 | 1.00 |
| U | 9001 | 120-02208-0004 | UPRGSSR 10MHZ16B.T | A | EA | 1.00 | 1.00 |
| U | 9002 | 120-06129-0009 | 6264-15 8K X 8 RAM | | EA | 1.00 | 1.00 |
| U | 9003 | 120-06129-0009 | 6264-15 8K X 8 RAM | | EA | 1.00 | 1.00 |
| U | 9004 | 122-01195-9999 | *MST67 PRGMD ODD | A | RF | X. | |
| U | 9005 | [122-01194-9999] | *MST67 PRGMD EVEN | A | RF | X. | |
| U | 9006 | 124-00574-0003 | IC 74HCT574 | | EA | 1.00 | 1.00 |
| U | 9007 | 123-00138-0003 | [74HC138 SD PKG] | | EA | 1.00 | 1.00 |
| Y | 9001 | 044-00009-0019 | XTAL 14.75MHZ | | EA | 1.00 | 1.00 |
| Y | 9002 | 044-00293-0000 | 20 MHZ OSC | | EA | 1.00 | 1.00 |

Figure 6-0 Sample Parts List
(Sheet 3 of 4)

BOM NUMBER/DESCRIPTION/REVISION

DESCRIPTION

ASSEMBLY VERSION

200-09229-0000 GP BOARD, FPD500 REV 4

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | Q000 |
|--------|----------------|---------|----------------------|----|------|
| C2001 | 106-04224-0047 | | CAP CHIP .22UF X7R | EA | 1.00 |
| C2002 | 106-04224-0047 | | CAP CHIP .22UF X7R | EA | 1.00 |
| C2003 | 106-04224-0047 | | CAP CHIP .22UF X7R | EA | 1.00 |
| R2038 | 139-03241-0000 | | RES CH 3.25K EW 1% | EA | 1.00 |
| R2039 | 139-02430-0000 | | RES CH 243 EW 1% | EA | 1.00 |
| R2040 | 139-00750-0000 | | RES CH 75.0 EW 1% | EA | 1.00 |
| TP2001 | 008-00309-0000 | | TEST POINT SURF MN | EA | 1.00 |
| TP2002 | 008-00309-0000 | | TEST POINT SURF MN | EA | 1.00 |
| U2005 | 12051354-0001 | | PP-IC,UPD482234G5- | EA | 1.00 |
| U2006 | 12051354-0001 | | PP-IC,UPD482234G5- | EA | 1.00 |
| U2021 | 12061010-0001 | | SI-IC, MEMORY CNTLR | EA | 1.00 |
| U2022 | 12061014-0001 | | SI-IC, DSP. CONTROL | EA | 1.00 |
| Y2001 | 04416054-0015 | | XTAL OSC, 36.000MHZ | EA | 1.00 |
| Y2002 | 04416054-0014 | | XTAL OSC, 20.000MHZ | EA | 1.00 |
| | 002-09229-0000 | | GP BOARD | RF | 0.00 |
| | 009-09229-0000 | 1 | GP BOARD | EA | 1.00 |
| | 01243055-0001 | 2 | INSULATOR, THERMAL | EA | 3.00 |
| | 01250068-0001 | 3 | SPACER, HEADER | EA | 6.00 |
| | 016-01040-0000 | | COATING TYPE AR | AR | 1.00 |
| | 016-01442-0000 | 4 | E-6000 CLEAR SEALA | AR | 1.00 |
| | 192-09229-0000 | | GP BOARD | RF | 0.00 |
| | 300-09229-0000 | | GP BOARD, FPD500 | RF | 0.00 |
| | 34050-0084 | 6 | SPACER, THD'D | EA | 2.00 |
| | 46086-0007 | 5 | SCREW, CAPTIVE, 4-40 | EA | 3.00 |

REFEERENCE DESIGNATOR

PART NUMBER

FIND NUMBER

UNIT OF MEASURE

QUANTITY

Figure 6-0 Sample Parts List
(Sheet 4 of 4)

6.4 ILLUSTRATED PARTS LIST

6.4.1 KY 96A VHF Communication Transceiver

064-01052-0010 96A 25KHZ SEL REV AB
 064-01052-0011 96A 50KHZ SEL REV AB
 064-01052-0030 96A 25K SEL 136975 REV AB
 064-01052-0099 COMMOM BOM REV AD

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0010 | -0011 | -0030 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | . | . | 1.00 |
| Q113 | 007-00930-0000 | | XSTR S PNPME15029 | EA | . | . | . | 1.00 |
| Q122 | 007-00930-0000 | | XSTR S PNPME15029 | EA | . | . | . | 1.00 |
| REF1 | 300-04268-0000 | | KY96A COMM TRANSC | RF | . | . | . | .00 |
| REF100 | 000-00601-0002 | | PRODUCT STRUCTURE | RF | . | . | . | .00 |
| | 012-01005-0002 | | TAPE MYLAR .500 W | IN | . | . | . | .50 |
| | 012-01127-0000 | | TAG COVER | EA | . | . | . | 4.00 |
| | 013-00006-0001 | | FERR BEAD | EA | . | . | . | 4.00 |
| | 016-01008-0004 | | GLYPTAL 7526 BL | AR | . | . | . | 1.00 |
| | 016-01015-0000 | | IND ADH 3M 4475 | AR | . | . | . | 1.00 |
| | 016-01071-0000 | | DC RTV 3140 | AR | . | . | . | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | . | 10.75 |
| | 025-00005-0012 | | WIRE 18 RD/WH | IN | . | . | . | 9.00 |
| | 025-00018-0022 | | WIRE 26 RED | IN | . | . | . | 2.00 |
| | 025-00018-0024 | | WIRE 26 RD/YL | IN | . | . | . | 11.00 |
| | 025-00018-0092 | | WIRE 26 WH/RD | IN | . | . | . | 10.50 |
| | 025-00018-0096 | | WIRE 26 WH/BU | IN | . | . | . | 10.50 |
| | 025-05012-0000 | | WIRE 2C SHD WHTBLK | IN | . | . | . | 9.50 |
| | 030-02229-0011 | | RGT ANG HDR 3P | EA | . | . | . | 1.00 |
| | 030-02229-0013 | | RGT ANG HDR 7P | EA | . | . | . | 1.00 |
| | 030-02229-0014 | | RGT ANG HDR 6P | EA | . | . | . | 1.00 |
| | 035-01007-0020 | | CONN CVR NAS820-8 | EA | . | . | . | 1.00 |
| | 035-01361-0020 | | PROTECTIVE COVER | EA | . | . | . | 1.00 |
| | 047-04811-0001 | | COVER XMTR W/F | EA | . | . | . | 1.00 |
| | 047-08494-0501 | | TOP COVER ASSEMBLY | EA | 1.00 | 1.00 | 1.00 | . |
| | 047-08495-0002 | | COVER, BOTTOM | EA | . | . | . | 1.00 |
| | 047-08512-0004 | | MOUNTING RACK | EA | . | . | . | 1.00 |
| | 057-01540-0000 | | WARNING HV TAG | EA | . | . | . | 1.00 |
| | 057-02203-1010 | | S/N TAG FLVR BLK | EA | 1.00 | . | . | . |
| | 057-02203-1011 | | S/N TAG FLVR BLK | EA | . | 1.00 | . | . |
| | 057-02203-1030 | | S/N TAG FLVR BLK | EA | . | . | 1.00 | . |
| | 057-02312-0001 | | DECAL | EA | . | 1.00 | . | . |
| | 057-02337-0000 | | PRTCTV CVR DECAL | EA | . | . | . | 1.00 |
| | 057-03451-0001 | | S/N TAG KY96A | EA | . | . | . | 1.00 |
| | 057-03511-0001 | | DECAL, CAUTION | EA | . | . | . | 1.00 |
| | 064-01052-0099 | | COMMOM BOM | EA | 1.00 | 1.00 | 1.00 | . |
| | 073-00808-0003 | | KNOB VOLUME | EA | . | . | . | 1.00 |
| | 088-00838-0006 | | PUSH BUTTON | EA | . | . | . | 1.00 |
| | 088-02269-0003 | | BEZEL LCD | EA | . | . | . | 1.00 |
| | 088-02270-0000 | | PUSH BUTTON, RND | EA | . | . | . | 1.00 |
| | 088-02271-0000 | | LIGHTING SHAFT | EA | . | . | . | 1.00 |
| | 089-05434-0003 | | SCR FHP 3-48X3/16 | EA | . | . | . | 9.00 |
| | 089-05434-0004 | | SCR FHP 3-48X1/4 | EA | . | . | . | 8.00 |
| | 089-05874-0005 | | SCR PHP 2-56X5/16 | EA | . | . | . | 1.00 |
| | 089-05899-0003 | | SCR PHP 2-56X3/16 | EA | . | . | . | 1.00 |
| | 089-05901-0004 | | SCR PHP 3-48X1/4 | EA | . | . | . | 7.00 |
| | 089-05903-0004 | | SCR PHP 4-40X1/4 | EA | . | . | . | 3.00 |
| | 089-05925-0004 | | SCR BHP 3-48X1/4 | EA | . | . | . | 5.00 |
| | 089-06298-0004 | | SCR FHP 3-48X1/4 | EA | . | . | . | 2.00 |
| | 089-06342-0004 | | SCR PHP 3-48X1/4 | EA | . | . | . | 4.00 |
| | 090-00991-0000 | | PROTECTIVE CLOSURE | EA | . | . | . | 1.00 |
| | 091-00109-0000 | | CABLE TIE | EA | . | . | . | 2.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0010 | -0011 | -0030 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| | 091-00156-0000 | | BUSHING | EA | . | . | . | 3.00 |
| | 091-00286-0002 | | INSUL XSTR .687 | EA | . | . | . | 2.00 |
| | 150-00049-0010 | | SHRINK TUBING WHT | IN | . | . | . | 1.25 |
| | 150-00060-0001 | | SPIROBAND | IN | . | . | . | 5.25 |
| | 150-00072-0004 | | SLDR SLEEVE .62 | EA | . | . | . | 2.00 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | . | 2.00 |
| | 200-04271-0000 | | 28V MODULATOR ASSY | EA | . | . | . | 1.00 |
| | 200-07479-0000 | | LCD DISPLAY BD | EA | . | . | . | 1.00 |
| | 200-07540-0001 | | KY 96A 28V 5W TX B | EA | . | . | . | 1.00 |
| | 200-07799-0021 | | 96A MN BD 25K FUJI | EA | 1.00 | . | 1.00 | . |
| | 200-07799-0023 | | 96A MN BD 50K FUJI | EA | . | 1.00 | . | . |
| | 206-00021-0020 | | TOP SW BOM, KY96A/ | EA | 1.00 | 1.00 | . | . |
| | 206-00022-0020 | | TOP SW BOM, KY96A/ | EA | . | . | 1.00 | . |

064-01052-0031 96A 50K SEL 136975 REV AB
 064-01052-0050 96A 25KHZ W/AUDAMP REV AB
 064-01052-0051 96A 50KHZ W/AUDAMP REV AB
 064-01052-0099 COMMOM BOM REV AD

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0031 | -0050 | -0051 | -0099 |
|--------|----------------|---------|---------------------|----|-------|-------|-------|-------|
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | . | . | 1.00 |
| Q113 | 007-00930-0000 | | XSTR S PNP MJE15029 | EA | . | . | . | 1.00 |
| Q122 | 007-00930-0000 | | XSTR S PNP MJE15029 | EA | . | . | . | 1.00 |
| REF1 | 300-04268-0000 | | KY96A COMM TRANSC | RF | . | . | . | .00 |
| REF100 | 000-00601-0002 | | PRODUCT STRUCTURE | RF | . | . | . | .00 |
| | 012-01005-0002 | | TAPE MYLAR .500 W | IN | . | . | . | .50 |
| | 012-01127-0000 | | TAG COVER | EA | . | . | . | 4.00 |
| | 013-00006-0001 | | FERR BEAD | EA | . | . | . | 4.00 |
| | 016-01008-0004 | | GLYPTAL 7526 BL | AR | . | . | . | 1.00 |
| | 016-01015-0000 | | IND ADH 3M 4475 | AR | . | . | . | 1.00 |
| | 016-01071-0000 | | DC RTV 3140 | AR | . | . | . | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | . | 10.75 |
| | 025-00005-0012 | | WIRE 18 RD/WH | IN | . | . | . | 9.00 |
| | 025-00018-0022 | | WIRE 26 RED | IN | . | . | . | 2.00 |
| | 025-00018-0024 | | WIRE 26 RD/YL | IN | . | . | . | 11.00 |
| | 025-00018-0092 | | WIRE 26 WH/RD | IN | . | . | . | 10.50 |
| | 025-00018-0096 | | WIRE 26 WH/BU | IN | . | . | . | 10.50 |
| | 025-05012-0000 | | WIRE 2C SHD WHTBLK | IN | . | . | . | 9.50 |
| | 030-02229-0011 | | RGT ANG HDR 3P | EA | . | . | . | 1.00 |
| | 030-02229-0013 | | RGT ANG HDR 7P | EA | . | . | . | 1.00 |
| | 030-02229-0014 | | RGT ANG HDR 6P | EA | . | . | . | 1.00 |
| | 035-01007-0020 | | CONN CVR NAS820-8 | EA | . | . | . | 1.00 |
| | 035-01361-0020 | | PROTECTIVE COVER | EA | . | . | . | 1.00 |
| | 047-04811-0001 | | COVER XMTR W/F | EA | . | . | . | 1.00 |
| | 047-08494-0501 | | TOP COVER ASSEMBLY | EA | 1.00 | . | . | . |
| | 047-08495-0002 | | COVER, BOTTOM | EA | . | . | . | 1.00 |
| | 047-08512-0004 | | MOUNTING RACK | EA | . | . | . | 1.00 |
| | 047-12516-0501 | | TOP COVER ASSY | EA | . | 1.00 | 1.00 | . |
| | 057-01540-0000 | | WARNING HV TAG | EA | . | . | . | 1.00 |
| | 057-02203-1031 | | S/N TAG FLVR BLK | EA | 1.00 | . | . | . |
| | 057-02203-1050 | | S/N TAG FLVR BLK | EA | . | 1.00 | . | . |
| | 057-02203-1051 | | S/N TAG FLVR BLK | EA | . | . | 1.00 | . |
| | 057-02312-0001 | | DECAL | EA | 1.00 | . | 1.00 | . |
| | 057-02337-0000 | | PRTCTV CVR DECAL | EA | . | . | . | 1.00 |
| | 057-03451-0001 | | S/N TAG KY96A | EA | . | . | . | 1.00 |
| | 057-03511-0001 | | DECAL, CAUTION | EA | . | . | . | 1.00 |
| | 064-01052-0099 | | COMMOM BOM | EA | 1.00 | 1.00 | 1.00 | . |
| | 073-00808-0003 | | KNOB VOLUME | EA | . | . | . | 1.00 |
| | 088-00838-0006 | | PUSH BUTTON | EA | . | . | . | 1.00 |
| | 088-02269-0003 | | BEZEL LCD | EA | . | . | . | 1.00 |
| | 088-02270-0000 | | PUSH BUTTON, RND | EA | . | . | . | 1.00 |
| | 088-02271-0000 | | LIGHTING SHAFT | EA | . | . | . | 1.00 |
| | 089-05434-0003 | | SCR FHP 3-48X3/16 | EA | . | . | . | 9.00 |
| | 089-05434-0004 | | SCR FHP 3-48X1/4 | EA | . | . | . | 8.00 |
| | 089-05874-0005 | | SCR PHP 2-56X5/16 | EA | . | . | . | 1.00 |
| | 089-05899-0003 | | SCR PHP 2-56X3/16 | EA | . | . | . | 1.00 |
| | 089-05901-0004 | | SCR PHP 3-48X1/4 | EA | . | . | . | 7.00 |
| | 089-05903-0004 | | SCR PHP 4-40X1/4 | EA | . | . | . | 3.00 |
| | 089-05925-0004 | | SCR BHP 3-48X1/4 | EA | . | . | . | 5.00 |
| | 089-06004-0003 | | SCR FHP 2-56X3/16 | EA | . | 5.00 | 5.00 | . |
| | 089-06298-0004 | | SCR FHP 3-48X1/4 | EA | . | . | . | 2.00 |
| | 089-06342-0004 | | SCR PHP 3-48X1/4 | EA | . | . | . | 4.00 |
| | 090-00991-0000 | | PROTECTIVE CLOSURE | EA | . | . | . | 1.00 |
| | 091-00109-0000 | | CABLE TIE | EA | . | . | . | 2.00 |
| | 091-00156-0000 | | BUSHING | EA | . | . | . | 3.00 |
| | 091-00286-0002 | | INSUL XSTR .687 | EA | . | . | . | 2.00 |
| | 150-00049-0010 | | SHRINK TUBING WHT | IN | . | . | . | 1.25 |
| | 150-00060-0001 | | SPIROBAND | IN | . | . | . | 5.25 |
| | 150-00072-0004 | | SLDR SLEEVE .62 | EA | . | . | . | 2.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0031 | -0050 | -0051 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | . | 2.00 |
| | 200-04271-0000 | | 28V MODULATOR ASSY | EA | . | . | . | 1.00 |
| | 200-07475-0000 | | LCD PROCESSOR BD | EA | . | 1.00 | . | . |
| | 200-07479-0000 | | LCD DISPLAY BD | EA | . | . | . | 1.00 |
| | 200-07540-0001 | | KY 96A 28V 5W TX B | EA | . | . | . | 1.00 |
| | 200-07797-0000 | | AUDIO AMP BOARD | EA | . | 1.00 | 1.00 | . |
| | 200-07799-0021 | | 96A MN BD 25K FUJI | EA | . | 1.00 | . | . |
| | 200-07799-0023 | | 96A MN BD 50K FUJI | EA | 1.00 | . | 1.00 | . |
| | 206-00021-0020 | | TOP SW BOM, KY96A/ | EA | . | 1.00 | 1.00 | . |
| | 206-00022-0020 | | TOP SW BOM, KY96A/ | EA | 1.00 | . | . | . |

064-01052-0060 96A 25KHZ36975W/AM REV AB
 064-01052-0061 96A50KHZ36975W/AMP REV AB
 064-01052-0070 KY96A FINAL ASSY REV AF
 064-01052-0099 COMMOM BOM REV AD

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0060 | -0061 | -0070 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | . | 1.00 | 1.00 |
| Q113 | 007-00930-0000 | | XSTR S PNPME15029 | EA | . | . | 1.00 | 1.00 |
| Q122 | 007-00930-0000 | | XSTR S PNPME15029 | EA | . | . | 1.00 | 1.00 |
| REF1 | 300-04268-0000 | | KY96A COMM TRANSP | RF | . | . | .00 | .00 |
| REF100 | 000-00601-0002 | | PRODUCT STRUCTURE | RF | . | . | .00 | .00 |
| | 012-01005-0002 | | TAPE MYLAR .500 W | IN | . | . | .50 | .50 |
| | 012-01127-0000 | | TAG COVER | EA | . | . | 4.00 | 4.00 |
| | 013-00006-0001 | | FERR BEAD | EA | . | . | 4.00 | 4.00 |
| | 016-01008-0004 | | GLYPTAL 7526 BL | AR | . | . | 1.00 | 1.00 |
| | 016-01015-0000 | | IND ADH 3M 4475 | AR | . | . | 1.00 | 1.00 |
| | 016-01071-0000 | | DC RTV 3140 | AR | . | . | 1.00 | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | 11.25 | 10.75 |
| | 025-00005-0012 | | WIRE 18 RD/WH | IN | . | . | 9.00 | 9.00 |
| | 025-00018-0022 | | WIRE 26 RED | IN | . | . | 2.00 | 2.00 |
| | 025-00018-0024 | | WIRE 26 RD/YL | IN | . | . | 11.00 | 11.00 |
| | 025-00018-0092 | | WIRE 26 WH/RD | IN | . | . | 10.50 | 10.50 |
| | 025-00018-0096 | | WIRE 26 WH/BU | IN | . | . | 10.50 | 10.50 |
| | 025-05012-0000 | | WIRE 2C SHD WHTBLK | IN | . | . | 9.50 | 9.50 |
| | 030-02229-0011 | | RGT ANG HDR 3P | EA | . | . | 1.00 | 1.00 |
| | 030-02229-0013 | | RGT ANG HDR 7P | EA | . | . | 1.00 | 1.00 |
| | 030-02229-0014 | | RGT ANG HDR 6P | EA | . | . | 1.00 | 1.00 |
| | 035-01007-0020 | | CONN CVR NAS820-8 | EA | . | . | 1.00 | 1.00 |
| | 035-01361-0020 | | PROTECTIVE COVER | EA | . | . | 1.00 | 1.00 |
| | 047-04811-0001 | | COVER XMTR W/F | EA | . | . | 1.00 | 1.00 |
| | 047-08495-0002 | | COVER, BOTTOM | EA | . | . | 1.00 | 1.00 |
| | 047-08512-0004 | | MOUNTING RACK | EA | . | . | 1.00 | 1.00 |
| | 047-12516-0501 | | TOP COVER ASSY | EA | 1.00 | 1.00 | 1.00 | . |
| | 057-01540-0000 | | WARNING HV TAG | EA | . | . | 1.00 | 1.00 |
| | 057-02203-1060 | | S/N TAG FLVR BLK | EA | 1.00 | . | . | . |
| | 057-02203-1061 | | S/N TAG FLVR BLK | EA | . | 1.00 | . | . |
| | 057-02203-1070 | | S/N TAG FLVR BLK | EA | . | . | 1.00 | . |
| | 057-02312-0001 | | DECAL | EA | . | 1.00 | . | . |
| | 057-02337-0000 | | PRTCTV CVR DECAL | EA | . | . | 1.00 | 1.00 |
| | 057-03451-0001 | | S/N TAG KY96A | EA | . | . | 1.00 | 1.00 |
| | 057-03511-0001 | | DECAL, CAUTION | EA | . | . | 1.00 | 1.00 |
| | 064-01052-0099 | | COMMOM BOM | EA | 1.00 | 1.00 | . | . |
| | 073-00808-0003 | | KNOB VOLUME | EA | . | . | . | 1.00 |
| | 073-00972-0003 | | KNOB VOLUME | EA | . | . | 1.00 | . |
| | 088-00838-0006 | | PUSH BUTTON | EA | . | . | . | 1.00 |
| | 088-00838-0050 | | LIGHTING SHAFT | EA | . | . | 1.00 | . |
| | 088-02269-0003 | | BEZEL LCD | EA | . | . | . | 1.00 |
| | 088-02270-0000 | | PUSH BUTTON, RND | EA | . | . | . | 1.00 |
| | 088-02270-0001 | | PUSH BUTTON | EA | . | . | 1.00 | . |
| | 088-02271-0000 | | LIGHTING SHAFT | EA | . | . | 1.00 | 1.00 |
| | 088-03101-0007 | | BEZEL COMPL KY96A | EA | . | . | 1.00 | . |
| | 088-03130-0001 | | TRANSFER BUTTON | EA | . | . | 1.00 | . |
| | 089-05434-0003 | | SCR FHP 3-48X3/16 | EA | . | . | 9.00 | 9.00 |
| | 089-05434-0004 | | SCR FHP 3-48X1/4 | EA | . | . | 8.00 | 8.00 |
| | 089-05874-0005 | | SCR PHP 2-56X5/16 | EA | . | . | 1.00 | 1.00 |
| | 089-05899-0003 | | SCR PHP 2-56X3/16 | EA | . | . | 1.00 | 1.00 |
| | 089-05901-0004 | | SCR PHP 3-48X1/4 | EA | . | . | 7.00 | 7.00 |
| | 089-05903-0004 | | SCR PHP 4-40X1/4 | EA | . | . | 3.00 | 3.00 |
| | 089-05925-0004 | | SCR BHP 3-48X1/4 | EA | . | . | 5.00 | 5.00 |
| | 089-06004-0003 | | SCR FHP 2-56X3/16 | EA | 5.00 | 5.00 | 5.00 | . |
| | 089-06298-0004 | | SCR FHP 3-48X1/4 | EA | . | . | 2.00 | 2.00 |
| | 089-06342-0004 | | SCR PHP 3-48X1/4 | EA | . | . | 4.00 | 4.00 |
| | 090-00991-0000 | | PROTECTIVE CLOSURE | EA | . | . | 1.00 | 1.00 |
| | 091-00109-0000 | | CABLE TIE | EA | . | . | 2.00 | 2.00 |
| | 091-00156-0000 | | BUSHING | EA | . | . | 3.00 | 3.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0060 | -0061 | -0070 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| | 091-00286-0002 | | INSUL XSTR .687 | EA | . | . | 2.00 | 2.00 |
| | 150-00049-0010 | | SHRINK TUBING WHT | IN | . | . | 1.25 | 1.25 |
| | 150-00060-0001 | | SPIROBAND | IN | . | . | 5.25 | 5.25 |
| | 150-00072-0004 | | SLDR SLEEVE .62 | EA | . | . | 2.00 | 2.00 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | 2.00 | 2.00 |
| | 200-04271-0000 | | 28V MODULATOR ASSY | EA | . | . | 1.00 | 1.00 |
| | 200-07479-0000 | | LCD DISPLAY BD | EA | . | . | . | 1.00 |
| | 200-07479-0001 | | LCD DISPLAY BD | EA | . | . | 1.00 | . |
| | 200-07540-0001 | | KY 96A 28V 5W TX B | EA | . | . | 1.00 | 1.00 |
| | 200-07797-0000 | | AUDIO AMP BOARD | EA | 1.00 | 1.00 | 1.00 | . |
| | 200-07799-0021 | | 96A MN BD 25K FUJI | EA | 1.00 | . | 1.00 | . |
| | 200-07799-0023 | | 96A MN BD 50K FUJI | EA | . | 1.00 | . | . |
| | 206-00022-0020 | | TOP SW BOM, KY96A/ | EA | 1.00 | 1.00 | 1.00 | . |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| | | | |
|-------------|--------------------|--------|----------|
| 064-1052-10 | 96A 25KHZ SEL | REV 6 | KY 0096A |
| 064-1052-11 | 96A 50KHZ SEL | REV 6 | KY 0096A |
| 064-1052-30 | 96A 25K SEL 136975 | REV 6 | KY 0096A |
| 064-1052-31 | 96A 50K SEL 136975 | REV 6 | KY 0096A |
| 064-1052-50 | 96A 25KHZ W/AUDAMP | REV 7 | KY 0096A |
| 064-1052-51 | 96A 50KHZ W/AUDAMP | REV 7 | KY 0096A |
| 064-1052-60 | 96A 25KHZ36975W/AM | REV 7 | KY 0096A |
| 064-1052-61 | 96A50KHZ36975W/AMP | REV 7 | KY 0096A |
| 064-1052-70 | KY96A CROWN SERIES | REV 2 | KY 0096A |
| 064-1052-99 | COMMOM BOM | REV 15 | KY 0096A |

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | | | | | | | |
|--------|----------------|--------------------|---|----|----------|------|------|------|------|------|------|------|------|-------|-------|
| | | | | | 0010 | 0011 | 0030 | 0031 | 0050 | 0051 | 0060 | 0061 | 0070 | 0099 | |
| | 012-01005-0002 | TAPE MYLAR .500 W | | IN | . | . | . | . | . | . | . | . | . | 0.50 | 0.50 |
| | 012-01127-0000 | TAG COVER | | EA | . | . | . | . | . | . | . | . | . | 4.00 | 4.00 |
| | 013-00006-0001 | FERR BEAD | | EA | . | . | . | . | . | . | . | . | . | 4.00 | 4.00 |
| | 016-01008-0004 | GLYPTAL 7526 BL | | AR | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 016-01015-0000 | IND ADH 3M 4475 | | AR | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 016-01071-0000 | DC RTV 3140 | | AR | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 025-00005-0002 | WIRE 18 RED | | IN | . | . | . | . | . | . | . | . | . | 10.75 | 10.75 |
| | 025-00005-0012 | WIRE 18 RD/WH | | IN | . | . | . | . | . | . | . | . | . | 10.75 | 10.75 |
| | 025-00018-0022 | WIRE 26 RED | | IN | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 025-00018-0024 | WIRE 26 RD/YL | | IN | . | . | . | . | . | . | . | . | . | 11.00 | 11.00 |
| | 025-00018-0092 | WIRE 26 WH/RD | | IN | . | . | . | . | . | . | . | . | . | 10.50 | 10.50 |
| | 025-00018-0096 | WIRE 26 WH/BU | | IN | . | . | . | . | . | . | . | . | . | 10.50 | 10.50 |
| | 025-05012-0000 | WIRE 2C SHD WHTBLK | | IN | . | . | . | . | . | . | . | . | . | 9.50 | 9.50 |
| | 030-02229-0011 | RGT ANG HDR 3P | | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 030-02229-0013 | RGT ANG HDR 7P | | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 030-02229-0014 | RGT ANG HDR 6P | | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 047-04811-0001 | COVER XMTR W/F | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 047-08494-0003 | COVER, TOP | A | EA | 1.00 | 1.00 | 1.00 | 1.00 | . | . | . | . | . | . | . |
| | 047-08494-0014 | TOP COVER | A | EA | . | . | . | . | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | . |
| | 047-08495-0002 | COVER, BOTTOM | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 047-08512-0004 | MOUNTING RACK | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 057-02203-1010 | S/N TAG FLVR BLK | | EA | 1.00 | . | . | . | . | . | . | . | . | . | . |
| | 057-02203-1011 | S/N TAG FLVR BLK | | EA | . | 1.00 | . | . | . | . | . | . | . | . | . |
| | 057-02203-1030 | S/N TAG FLVR BLK | | EA | . | . | 1.00 | . | . | . | . | . | . | . | . |
| | 057-02203-1031 | S/N TAG FLVR BLK | | EA | . | . | . | 1.00 | . | . | . | . | . | . | . |
| | 057-02203-1050 | S/N TAG FLVR BLK | | EA | . | . | . | . | 1.00 | . | . | . | . | . | . |
| | 057-02203-1051 | S/N TAG FLVR BLK | | EA | . | . | . | . | . | 1.00 | . | . | . | . | . |
| | 057-02203-1060 | S/N TAG FLVR BLK | | EA | . | . | . | . | . | . | 1.00 | . | . | . | . |
| | 057-02203-1061 | S/N TAG FLVR BLK | | EA | . | . | . | . | . | . | . | 1.00 | . | . | . |
| | 057-02203-1070 | S/N TAG FLVR BLK | | EA | . | . | . | . | . | . | . | . | 1.00 | . | . |
| | 057-02312-0001 | DECAL | | EA | . | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | . | . | . |
| | 057-03451-0001 | S/N TAG KY96A | | EA | . | . | . | . | . | . | . | . | 1.00 | 1.00 | . |
| | 064-01052-0099 | COMMOM BOM | A | EA | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | . | . | . |
| | 073-00379-0002 | HOLD DOWN 80 | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 073-00808-0003 | KNOB VOLUME | A | EA | . | . | . | . | . | . | . | . | . | . | 1.00 |
| | 073-00972-0003 | KNOB VOLUME | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | . |
| | 088-00838-0006 | PUSH BUTTON | A | EA | . | . | . | . | . | . | . | . | . | . | 1.00 |
| | 088-00838-0050 | LIGHTING SHAFT | | EA | . | . | . | . | . | . | . | . | . | 1.00 | . |
| | 088-02269-0003 | BEZEL LCD | | EA | . | . | . | . | . | . | . | . | . | . | 1.00 |
| | 088-02270-0000 | PUSH BUTTON, RND | | EA | . | . | . | . | . | . | . | . | . | . | 1.00 |
| | 088-02270-0001 | PUSH BUTTON | | EA | . | . | . | . | . | . | . | . | . | 1.00 | . |
| | 088-02271-0000 | LIGHTING SHAFT | | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 088-03101-0001 | BEZEL | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | . |
| | 088-03130-0001 | TRANSFER BUTTON | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | . |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | | | | | | | |
|--------|----------------|--------------------|-------------------|------|----------|------|------|------|------|------|------|------|------|------|------|
| | | | | | 0010 | 0011 | 0030 | 0031 | 0050 | 0051 | 0060 | 0061 | 0070 | 0099 | |
| | 089-05434-0003 | SCR FHP 3-48X3/16 | EA | . | . | . | . | . | . | . | . | . | . | 9.00 | 9.00 |
| | 089-05434-0004 | SCR FHP 3-48X1/4 | EA | . | . | . | . | . | . | . | . | . | . | 8.00 | 8.00 |
| | 089-05874-0005 | SCR PHP 2-56X5/16 | EA | . | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 089-05901-0004 | SCR PHP 3-48X1/4 | EA | . | . | . | . | . | . | . | . | . | . | 7.00 | 7.00 |
| | 089-05903-0004 | SCR PHP 4-40X1/4 | EA | . | . | . | . | . | . | . | . | . | . | 3.00 | 3.00 |
| | 089-05925-0004 | SCR BHP 3-48X1/4 | EA | . | . | . | . | . | . | . | . | . | . | 5.00 | 5.00 |
| | 089-06004-0003 | SCR FHP 2-56X3/16 | EA | . | . | . | . | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | . |
| | 089-06298-0004 | SCR FHP 2-48X1/4 | EA | . | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 089-06342-0004 | SCR PHP 3-48X1/4 | EA | . | . | . | . | . | . | . | . | . | . | 4.00 | 4.00 |
| | 089-06561-0000 | SCR SHC 6-32X1.140 | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 089-08077-0030 | WASHER | AR | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 089-08231-0000 | WASHER FLAT | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 090-00265-0000 | PIN GRO .046X.250 | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 091-00109-0000 | CABLE TIE .234 | EA | . | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 091-00156-0000 | BUSHING | EA | . | . | . | . | . | . | . | . | . | . | 3.00 | 3.00 |
| | 091-00286-0002 | INSUL XSTR .687 | EA | . | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 150-00049-0010 | TUBING SHRINK WHT | IN | . | . | . | . | . | . | . | . | . | . | 1.25 | 1.25 |
| | 150-00060-0001 | SPIROBAND | IN | . | . | . | . | . | . | . | . | . | . | 5.25 | 5.25 |
| | 150-00072-0004 | SLDR SLEEVE .62 | EA | . | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 150-00103-0000 | SLDR SLEEVE | EA | . | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 155-02031-0027 | JUMPER CABLE 9C | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 155-02031-0030 | JUMPER CABLE 9C | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 200-04271-0000 | 28V MODULATOR ASSY | A EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 200-07475-0000 | LCD PROCESSOR BD | A EA | . | . | . | . | 1.00 | . | . | . | . | . | . | . |
| | 200-07479-0000 | LCD DISPLAY BD | A EA | . | . | . | . | . | . | . | . | . | . | . | 1.00 |
| | 200-07479-0001 | LCD DISPLAY BD | A EA | . | . | . | . | . | . | . | . | . | . | 1.00 | . |
| | 200-07540-0001 | KY 96A 28V 5W TX B | A EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 200-07797-0000 | AUDIO AMP BOARD | A EA | . | . | . | . | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | . |
| | 200-07799-0001 | 96A MAIN BD 25KHZ | A EA | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | . |
| | 200-07799-0003 | 96A MAIN BD 50KHZ | A EA | . | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | . | . |
| | 206-00021-0000 | UNITHW/SWSET135975 | A EA | 1.00 | 1.00 | . | . | 1.00 | 1.00 | . | . | . | . | . | . |
| | 206-00022-0000 | UNITHW/SWSET136975 | A EA | . | . | 1.00 | 1.00 | . | . | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | . |
| I | 108 | 120-03026-0000 | IC MC7B05CT | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| Q | 113 | 007-00930-0000 | XSTR S PNPME15029 | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| Q | 122 | 007-00930-0000 | XSTR S PNPME15029 | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| REF | 1 | 300-04268-0000 | FINAL ASSY KY96A | RF | . | . | . | . | . | . | . | . | . | X. | X. |
| REF | 100 | 000-00601-0002 | FLOW CHT KY96A | A RF | . | . | . | . | . | . | . | . | . | X. | X. |



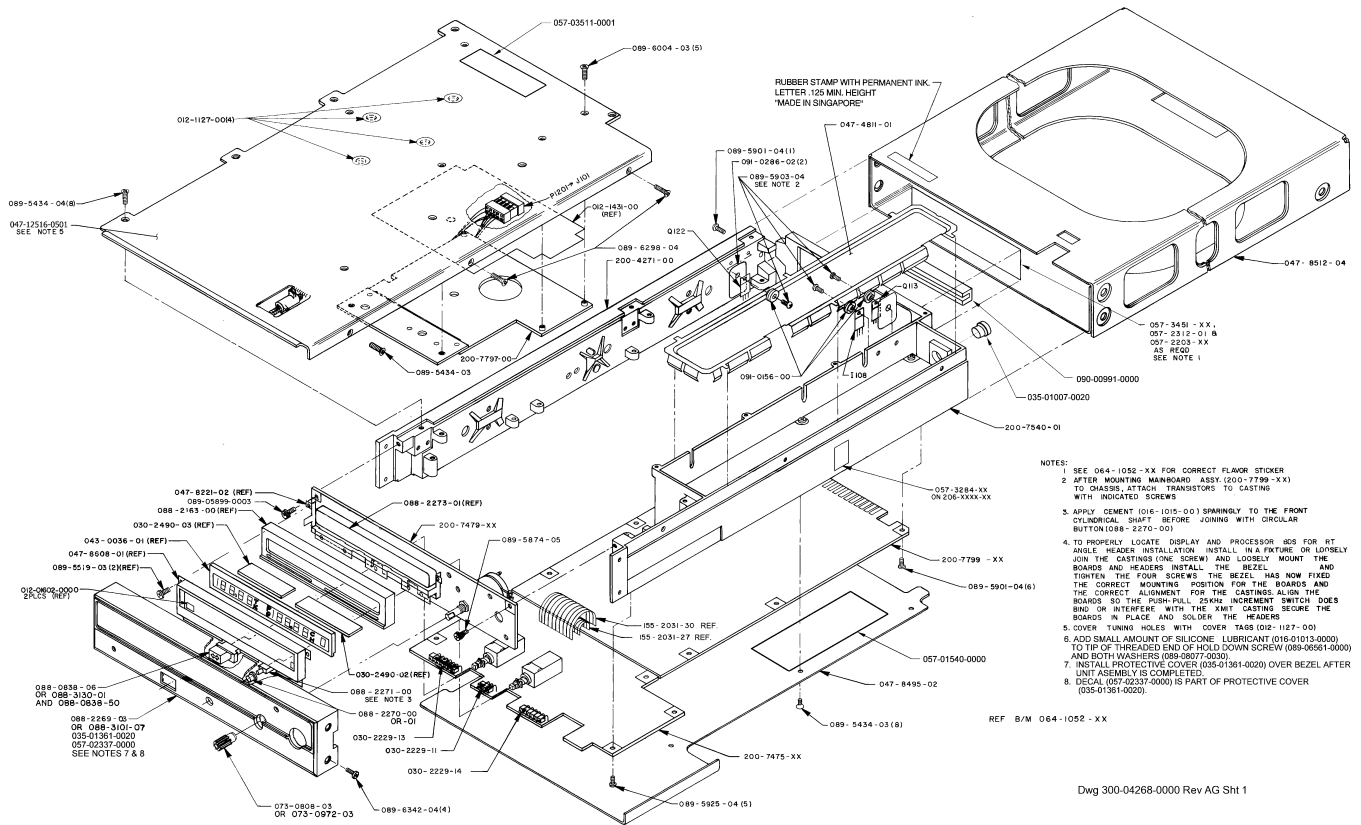


FIGURE 6-1 KY 96A Final Assembly (Sht 1 of 2)
(Dwg No 300-04268-0000, Rev AG, Sht 1)

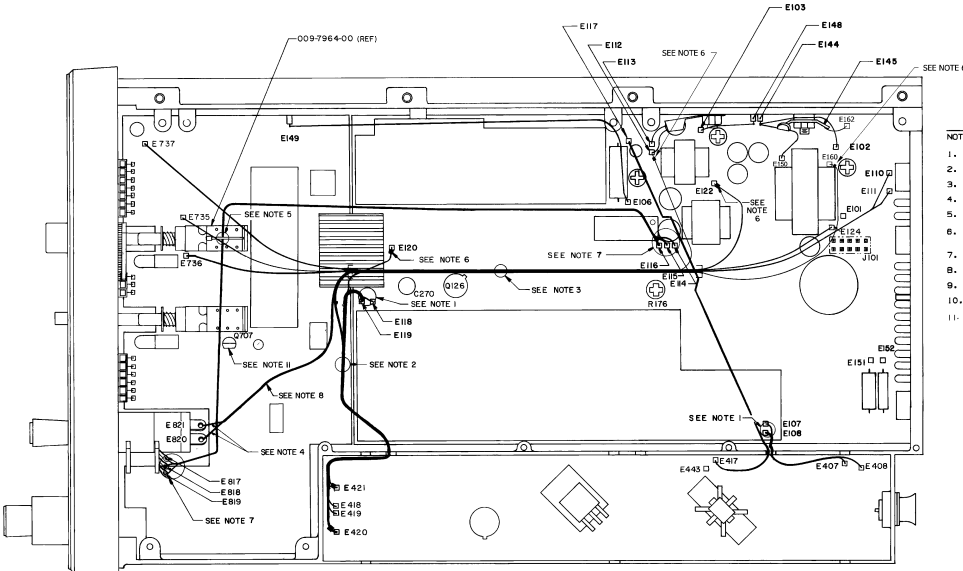

- NOTES
1. INSTALL SOLDER SLEEVE (150-0103-00) IN THIS LOCATION. SEE DETAIL A.
 2. INSTALL CABLE TIE (009-0100-00) IN THIS LOCATION.
 3. INSTALL SPIROBAND TUBING (150-0060-01) TO WIRE BUNDLE.
 4. NOTE BELLETED.
 5. COVER TOP OF CABLE TIE BOARD (009-7964-00) WITH MILAR TAPE (009-0001-00) AND SECURE TO PREVENT MOVEMENT WITH A CABLE TIE (009-0100-00).
 6. INSTALL FERROELECTRIC BEAD (Q13-0006-01) IN THIS LOCATION. SECURE BEAD TO BOARD WITH RTV (Q16-1071-00) TO PREVENT MOVEMENT.
 7. INSTALL SOLDER SLEEVE (150-0072-04) IN THIS LOCATION. SEE DETAIL B.
 8. TWIST THESE LEADS TOGETHER AT ONE END ONE HALF TURN PER INCH.
 9. THESE LEADS ARE PART OF 200-7540-01 TRANSMITTER ASSY.
 10. THESE LEADS ARE PART OF 200-4271-00 MODULATOR ASSY.
 11. Q707 SHOULD BE BENT DOWN TO CLEAR VOLUME CONTROL WIRE.




WIRE CHART

| FROM | TO | DESCRIPTION | KPN | LENGTH | SEE NOTE | TOL |
|------|------|-----------------------|-------------|---------|----------|------|
| E160 | E820 | 18 AWG RED | 025-0005-02 | 11.25" | | |
| E117 | E821 | 18 AWG RED/WH | 025-0005-12 | 9.00" | | ± 5% |
| E112 | E137 | 26 AWG RED/VEL | 025-0018-01 | 11.400" | | |
| E114 | E817 | BLACK | 025-0012-00 | 8.50" | | |
| E115 | E818 | WH/BLK | 025-0018-02 | 8.50" | 7 | |
| E117 | E736 | 26 AWG WH/BLU | 025-0018-06 | 10.800" | | |
| E111 | E734 | 26 AWG WH/RED | 025-0018-02 | 10.500" | | |
| E102 | E144 | 20 AWG TINNED COPPER | 025-0004-00 | 2.12" | 10 | |
| E103 | E145 | 20 AWG TINNED COPPER | 025-0004-00 | 0.75" | 10 | |
| E103 | E148 | 20 AWG TINNED COPPER | 025-0004-00 | 1.25" | 10 | |
| E108 | E149 | 20 AWG TINNED COPPER | 025-0004-00 | 6.000" | 10 | |
| E120 | E420 | 26 AWG GRV/WH | 025-0018-09 | 0.500" | 9 | |
| E452 | E122 | 40 AWG GRN | 025-0004-03 | 10.000" | 9 | |
| E117 | E417 | 18 AWG RED | 025-0005-02 | 6.000" | 9 | |
| E445 | E407 | COAX CABLE RG 178 B/U | 026-0013-00 | 2.25" | 9 | MAX |
| E107 | E408 | COAX CABLE RG 178 B/U | 026-0013-00 | 4.75" | 9 | MAX |
| E118 | E418 | COAX CABLE RG 178 B/U | 026-0013-00 | 4.75" | 9 | MAX |
| E118 | E419 | SHIELD | | | | |

Dwg 300-04268-0000 Rev AG Sht 2


FIGURE 6-1 KY 96A Final Assembly (Sht 2 of 2) (Dwg No 300-04268-0000, Rev AG, Sht 2)

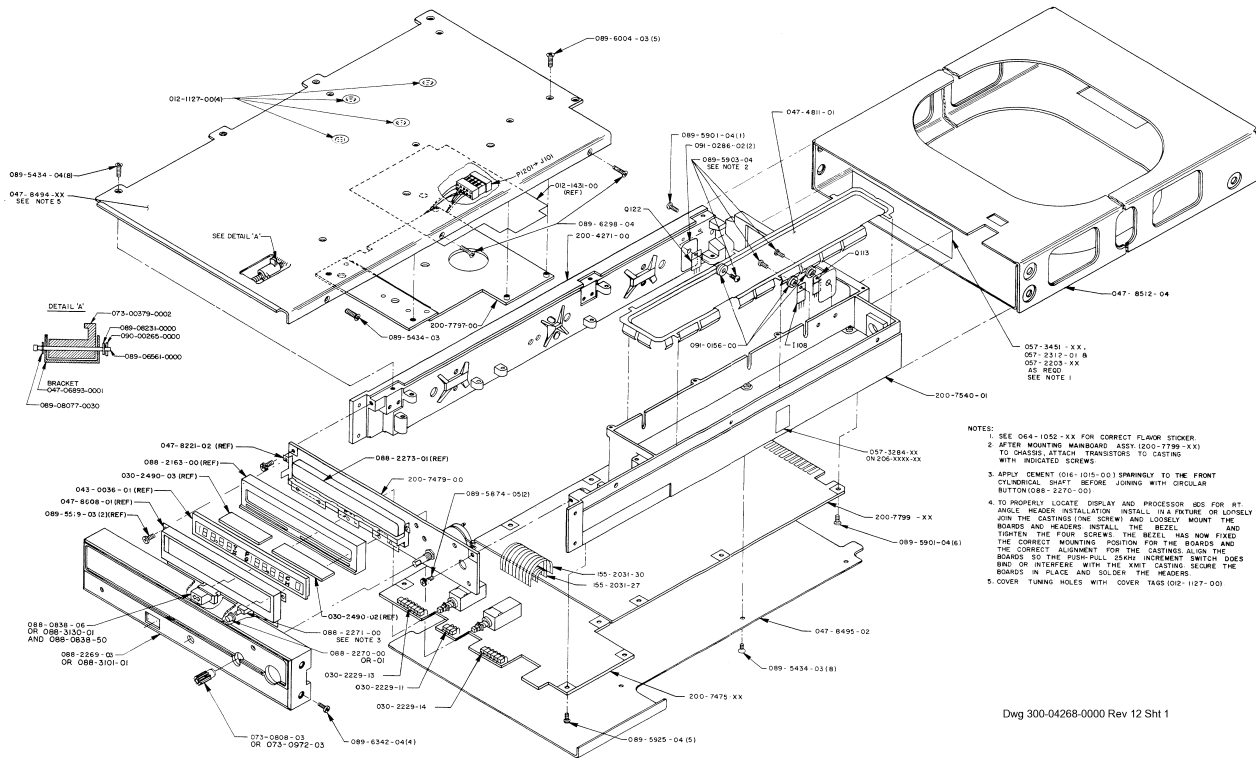


- NOTES:
1. SEE 064-1052-XX FOR CORRECT FLAVOR STICKER.
 2. AFTER MOUNTING MAINBOARD, ADD 1000-7789-XX (3) TO CHASSIS ATTACH TRANSISTORS TO CASTING WITH INDICATED SCREWS.
 3. APPLY CEMENT (016-1015-00) SPARINGLY TO THE FRONT CYLINDRICAL SHAFT BEFORE JOINING WITH CIRCULAR BUTTON (088-2270-00).
 4. TO PROPERLY LOCATE DISPLAY AND PROCESSOR (05) FOR RT-ANGLE HEADERS, INSTALL IN A FUTURE OR LOOSELY JOIN THE CASTINGS (1) ONE SCREW AND LOOSELY MOUNT THE BOARD AND HEADERS. INSTALL THE BEZEL AND TIGHTEN THE FOUR SCREWS. THE BEZEL HAS NOW FIXED THE CORRECT MOUNTING POSITION FOR THE BOARD AND THE CORRECT ALIGNMENT FOR THE CASTINGS. ALIGN THE BOARD TO THE FISH-TAIL SCREW. INCREMENT SWITCH DOES NOT INTERFERE WITH THE XMT CASTING. SECURE THE BOARD IN PLACE AND SOLDER THE HEADERS.
 5. COVER TUNING HOLES WITH COVER TAGS (012-1127-00).

Dwg 300-04268-0000 Rev 12 Sht 1

FIGURE 6-1A KY 96A Final Assembly (Sht 1 of 2)
(Dwg No 300-04268-0000, Rev 12, Sht 1)

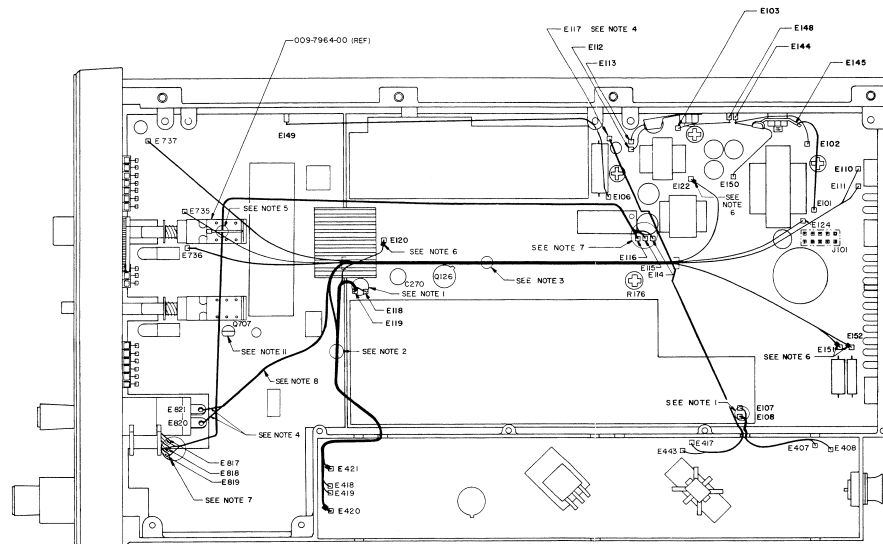

- NOTES
1. INSTALL SOLDER SLEEVE (150-0103-00) IN THIS LOCATION. SEE DETAIL A.
 2. INSTALL CABLE TIE (091-0109-00) IN THIS LOCATION.
 3. INSTALL SPIRIBAND TUBING (150-0060-01) TO WIRE BUNDLE.
 4. INSTALL SPIRIBAND TUBING (150-0049-10) IN THIS LOCATION.
 5. THIS LOCATION IS RESERVED FOR USE WITH THE 200-0271-00 TRANSMITTER ASSEMBLY TO PREVENT MOVEMENT WITH THE 200-0271-00 TRANSMITTER ASSEMBLY.
 6. INSTALL FERRITE BEAD (013-0006-01) IN THIS LOCATION. SECURE BEAD TO BOARD WITH RTV (016-1071-00) TO PREVENT MOVEMENT.
 7. INSTALL SOLDER SLEEVE (150-0072-04) IN THIS LOCATION. SEE DETAIL B.
 8. TWIST THESE LEADS TOGETHER AT ONE AND ONE HALF TURNS PER INCH.
 9. THESE LEADS ARE APART OF 200-7540-01 TRANSMITTER ASSEMBLY.
 10. THESE LEADS ARE APART OF 200-4271-00 MODULATOR ASSEMBLY.
 11. Q707 SHOULD BE BENT DOWN TO CLEAR VOLUME CONTROL WIRE.




WIRE CHART

| FROM | TO | DESCRIPTION | QTY | LENGTH | SEE NOTE | TOL |
|------|------|----------------------|-------------|--------|----------|------|
| E101 | E820 | 18 AWG RED | 025-0005-02 | 11.25" | | |
| E102 | E811 | 18 AWG RED/WHI | 025-0005-12 | 11.25" | | ± 5% |
| E104 | E737 | 26 AWG RED/WHI | 025-0018-24 | 11.00" | | |
| E114 | E817 | BLACK | 025-5012-00 | 9.50" | | |
| E115 | E818 | WHI | 025-5013-00 | 10.50" | 7 | |
| E119 | E819 | SHIELD (RED) | 025-5018-06 | 10.50" | | |
| E121 | E738 | 18 AWG WHI/RED | 025-0018-06 | 10.50" | | |
| E100 | E424 | 20 AWG TINNED COPPER | 025-0004-00 | 10.25" | 10 | |
| E101 | E48 | 20 AWG TINNED COPPER | 025-0004-00 | 2.00" | 10 | |
| E103 | E48 | 20 AWG TINNED COPPER | 025-0004-00 | 1.25" | 10 | |
| E106 | E49 | 20 AWG TINNED COPPER | 025-0004-00 | 6.00" | 10 | |
| E107 | E420 | 26 AWG GRAY/WHI | 025-0018-09 | 8.00" | 8 | |
| E107 | E421 | 26 AWG GRAY/WHI | 025-0018-09 | 8.00" | 8 | |
| E117 | E417 | SHIELD | 025-5003-09 | 6.250" | 9 | MAX |
| E107 | E408 | CABLE RG 178 5/U | 026-0013-00 | 2.25" | 9 | MAX |
| E108 | E408 | SHIELD | 026-0013-00 | 2.25" | 9 | MAX |
| E109 | E408 | CABLE RG 178 5/U | 026-0013-00 | 4.75" | 9 | MAX |
| E118 | E418 | SHIELD | 026-0013-00 | 4.75" | 9 | MAX |
| E119 | E418 | SHIELD | 026-0013-00 | 4.75" | 9 | MAX |

Dwg 300-04268-0000 Rev 12 Sht 2


FIGURE 6-1A KY 96A Final Assembly (Sht 2 of 2)
(Dwg No 300-04268-0000, Rev 12, Sht 2)

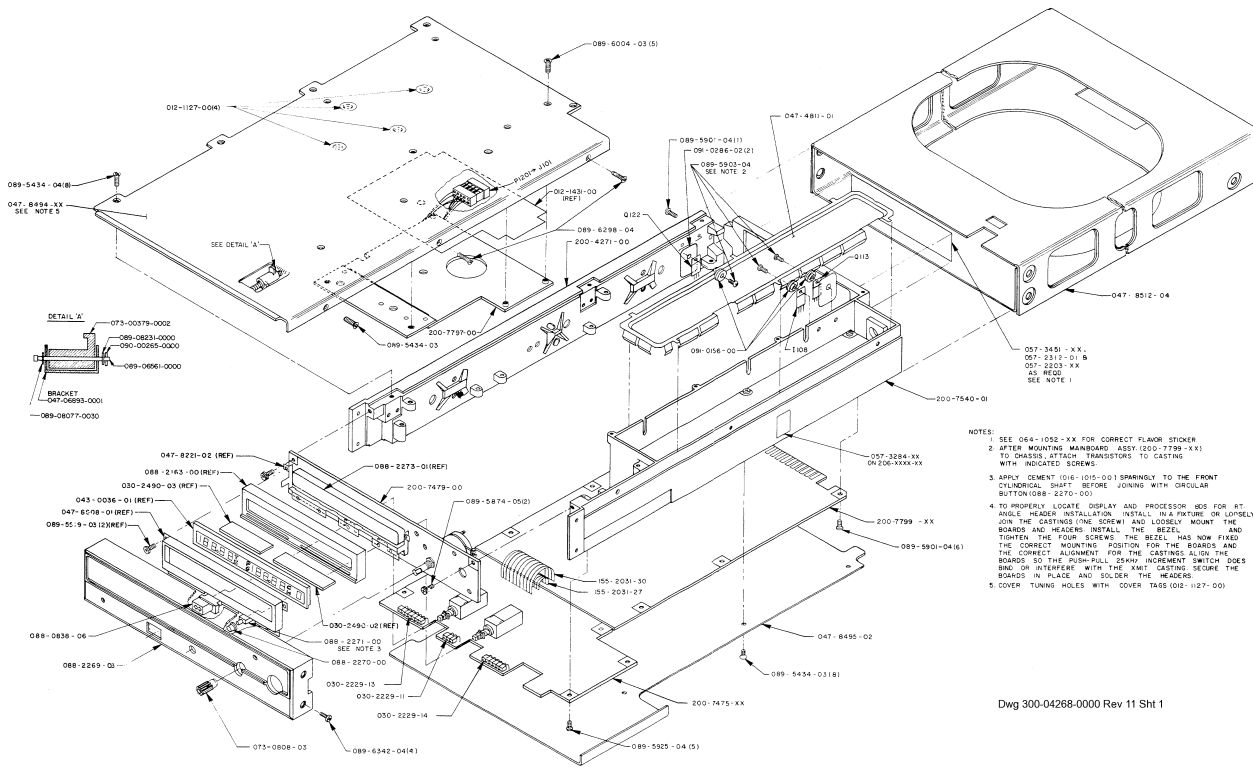


- NOTES:
- 1 SEE 064-1052-XX FOR CORRECT FLAVOR STICKER
 - 2 AFTER MOUNTING MAINBOARD ASSY (200-7799-XX) TO CHASSIS, ATTACH TRANSISTORS TO CASTING WITH INDICATED SCREWS.
 - 3 APPLY GEMENT (016-1015-01) SPRAYING TO THE FRONT CYLINDRICAL SHAFT BEFORE JOINING WITH CIRCULAR BUTTON (088-2270-00)
 - 4 TO PROPERLY LOCATE DISPLAY AND PROCESSOR KEYS FOR AT ANGLE HEADER INSTALLATION, INSTALL IN A PICTURE OR LOOSELY JOIN THE CASTINGS (ONE SCREW) AND LOOSELY MOUNT THE BOARDS AND HEADERS. INSTALL THE BEZEL AND TIGHTEN THE FOUR SCREWS. THE BEZEL HAS NOW FIXED THE CORRECT MOUNTING POSITION FOR THE BOARDS AND THE CORRECT ALIGNMENT FOR THE CASTINGS. ALLOW THE BOARDS TO THE PUSH-PULL DOWN INCREMENT SWITCH DOES BRAG ON INTERFERE WITH THE KEYS. SECURE THE BOARDS IN PLACE AND SOLDER THE HEADERS.
 - 5 COVER TUNING HOLES WITH COVER TABS (012-1127-00)

Dwg 300-04268-0000 Rev 11 Sht 1

FIGURE 6-1B KY 96A Final Assembly (Sht 1 of 2)
(Dwg No 300-04268-0000, Rev 11, Sht 1)

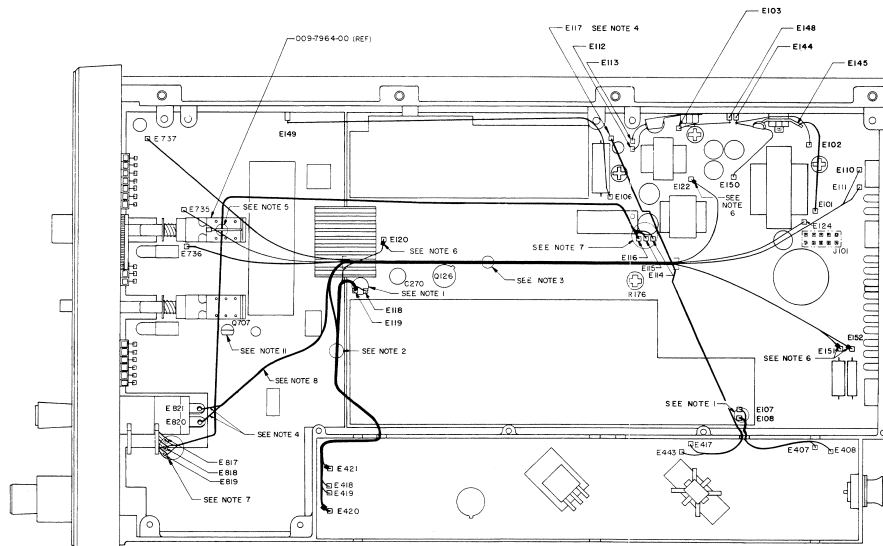

- NOTES
1. INSTALL SOLDER SLEEVE (150-0103-00) IN THIS LOCATION. SEE DETAIL A.
 2. INSTALL CABLE TIE (091-0109-00) IN THIS LOCATION.
 3. INSTALL SPIROBAND TUBING (150-0060-01) TO WIRE BUNDLES.
 4. INSTALL SPIROBAND TUBING (150-0049-101) IN THIS LOCATION.
 5. THIS LOCATION IS TO BE BUNDLED WITH MULTITAPE (200-0201-00) AND BUNDLES TO PREVENT MOVEMENT WITH CABLE TIE.
 6. INSTALL FERRITE BEAD (013-0006-01) IN THIS LOCATION. SET WIRE BEAD TO BEARS WITH WTW (018-1077-00) TO PREVENT MOVEMENT.
 7. INSTALL SOLDER SLEEVE (150-0103-00) IN THIS LOCATION. SEE DETAIL B.
 8. TWIST THESE LEADS TOGETHER AT ONE AND ONE HALF TURNS PER INCH.
 9. THESE LEADS ARE APART OF 200-7540-01 TRANSMITTER ASSY.
 10. THESE LEADS ARE APART OF 200-4271-00 MODULATOR ASSY.
 11. Q707 SHOULD BE BENT DOWN TO CLEAR VOLUME CONTROL WIRE.




WIRE CHART


| FROM | TO | DESCRIPTION | KPH | LENGTH | SEE NOTE | TOL |
|------|------|-----------------------|-------------|--------|----------|------|
| E151 | E620 | 19 AWG RED | 025-0005-02 | 11.25" | | |
| E152 | E621 | 19 AWG RED/WHI | 025-0005-12 | 11.25" | | ± 5% |
| E154 | E127 | 26 AWG RED/YEL | 025-0018-24 | 14.00" | | |
| E114 | E107 | CLACK | 025-5012-00 | 9.50" | | |
| E115 | E118 | WHI | 025-0018-25 | 12.00" | 7 | |
| E116 | E119 | 26 AWG WHI/RED | 025-0019-96 | 10.50" | | |
| E117 | E120 | 26 AWG WHI/RED | 025-0018-96 | 10.50" | | |
| E102 | E144 | 20 AWG TINNED COPPER | 025-0004-00 | 4.25" | 10 | |
| E101 | E145 | 20 AWG TINNED COPPER | 025-0004-00 | 4.25" | 10 | |
| E103 | E146 | 20 AWG TINNED COPPER | 025-0004-00 | 4.25" | 10 | |
| E106 | E148 | 20 AWG TINNED COPPER | 025-0004-00 | 4.25" | 10 | |
| E120 | E420 | 26 AWG GRN/WHI | 025-0018-99 | 8.50" | 9 | |
| E122 | E421 | 26 AWG GRN | 025-0004-03 | 4.50" | 9 | |
| E117 | E443 | WHI SLD | 025-5003-99 | 6.50" | 9 | MAX |
| E109 | E409 | SHIELD | 025-0013-00 | 2.25" | 9 | MAX |
| E108 | E408 | SHIELD | 025-0013-00 | 2.25" | 9 | MAX |
| E119 | E419 | COAX CABLE RG 176 B/G | 025-0013-00 | 4.75" | 9 | MAX |
| E118 | E418 | SHIELD | | | | |

Dwg 300-04268-0000 Rev 11 Sht 2

FIGURE 6-1B KY 96A Final Assembly (Sht 2 of 2)
(Dwg No 300-04268-0000, Rev 11, Sht 2)

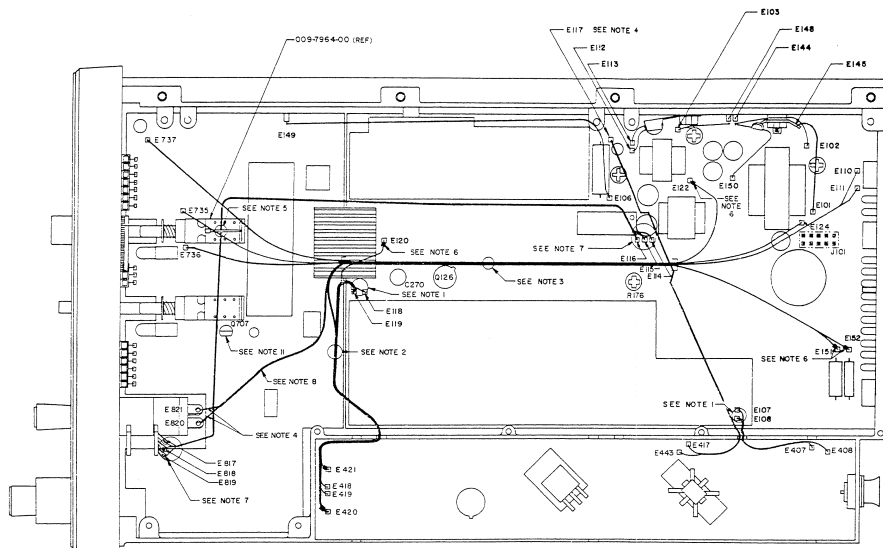

- NOTES
1. INSTALL SOLDER SLEEVE (150-0103-00) IN THIS LOCATION. SEE DETAIL A.
 2. INSTALL CABLE TIE (100-0100-00) IN THIS LOCATION.
 3. INSTALL SPIROBAND TUBING (150-0000-01) TO WIRE BUNDLE.
 4. INSTALL SOLDER TUBING (150-0042-10) IN THIS LOCATION. SEE DETAIL B.
 5. COOPER POSITIVELY IDENTIFY EACH (100-0000-00) WITH UNILAR TARE WITH SOLDER (100-0000-00) TO PREVENT MOVEMENT.
 6. INSTALL FERRITE BEAD (013-0006-01) IN THIS LOCATION. SECURE BEAD TO BOARD WITH RTV (018-1071-00) TO PREVENT MOVEMENT.
 7. INSTALL SOLDER SLEEVE (150-0072-04) IN THIS LOCATION. SEE DETAIL B.
 8. TWIST THESE LEADS TOGETHER AT ONE AND ONE HALF TURNS PER INCH.
 9. THESE LEADS ARE APART OF 200-7540-01 TRANSMITTER ASSEMBLY.
 10. THESE LEADS ARE APART OF 200-4271-00 MODULATOR ASSEMBLY.
 11. Q107 SHOULD BE BENT DOWN TO CLEAR VOLUME CONTROL WIRE.



WIRE CHART

| FROM | TO | DESCRIPTION | KPN | LENGTH | SEE NOTE | TOL |
|------|------|---------------------|-------------|--------|----------|------|
| E151 | E820 | 118 AWG RED | 026-0006-04 | 11.25" | | ± 5% |
| E152 | E821 | 118 AWG RED/WHIT | 026-0006-12 | 11.25" | | |
| E153 | E822 | 118 AWG RED/YEL | 026-0011-24 | 11.00" | | |
| E174 | E877 | BLK | 026-0012-00 | 9.50" | | |
| E118 | E819 | SHIELD (RED) | 026-0018-00 | 9.50" | 7 | |
| E111 | E738 | 75 AWG WH/BLU | 026-0018-06 | 10.50" | | |
| E110 | E722 | 26 AWG WH/RED | 026-0018-06 | 10.50" | | |
| E101 | E148 | 20 AWG TINED COPPER | 026-0004-00 | 2.125" | 10 | |
| E103 | E148 | 20 AWG TINED COPPER | 026-0004-00 | 2.125" | 10 | |
| E109 | E48 | 20 AWG TINED COPPER | 026-0004-00 | 1.125" | 10 | |
| E150 | E420 | 26 AWG GRV/WH | 026-0018-09 | 2.125" | 9 | |
| E452 | E12 | 20 AWG GRV/WH | 026-0018-09 | 1.125" | 9 | |
| E119 | E417 | WH | 026-0003-09 | 6.125" | 9 | MAX |
| E107 | E407 | SHIELD | 026-0013-00 | 2.25" | 9 | MAX |
| E109 | E407 | SHIELD | 026-0013-00 | 2.25" | 9 | MAX |
| E108 | E407 | SHIELD | 026-0013-00 | 2.25" | 9 | MAX |
| E118 | E418 | SHIELD | 026-0013-00 | 4.75" | 9 | MAX |
| E119 | E419 | SHIELD | 026-0013-00 | 4.75" | 9 | MAX |

Dwg 300-04268-0000 Rev 8 Sht 2

FIGURE 6-1C KY 96A Final Assembly (Sht 2 of 2)
(Dwg No 300-04268-0000, Rev 8, Sht 2)

6.4.2 KY 97A VHF Communication Transceiver

064-01051-0010 97A 25 KHZ SEL REV AB
 064-01051-0011 97A 50 KHZ SEL REV AB
 064-01051-0030 97A 25K SEL 136975 REV AB
 064-01051-0099 COMMON BOM REV AD

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0010 | -0011 | -0030 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | . | . | 1.00 |
| Q113 | 007-00930-0000 | | XSTR S PNPME15029 | EA | . | . | . | 1.00 |
| Q125 | 007-00525-0000 | | XSTR PWR MJE15028 | EA | . | . | . | 1.00 |
| REF1 | 300-04268-0001 | | KY97A COMM TRANSC | RF | . | . | . | .00 |
| REF100 | 000-00601-0003 | | PRODUCT STRUCTURE | RF | . | . | . | .00 |
| | 012-01005-0002 | | TAPE MYLAR .500 W | IN | . | . | . | .50 |
| | 012-01127-0000 | | TAG COVER | EA | . | . | . | 4.00 |
| | 013-00006-0001 | | FERR BEAD | EA | . | . | . | 4.00 |
| | 016-01008-0004 | | GLYPTAL 7526 BL | AR | . | . | . | 1.00 |
| | 016-01015-0000 | | IND ADH 3M 4475 | AR | . | . | . | 1.00 |
| | 016-01071-0000 | | DC RTV 3140 | AR | . | . | . | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | . | 11.25 |
| | 025-00005-0012 | | WIRE 18 RD/WH | IN | . | . | . | 9.00 |
| | 025-00018-0022 | | WIRE 26 RED | IN | . | . | . | 2.00 |
| | 025-00018-0024 | | WIRE 26 RD/YL | IN | . | . | . | 11.00 |
| | 025-00018-0092 | | WIRE 26 WH/RD | IN | . | . | . | 10.50 |
| | 025-00018-0096 | | WIRE 26 WH/BU | IN | . | . | . | 10.50 |
| | 025-05012-0000 | | WIRE 2C SHD WHTBLK | IN | . | . | . | 9.50 |
| | 030-02229-0011 | | RGT ANG HDR 3P | EA | . | . | . | 1.00 |
| | 030-02229-0013 | | RGT ANG HDR 7P | EA | . | . | . | 1.00 |
| | 030-02229-0014 | | RGT ANG HDR 6P | EA | . | . | . | 1.00 |
| | 035-01007-0020 | | CONN CVR NAS820-8 | EA | . | . | . | 1.00 |
| | 035-01361-0020 | | PROTECTIVE COVER | EA | . | . | . | 1.00 |
| | 047-04811-0001 | | COVER XMTR W/F | EA | . | . | . | 1.00 |
| | 047-08494-0501 | | TOP COVER ASSEMBLY | EA | 1.00 | 1.00 | 1.00 | . |
| | 047-08495-0002 | | COVER, BOTTOM | EA | . | . | . | 1.00 |
| | 047-08512-0004 | | MOUNTING RACK | EA | . | . | . | 1.00 |
| | 057-01540-0000 | | WARNING HV TAG | EA | . | . | . | 1.00 |
| | 057-02203-1010 | | S/N TAG FLVR BLK | EA | 1.00 | . | . | . |
| | 057-02203-1011 | | S/N TAG FLVR BLK | EA | . | 1.00 | . | . |
| | 057-02203-1030 | | S/N TAG FLVR BLK | EA | . | . | 1.00 | . |
| | 057-02312-0001 | | DECAL | EA | . | 1.00 | . | . |
| | 057-02337-0000 | | PRTCTV CVR DECAL | EA | . | . | . | 1.00 |
| | 057-03452-0001 | | S/N TAG KY97A | EA | . | . | . | 1.00 |
| | 057-03511-0001 | | DECAL, CAUTION | EA | . | . | . | 1.00 |
| | 064-01051-0099 | | COMMON BOM | EA | 1.00 | 1.00 | 1.00 | . |
| | 073-00808-0003 | | KNOB VOLUME | EA | . | . | . | 1.00 |
| | 088-00838-0006 | | PUSH BUTTON | EA | . | . | . | 1.00 |
| | 088-02269-0005 | | BEZEL LCD | EA | . | . | . | 1.00 |
| | 088-02270-0000 | | PUSH BUTTON, RND | EA | . | . | . | 1.00 |
| | 088-02271-0000 | | LIGHTING SHAFT | EA | . | . | . | 1.00 |
| | 089-05434-0003 | | SCR FHP 3-48X3/16 | EA | . | . | . | 9.00 |
| | 089-05434-0004 | | SCR FHP 3-48X1/4 | EA | . | . | . | 8.00 |
| | 089-05874-0005 | | SCR PHP 2-56X5/16 | EA | . | . | . | 1.00 |
| | 089-05899-0003 | | SCR PHP 2-56X3/16 | EA | . | . | . | 1.00 |
| | 089-05901-0004 | | SCR PHP 3-48X1/4 | EA | . | . | . | 7.00 |
| | 089-05903-0004 | | SCR PHP 4-40X1/4 | EA | . | . | . | 3.00 |
| | 089-05925-0004 | | SCR BHP 3-48X1/4 | EA | . | . | . | 5.00 |
| | 089-06298-0004 | | SCR FHP 3-48X1/4 | EA | . | . | . | 2.00 |
| | 089-06342-0004 | | SCR PHP 3-48X1/4 | EA | . | . | . | 4.00 |
| | 090-00991-0000 | | PROTECTIVE CLOSURE | EA | . | . | . | 1.00 |
| | 091-00109-0000 | | CABLE TIE | EA | . | . | . | 2.00 |
| | 091-00156-0000 | | BUSHING | EA | . | . | . | 3.00 |
| | 091-00286-0002 | | INSUL XSTR .687 | EA | . | . | . | 2.00 |
| | 150-00049-0010 | | SHRINK TUBING WHT | IN | . | . | . | 1.25 |
| | 150-00060-0001 | | SPIROBAND | IN | . | . | . | 5.25 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0010 | -0011 | -0030 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| | 150-00072-0004 | | SLDR SLEEVE .62 | EA | . | . | . | 2.00 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | . | 2.00 |
| | 200-04270-0000 | | 14V MODULATOR ASSY | EA | . | . | . | 1.00 |
| | 200-07479-0000 | | LCD DISPLAY BD | EA | . | . | . | 1.00 |
| | 200-07540-0000 | | KY97A 14V 5W TX BD | EA | . | . | . | 1.00 |
| | 200-07799-0020 | | 97A MNBD 25K FUJI | EA | 1.00 | . | 1.00 | . |
| | 200-07799-0022 | | 97A MN BD 50K FUJI | EA | . | 1.00 | . | . |
| | 206-00021-0020 | | TOP SW BOM, KY96A/ | EA | 1.00 | 1.00 | . | . |
| | 206-00022-0020 | | TOP SW BOM, KY96A/ | EA | . | . | 1.00 | . |

064-01051-0031 97A 50K SEL 136975 REV AB
 064-01051-0050 97A 25KHZ W/AUDAMP REV AB
 064-01051-0051 97A 50KHZ W/AUDAMP REV AB
 064-01051-0099 COMMON BOM REV AD

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0031 | -0050 | -0051 | -0099 |
|--------|----------------|---------|---------------------|----|-------|-------|-------|-------|
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | . | . | 1.00 |
| Q113 | 007-00930-0000 | | XSTR S PNP MJE15029 | EA | . | . | . | 1.00 |
| Q125 | 007-00525-0000 | | XSTR PWR MJE15028 | EA | . | . | . | 1.00 |
| REF1 | 300-04268-0001 | | KY97A COMM TRANSC | RF | . | . | . | .00 |
| REF100 | 000-00601-0003 | | PRODUCT STRUCTURE | RF | . | . | . | .00 |
| | 012-01005-0002 | | TAPE MYLAR .500 W | IN | . | . | . | .50 |
| | 012-01127-0000 | | TAG COVER | EA | . | . | . | 4.00 |
| | 013-00006-0001 | | FERR BEAD | EA | . | . | . | 4.00 |
| | 016-01008-0004 | | GLYPTAL 7526 BL | AR | . | . | . | 1.00 |
| | 016-01015-0000 | | IND ADH 3M 4475 | AR | . | . | . | 1.00 |
| | 016-01071-0000 | | DC RTV 3140 | AR | . | . | . | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | . | 11.25 |
| | 025-00005-0012 | | WIRE 18 RD/WH | IN | . | . | . | 9.00 |
| | 025-00018-0022 | | WIRE 26 RED | IN | . | . | . | 2.00 |
| | 025-00018-0024 | | WIRE 26 RD/YL | IN | . | . | . | 11.00 |
| | 025-00018-0092 | | WIRE 26 WH/RD | IN | . | . | . | 10.50 |
| | 025-00018-0096 | | WIRE 26 WH/BU | IN | . | . | . | 10.50 |
| | 025-05012-0000 | | WIRE 2C SHD WHTBLK | IN | . | . | . | 9.50 |
| | 030-02229-0011 | | RGT ANG HDR 3P | EA | . | . | . | 1.00 |
| | 030-02229-0013 | | RGT ANG HDR 7P | EA | . | . | . | 1.00 |
| | 030-02229-0014 | | RGT ANG HDR 6P | EA | . | . | . | 1.00 |
| | 035-01007-0020 | | CONN CVR NAS820-8 | EA | . | . | . | 1.00 |
| | 035-01361-0020 | | PROTECTIVE COVER | EA | . | . | . | 1.00 |
| | 047-04811-0001 | | COVER XMTR W/F | EA | . | . | . | 1.00 |
| | 047-08494-0501 | | TOP COVER ASSEMBLY | EA | 1.00 | . | . | . |
| | 047-08495-0002 | | COVER, BOTTOM | EA | . | . | . | 1.00 |
| | 047-08512-0004 | | MOUNTING RACK | EA | . | . | . | 1.00 |
| | 047-12516-0501 | | TOP COVER ASSY | EA | . | 1.00 | 1.00 | . |
| | 057-01540-0000 | | WARNING HV TAG | EA | . | . | . | 1.00 |
| | 057-02203-1031 | | S/N TAG FLVR BLK | EA | 1.00 | . | . | . |
| | 057-02203-1050 | | S/N TAG FLVR BLK | EA | . | 1.00 | . | . |
| | 057-02203-1051 | | S/N TAG FLVR BLK | EA | . | . | 1.00 | . |
| | 057-02312-0001 | | DECAL | EA | 1.00 | . | 1.00 | . |
| | 057-02337-0000 | | PRTCTV CVR DECAL | EA | . | . | . | 1.00 |
| | 057-03452-0001 | | S/N TAG KY97A | EA | . | . | . | 1.00 |
| | 057-03511-0001 | | DECAL, CAUTION | EA | . | . | . | 1.00 |
| | 064-01051-0099 | | COMMON BOM | EA | 1.00 | 1.00 | 1.00 | . |
| | 073-00808-0003 | | KNOB VOLUME | EA | . | . | . | 1.00 |
| | 088-00838-0006 | | PUSH BUTTON | EA | . | . | . | 1.00 |
| | 088-02269-0005 | | BEZEL LCD | EA | . | . | . | 1.00 |
| | 088-02270-0000 | | PUSH BUTTON, RND | EA | . | . | . | 1.00 |
| | 088-02271-0000 | | LIGHTING SHAFT | EA | . | . | . | 1.00 |
| | 089-05434-0003 | | SCR FHP 3-48X3/16 | EA | . | . | . | 9.00 |
| | 089-05434-0004 | | SCR FHP 3-48X1/4 | EA | . | . | . | 8.00 |
| | 089-05874-0005 | | SCR PHP 2-56X5/16 | EA | . | . | . | 1.00 |
| | 089-05899-0003 | | SCR PHP 2-56X3/16 | EA | . | . | . | 1.00 |
| | 089-05901-0004 | | SCR PHP 3-48X1/4 | EA | . | . | . | 7.00 |
| | 089-05903-0004 | | SCR PHP 4-40X1/4 | EA | . | . | . | 3.00 |
| | 089-05925-0004 | | SCR BHP 3-48X1/4 | EA | . | . | . | 5.00 |
| | 089-06004-0003 | | SCR FHP 2-56X3/16 | EA | . | 5.00 | 5.00 | . |
| | 089-06298-0004 | | SCR FHP 3-48X1/4 | EA | . | . | . | 2.00 |
| | 089-06342-0004 | | SCR PHP 3-48X1/4 | EA | . | . | . | 4.00 |
| | 090-00991-0000 | | PROTECTIVE CLOSURE | EA | . | . | . | 1.00 |
| | 091-00109-0000 | | CABLE TIE | EA | . | . | . | 2.00 |
| | 091-00156-0000 | | BUSHING | EA | . | . | . | 3.00 |
| | 091-00286-0002 | | INSUL XSTR .687 | EA | . | . | . | 2.00 |
| | 150-00049-0010 | | SHRINK TUBING WHT | IN | . | . | . | 1.25 |
| | 150-00060-0001 | | SPIROBAND | IN | . | . | . | 5.25 |
| | 150-00072-0004 | | SLDR SLEEVE .62 | EA | . | . | . | 2.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0031 | -0050 | -0051 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | . | 2.00 |
| | 200-04270-0000 | | 14V MODULATOR ASSY | EA | . | . | . | 1.00 |
| | 200-07479-0000 | | LCD DISPLAY BD | EA | . | . | . | 1.00 |
| | 200-07540-0000 | | KY97A 14V 5W TX BD | EA | . | . | . | 1.00 |
| | 200-07797-0000 | | AUDIO AMP BOARD | EA | . | 1.00 | 1.00 | . |
| | 200-07799-0020 | | 97A MNBD 25K FUJI | EA | . | 1.00 | . | . |
| | 200-07799-0022 | | 97A MN BD 50K FUJI | EA | 1.00 | . | 1.00 | . |
| | 206-00021-0020 | | TOP SW BOM, KY96A/ | EA | . | 1.00 | 1.00 | . |
| | 206-00022-0020 | | TOP SW BOM, KY96A/ | EA | 1.00 | . | . | . |

064-01051-0060 97A25KHZ36975W/AMP REV AB
 064-01051-0061 97A50KHZ36975W/AMP REV AB
 064-01051-0070 KY97A FINAL ASSY REV AF
 064-01051-0099 COMMON BOM REV AD

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0060 | -0061 | -0070 | -0099 |
|--------|----------------|---------|----------------------|----|-------|-------|-------|-------|
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | . | 1.00 | 1.00 |
| Q113 | 007-00930-0000 | | XSTR S PNP MJ E15029 | EA | . | . | 1.00 | 1.00 |
| Q125 | 007-00525-0000 | | XSTR PWR MJ E15028 | EA | . | . | 1.00 | 1.00 |
| REF1 | 300-04268-0001 | | KY97A COMM TRANSC | RF | . | . | .00 | .00 |
| REF100 | 000-00601-0003 | | PRODUCT STRUCTURE | RF | . | . | .00 | .00 |
| | 012-01005-0002 | | TAPE MYLAR .500 W | IN | . | . | .50 | .50 |
| | 012-01127-0000 | | TAG COVER | EA | . | . | 4.00 | 4.00 |
| | 013-00006-0001 | | FERR BEAD | EA | . | . | 4.00 | 4.00 |
| | 016-01008-0004 | | GLYPTAL 7526 BL | AR | . | . | 1.00 | 1.00 |
| | 016-01015-0000 | | IND ADH 3M 4475 | AR | . | . | 1.00 | 1.00 |
| | 016-01071-0000 | | DC RTV 3140 | AR | . | . | 1.00 | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | 11.25 | 11.25 |
| | 025-00005-0012 | | WIRE 18 RD/WH | IN | . | . | 9.00 | 9.00 |
| | 025-00018-0022 | | WIRE 26 RED | IN | . | . | 2.00 | 2.00 |
| | 025-00018-0024 | | WIRE 26 RD/YL | IN | . | . | 11.00 | 11.00 |
| | 025-00018-0092 | | WIRE 26 WH/RD | IN | . | . | 10.50 | 10.50 |
| | 025-00018-0096 | | WIRE 26 WH/BU | IN | . | . | 10.50 | 10.50 |
| | 025-05012-0000 | | WIRE 2C SHD WHTBLK | IN | . | . | 9.50 | 9.50 |
| | 030-02229-0011 | | RGT ANG HDR 3P | EA | . | . | 1.00 | 1.00 |
| | 030-02229-0013 | | RGT ANG HDR 7P | EA | . | . | 1.00 | 1.00 |
| | 030-02229-0014 | | RGT ANG HDR 6P | EA | . | . | 1.00 | 1.00 |
| | 035-01007-0020 | | CONN CVR NAS820-8 | EA | . | . | 1.00 | 1.00 |
| | 035-01361-0020 | | PROTECTIVE COVER | EA | . | . | 1.00 | 1.00 |
| | 047-04811-0001 | | COVER XMTR W/F | EA | . | . | 1.00 | 1.00 |
| | 047-08495-0002 | | COVER, BOTTOM | EA | . | . | 1.00 | 1.00 |
| | 047-08512-0004 | | MOUNTING RACK | EA | . | . | 1.00 | 1.00 |
| | 047-12516-0501 | | TOP COVER ASSY | EA | 1.00 | 1.00 | 1.00 | . |
| | 057-01540-0000 | | WARNING HV TAG | EA | . | . | 1.00 | 1.00 |
| | 057-02203-1060 | | S/N TAG FLVR BLK | EA | 1.00 | . | . | . |
| | 057-02203-1061 | | S/N TAG FLVR BLK | EA | . | 1.00 | . | . |
| | 057-02203-1070 | | S/N TAG FLVR BLK | EA | . | . | 1.00 | . |
| | 057-02312-0001 | | DECAL | EA | . | 1.00 | . | . |
| | 057-02337-0000 | | PRTCTV CVR DECAL | EA | . | . | 1.00 | 1.00 |
| | 057-03452-0001 | | S/N TAG KY97A | EA | . | . | 1.00 | 1.00 |
| | 057-03511-0001 | | DECAL, CAUTION | EA | . | . | 1.00 | 1.00 |
| | 064-01051-0099 | | COMMON BOM | EA | 1.00 | 1.00 | . | . |
| | 073-00808-0003 | | KNOB VOLUME | EA | . | . | . | 1.00 |
| | 073-00972-0003 | | KNOB VOLUME | EA | . | . | 1.00 | . |
| | 088-00838-0006 | | PUSH BUTTON | EA | . | . | . | 1.00 |
| | 088-00838-0050 | | LIGHTING SHAFT | EA | . | . | 1.00 | . |
| | 088-02269-0005 | | BEZEL LCD | EA | . | . | . | 1.00 |
| | 088-02270-0000 | | PUSH BUTTON, RND | EA | . | . | . | 1.00 |
| | 088-02270-0001 | | PUSH BUTTON | EA | . | . | 1.00 | . |
| | 088-02271-0000 | | LIGHTING SHAFT | EA | . | . | 1.00 | 1.00 |
| | 088-03101-0010 | | BEZEL COMPL KY97A | EA | . | . | 1.00 | . |
| | 088-03130-0001 | | TRANSFER BUTTON | EA | . | . | 1.00 | . |
| | 089-05434-0003 | | SCR FHP 3-48X3/16 | EA | . | . | 9.00 | 9.00 |
| | 089-05434-0004 | | SCR FHP 3-48X1/4 | EA | . | . | 8.00 | 8.00 |
| | 089-05874-0005 | | SCR PHP 2-56X5/16 | EA | . | . | 1.00 | 1.00 |
| | 089-05899-0003 | | SCR PHP 2-56X3/16 | EA | . | . | 1.00 | 1.00 |
| | 089-05901-0004 | | SCR PHP 3-48X1/4 | EA | . | . | 7.00 | 7.00 |
| | 089-05903-0004 | | SCR PHP 4-40X1/4 | EA | . | . | 3.00 | 3.00 |
| | 089-05925-0004 | | SCR BHP 3-48X1/4 | EA | . | . | 5.00 | 5.00 |
| | 089-06004-0003 | | SCR FHP 2-56X3/16 | EA | 5.00 | 5.00 | 5.00 | . |
| | 089-06298-0004 | | SCR FHP 3-48X1/4 | EA | . | . | 2.00 | 2.00 |
| | 089-06342-0004 | | SCR PHP 3-48X1/4 | EA | . | . | 4.00 | 4.00 |
| | 090-00991-0000 | | PROTECTIVE CLOSURE | EA | . | . | 1.00 | 1.00 |
| | 091-00109-0000 | | CABLE TIE | EA | . | . | 2.00 | 2.00 |
| | 091-00156-0000 | | BUSHING | EA | . | . | 3.00 | 3.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0060 | -0061 | -0070 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| | 091-00286-0002 | | INSUL XSTR .687 | EA | . | . | 2.00 | 2.00 |
| | 150-00049-0010 | | SHRINK TUBING WHT | IN | . | . | 1.25 | 1.25 |
| | 150-00060-0001 | | SPIROBAND | IN | . | . | 5.25 | 5.25 |
| | 150-00072-0004 | | SLDR SLEEVE .62 | EA | . | . | 2.00 | 2.00 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | 2.00 | 2.00 |
| | 200-04270-0000 | | 14V MODULATOR ASSY | EA | . | . | 1.00 | 1.00 |
| | 200-07479-0000 | | LCD DISPLAY BD | EA | . | . | . | 1.00 |
| | 200-07479-0001 | | LCD DISPLAY BD | EA | . | . | 1.00 | . |
| | 200-07540-0000 | | KY97A 14V 5W TX BD | EA | . | . | 1.00 | 1.00 |
| | 200-07797-0000 | | AUDIO AMP BOARD | EA | 1.00 | 1.00 | 1.00 | . |
| | 200-07799-0020 | | 97A MNBD 25K FUJI | EA | 1.00 | . | 1.00 | . |
| | 200-07799-0022 | | 97A MN BD 50K FUJI | EA | . | 1.00 | . | . |
| | 206-00022-0020 | | TOP SW BOM, KY96A/ | EA | 1.00 | 1.00 | 1.00 | . |


THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| | | | |
|-------------|--------------------|--------|----------|
| 064-1051-10 | 97A 25 KHZ SEL | REV 4 | KY 0097A |
| 064-1051-11 | 97A 50 KHZ SEL | REV 4 | KY 0097A |
| 064-1051-30 | 97A 25K SEL 136975 | REV 4 | KY 0097A |
| 064-1051-31 | 97A 50K SEL 136975 | REV 4 | KY 0097A |
| 064-1051-50 | 97A 25KHZ W/AUDAMP | REV 6 | KY 0097A |
| 064-1051-51 | 97A 50KHZ W/AUDAMP | REV 6 | KY 0097A |
| 064-1051-60 | 97A25KHZ36975W/AMP | REV 6 | KY 0097A |
| 064-1051-61 | 97A50KHZ36975W/AMP | REV 6 | KY 0097A |
| 064-1051-70 | KY97A CROWN SERIES | REV 2 | KY 0097A |
| 064-1051-99 | COMMON BOM | REV 14 | KY 0097A |

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | | | | | | | | | |
|--------|----------------|--------------------|---|----|----------|------|------|------|------|------|------|------|------|------|-------|-------|--|
| | | | | | 0010 | 0011 | 0030 | 0031 | 0050 | 0051 | 0060 | 0061 | 0070 | 0099 | | | |
| | 012-01005-0002 | TAPE MYLAR .500 W | | IN | . | . | . | . | . | . | . | . | . | . | 0.50 | 0.50 | |
| | 012-01127-0000 | TAG COVER | | EA | . | . | . | . | . | . | . | . | . | . | 4.00 | 4.00 | |
| | 013-00006-0001 | FERR BEAD | | EA | . | . | . | . | . | . | . | . | . | . | 4.00 | 4.00 | |
| | 016-01008-0004 | GLYPTAL 7526 BL | | AR | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 016-01015-0000 | IND ADH 3M 4475 | | AR | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 016-01071-0000 | DC RTV 3140 | | AR | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 025-00005-0002 | WIRE 18 RED | | IN | . | . | . | . | . | . | . | . | . | . | 11.25 | 11.25 | |
| | 025-00005-0012 | WIRE 18 RD/WH | | IN | . | . | . | . | . | . | . | . | . | . | 11.25 | 11.25 | |
| | 025-00018-0022 | WIRE 26 RED | | IN | . | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 | |
| | 025-00018-0024 | WIRE 26 RD/YL | | IN | . | . | . | . | . | . | . | . | . | . | 11.00 | 11.00 | |
| | 025-00018-0092 | WIRE 26 WH/RD | | IN | . | . | . | . | . | . | . | . | . | . | 10.50 | 10.50 | |
| | 025-00018-0096 | WIRE 26 WH/BU | | IN | . | . | . | . | . | . | . | . | . | . | 10.50 | 10.50 | |
| | 025-05012-0000 | WIRE 2C SHD WHTBLK | | IN | . | . | . | . | . | . | . | . | . | . | 9.50 | 9.50 | |
| | 030-02229-0011 | RGT ANG HDR 3P | | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 030-02229-0013 | RGT ANG HDR 7P | | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 030-02229-0014 | RGT ANG HDR 6P | | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 047-04811-0001 | COVER XMTR W/F | A | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 047-08494-0003 | COVER, TOP | A | EA | 1.00 | 1.00 | 1.00 | 1.00 | . | . | . | . | . | . | . | . | |
| | 047-08494-0014 | TOP COVER | A | EA | . | . | . | . | 1.00 | 1.00 | 1.00 | 1.00 | . | . | 1.00 | . | |
| | 047-08495-0002 | COVER, BOTTOM | A | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 047-08512-0004 | MOUNTING RACK | A | EA | . | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | |
| | 057-02203-1010 | S/N TAG FLVR BLK | | EA | 1.00 | . | . | . | . | . | . | . | . | . | . | . | |
| | 057-02203-1011 | S/N TAG FLVR BLK | | EA | . | 1.00 | . | . | . | . | . | . | . | . | . | . | |
| | 057-02203-1030 | S/N TAG FLVR BLK | | EA | . | . | 1.00 | . | . | . | . | . | . | . | . | . | |
| | 057-02203-1031 | S/N TAG FLVR BLK | | EA | . | . | . | 1.00 | . | . | . | . | . | . | . | . | |
| | 057-02203-1050 | S/N TAG FLVR BLK | | EA | . | . | . | . | 1.00 | . | . | . | . | . | . | . | |
| | 057-02203-1051 | S/N TAG FLVR BLK | | EA | . | . | . | . | . | 1.00 | . | . | . | . | . | . | |
| | 057-02203-1060 | S/N TAG FLVR BLK | | EA | . | . | . | . | . | . | 1.00 | . | . | . | . | . | |
| | 057-02203-1061 | S/N TAG FLVR BLK | | EA | . | . | . | . | . | . | . | 1.00 | . | . | . | . | |
| | 057-02203-1070 | S/N TAG FLVR BLK | | EA | . | . | . | . | . | . | . | . | 1.00 | . | . | . | |
| | 057-02312-0001 | DECAL | | EA | . | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | . | . | . | . | |
| | 057-03452-0001 | S/N TAG KY97A | | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | . | |
| | 064-01051-0099 | COMMON BOM | A | EA | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | . | . | . | . | |
| | 073-00379-0002 | HOLD DOWN 80 | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | . | |
| | 073-00808-0003 | KNOB VOLUME | A | EA | . | . | . | . | . | . | . | . | . | . | . | 1.00 | |
| | 073-00972-0003 | KNOB VOLUME | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | . | . | |
| | 088-00838-0006 | PUSH BUTTON | A | EA | . | . | . | . | . | . | . | . | . | . | . | 1.00 | |
| | 088-00838-0050 | LIGHTING SHAFT | | EA | . | . | . | . | . | . | . | . | . | 1.00 | . | . | |
| | 088-02269-0005 | BEZEL LCD | A | EA | . | . | . | . | . | . | . | . | . | . | . | 1.00 | |
| | 088-02270-0000 | PUSH BUTTON, RND | | EA | . | . | . | . | . | . | . | . | . | . | . | 1.00 | |
| | 088-02270-0001 | PUSH BUTTON | | EA | . | . | . | . | . | . | . | . | . | 1.00 | . | . | |
| | 088-02271-0000 | LIGHTING SHAFT | | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 | . | |
| | 088-03101-0003 | BEZEL | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | . | . | |
| | 088-03130-0001 | TRANSFER BUTTON | A | EA | . | . | . | . | . | . | . | . | . | 1.00 | . | . | |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.


| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | | | | | | |
|--------|----------------|--------------------|---------------------|------|----------|------|------|------|------|------|------|------|------|------|
| | | | | | 0010 | 0011 | 0030 | 0031 | 0050 | 0051 | 0060 | 0061 | 0070 | 0099 |
| | 089-05434-0003 | SCR FHP 3-48X3/16 | EA | . | . | . | . | . | . | . | . | . | 9.00 | 9.00 |
| | 089-05434-0004 | SCR FHP 3-48X1/4 | EA | . | . | . | . | . | . | . | . | . | 8.00 | 8.00 |
| | 089-05874-0005 | SCR PHP 2-56X5/16 | EA | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 089-05901-0004 | SCR PHP 3-48X1/4 | EA | . | . | . | . | . | . | . | . | . | 7.00 | 7.00 |
| | 089-05903-0004 | SCR PHP 4-40X1/4 | EA | . | . | . | . | . | . | . | . | . | 3.00 | 3.00 |
| | 089-05925-0004 | SCR BHP 3-48X1/4 | EA | . | . | . | . | . | . | . | . | . | 5.00 | 5.00 |
| | 089-06004-0003 | SCR FHP 2-56X3/16 | EA | . | . | . | . | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | . |
| | 089-06298-0004 | SCR FHP 2-48X1/4 | EA | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 089-06342-0004 | SCR PHP 3-48X1/4 | EA | . | . | . | . | . | . | . | . | . | 4.00 | 4.00 |
| | 089-06561-0000 | SCR SHC 6-32X1.140 | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 089-08077-0030 | WASHER | AR | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 089-08231-0000 | WASHER FLAT | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 090-00265-0000 | PIN GRO .046X.250 | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 091-00109-0000 | CABLE TIE .234 | EA | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 091-00156-0000 | BUSHING | EA | . | . | . | . | . | . | . | . | . | 3.00 | 3.00 |
| | 091-00286-0002 | INSUL XSTR .687 | EA | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 150-00049-0010 | TUBING SHRINK WHT | IN | . | . | . | . | . | . | . | . | . | 1.25 | 1.25 |
| | 150-00060-0001 | SPIROBAND | IN | . | . | . | . | . | . | . | . | . | 5.25 | 5.25 |
| | 150-00072-0004 | SLDR SLEEVE .62 | EA | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 150-00103-0000 | SLDR SLEEVE | EA | . | . | . | . | . | . | . | . | . | 2.00 | 2.00 |
| | 155-02031-0027 | JUMPER CABLE 9C | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 155-02031-0030 | JUMPER CABLE 9C | EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 200-04270-0000 | 14V MODULATOR ASSY | A EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 200-07479-0000 | LCD DISPLAY BD | A EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 200-07540-0000 | KY97A 14V 5W TX BD | A EA | . | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| | 200-07797-0000 | AUDIO AMP BOARD | A EA | . | . | . | . | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | . |
| | 200-07799-0000 | 97A MAIN BD 25KHZ | A EA | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | 1.00 | . |
| | 200-07799-0002 | 97A MAIN BD 50KHZ | A EA | . | 1.00 | . | 1.00 | . | 1.00 | . | 1.00 | 1.00 | . | . |
| | 206-00021-0000 | UNITHW/SWSET135975 | A EA | 1.00 | 1.00 | . | . | 1.00 | 1.00 | . | . | . | . | . |
| | 206-00022-0000 | UNITHW/SWSET136975 | A EA | . | . | 1.00 | 1.00 | . | . | 1.00 | 1.00 | 1.00 | 1.00 | . |
| I | 108 | 120-03026-0000 | IC MC7805CT | EA | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| Q | 113 | 007-00930-0000 | XSTR S PNP MJE15029 | EA | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| Q | 125 | 007-00525-0000 | XSTR PWR MJE15028 | EA | . | . | . | . | . | . | . | . | 1.00 | 1.00 |
| REF | 1 | 300-04268-0001 | FINAL ASSY KY97A | RF | . | . | . | . | . | . | . | . | X. | X. |
| REF | 100 | 000-00601-0003 | FLOW CHT KY97A | A RF | . | . | . | . | . | . | . | . | X. | X. |

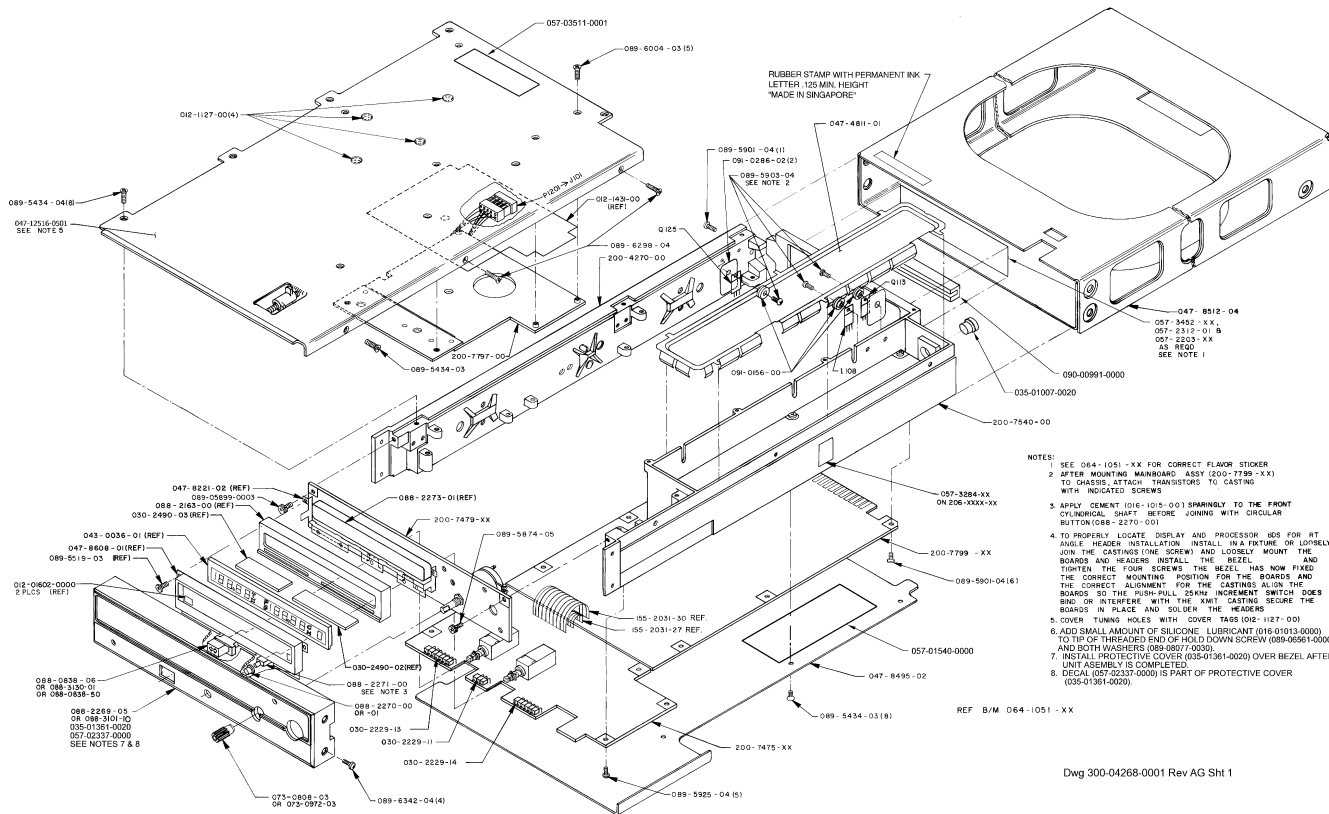

- NOTES:
1. SEE 064-1051-XX FOR CORRECT FLAG STICKER
 2. AFTER MOUNTING MAINBOARD ASSY (200-7799-XX) TO CHASSIS, ATTACH TRANSISTORS TO CASTING WITH INDICATED SCREWS
 3. APPLY CEMENT (016-1015-00) SPARINGLY TO THE FRONT CYLINDRICAL SHAFI BEFORE JOINING WITH CIRCULAR BUTTON (088-2270-00)
 4. TO PROPERLY LOCATE DISPLAY AND PROCESSOR (089-5901-04) AT ANGLE, HEADER INSTALLATION, INSTALL IN A FIXTURE OR LOOSELY JOIN THE CASTINGS (ONE SCREW) AND LOOSELY MOUNT THE BOARDS AND HEADERS. INSTALL THE BEZEL AND TIGHTEN THE FOUR SCREWS. THE BEZEL HAS NOW FIXED THE CORRECT MOUNTING POSITION FOR THE BOARDS AND THE CORRECT ALIGNMENT FOR THE CASTINGS ALONG THE BOARD. SO THE PUSH-PULL 25MM INCREMENT SWITCH DOES NOT BIND OR INTERFERE WITH THE XMT CASTING. SECURE THE BOARDS IN PLACE AND SOLDER THE HEADERS
 5. COVER TUNING HOLES WITH COVER TABS (012-1127-00)
 6. ADD SMALL AMOUNT OF SILICONE LUBRICANT (016-01013-0000) TO TIP OF THREADED END OF HOLD-DOWN SCREW (089-6004-03 (S)) AND BOTH WASHERS (089-0807-0030)
 7. INSTALL PROTECTIVE COVER (035-01361-0020) OVER BEZEL AFTER UNIT ASSEMBLY IS COMPLETED.
 8. DETAIL (057-02337-0000) IS PART OF PROTECTIVE COVER (035-01361-0020).

FIGURE 6-2 KY 97A Final Assembly (Sht 1 of 2)
 (Dwg No 300-04268-0001, Rev AG, Sht 1)

Dwg 300-04268-0001 Rev AG Sht 1

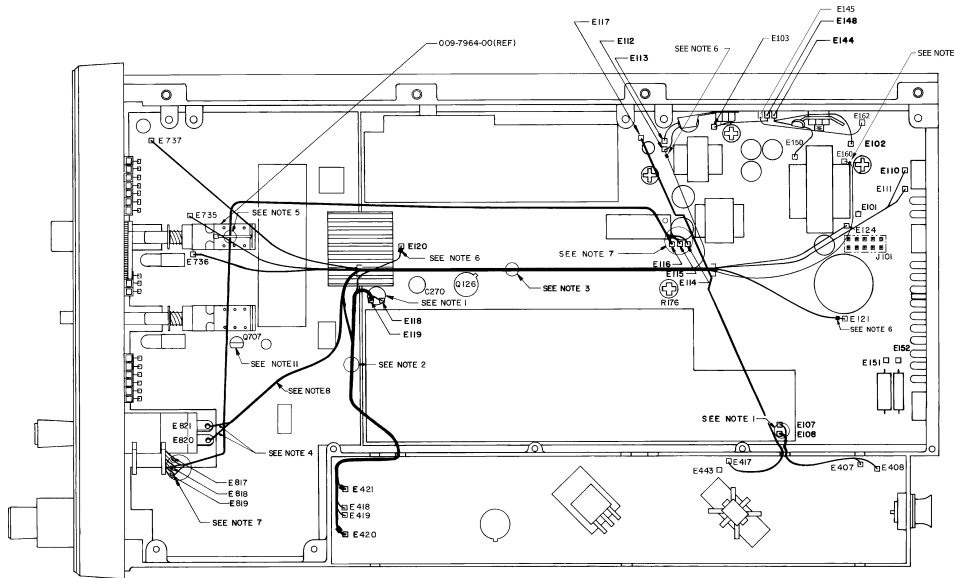

NOTES

1. INSTALL SOLDER SLEEVE (150-0103-00) IN THIS LOCATION. SEE DETAIL A.
2. INSTALL CABLE TIE (009-0109-00) IN THIS LOCATION.
3. INSTALL SPIREBAND TUBING (150-0060-01) TO WIRE BUNDLE.
4. NOTE DELETED.
5. COVER TOP OF CABLE TIE BOARD (009-7964-00) WITH MYLAR TAPE (012-0005-02) AND SECURE COAX TO PREVENT MOVEMENT WITH A CARCITE (001-8109-00).
6. INSTALL FERRITE BEAD (013-0008-01) IN THIS LOCATION. SECURE BEAD TO BOARD WITH RTV (018-1071-00) TO PREVENT MOVEMENT.
7. INSTALL SOLDER SLEEVE (150-0072-04) IN THIS LOCATION. SEE DETAIL B.
8. TWIST THESE LEADS TOGETHER AT ONE AND ONE HALF TURNS PER INCH.
9. THESE LEADS ARE APART OF 200-7540-01 TRANSMITTER ASSY.
10. THESE LEADS ARE APART OF 200-4271-00 MODULATOR ASSY.
11. O707 SHOULD BE BENT DOWN TO CLEAR VOLUME CONTROL WIRE.

WIRE CHART

| FROM | TO | DESCRIPTION | KPN | LENGTH | SEE NOTE | TOL. |
|------|------|-----------------------|-------------|--------|----------|------|
| E150 | E820 | 18 AWG RED | 025-0005-02 | 11.25" | | |
| E117 | E821 | 18 AWG RED/WHT | 025-0005-12 | 9.00" | | +5% |
| E124 | E732 | 28 AWG RED/YEL | 025-0018-24 | 11.00" | | |
| E114 | E817 | BLACK | 025-5012-00 | 9.50" | | |
| E115 | E818 | WHT | 025-5018-02 | 8.50" | | |
| E116 | E819 | SHIELD (RED) | 025-0018-06 | 10.50" | 7 | |
| E111 | E725 | 28 AWG BHT/YEL | 025-5018-02 | 8.50" | | |
| E110 | E732 | 28 AWG BHT/YEL | 025-0018-06 | 10.50" | | |
| E109 | E144 | 20 AWG TINNED COPPER | 025-0004-00 | 1.50" | 10 | |
| E108 | E145 | 20 AWG TINNED COPPER | 025-0004-00 | 1.50" | 10 | |
| E120 | E420 | 28 AWG GRN/WHT | 025-0018-B9 | 3.25" | 9 | |
| E820 | E171 | 20 AWG GRN | 025-0005-02 | 10.50" | 9 | |
| E117 | E417 | 18 AWG RED | 025-0005-02 | 8.50" | 9 | MAX |
| E107 | E407 | COAX CABLE RS 178 B/U | 028-0013-00 | 2.25" | 9 | MAX |
| E108 | E418 | SHIELD | | | | |
| E118 | E419 | COAX CABLE RS 178 B/U | 028-0013-00 | 4.75" | 9 | MAX |
| E119 | E415 | SHIELD | | | | |


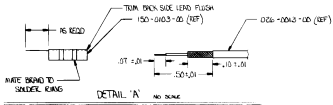


FIGURE 6-2 KY 97A Final Assembly (Sht 2 of 2)
(Dwg No 300-04268-0001, Rev AG, Sht 2)

Dwg 300-04268-0001 Rev AG Sht 2

6.4.3 KY 96A, KY 97A Unit Software Set

206-00021-0020 TOP SW BOM, KY96A/97A REV -
 206-00022-0020 TOP SW BOM, KY96A/97A REV -

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0020 |
|--------|----------------|---------|--------------------|----|-------|-------|
| | 057-03284-0020 | | SCM TAG | EA | 1.00 | 1.00 |
| | 205-00506-0020 | | BOARD HW/SW SET, K | EA | 1.00 | . |
| | 205-00507-0020 | | BOARD HW/SW SET, | EA | . | 1.00 |

205-00506-0020 BOARD HW/SW SET, KY96A/97A REV -
 205-00507-0020 BOARD HW/SW SET, KY96A/97A REV -

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0020 |
|--------|----------------|---------|--------------------|----|-------|-------|
| | 057-05252-0506 | | IDT 206-00506-00XX | EA | 1.00 | . |
| | 057-05252-0507 | | IDT 206-00507-00XX | EA | . | 1.00 |
| | 057-05335-0020 | | DECAL 205 DASH 20 | EA | 1.00 | 1.00 |
| | 125-00241-0020 | | SOFTWARE SET | EA | 1.00 | 1.00 |
| | 200-07475-0000 | | LCD PROCESSOR BD | EA | 1.00 | . |
| | 200-07475-0001 | | LCD PROC 136.975 | EA | . | 1.00 |

125-00241-0020 SOFTWARE SET REV A

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 |
|--------|----------------|----------------|-------------|----|-------|
| | 122-00605-0020 | 122-00605-0020 | IS | EA | 1.00 |

NOTE: Programmed chip P/N 122-00605-0020 = I702.

THIS PAGE RESERVED

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

206-00021-0000 REV 0 BDHW/SWSET135975 KY 0096A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY |
|--------|----------------|-------------------|---|----|----------|
| | | | | | 0000 |
| | 057-03284-0000 | UNIT SOFTWARE V00 | | EA | 1.00 |
| | 205-00506-0000 | BDHW/SWSET135975 | A | EA | 1.00 |

205-00506-0000 REV 0 BDHW/SWSET135975 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY |
|--------|----------------|-------------------|---|----|----------|
| | | | | | 0000 |
| | 057-02241-0000 | IDENT LABEL WB-00 | | EA | 1.00 |
| | 057-03531-0018 | SOFTWR REV TAG | | EA | 1.00 |
| | 125-00241-0000 | KY196/7A VHF XCVR | A | EA | 1.00 |
| | 200-07475-0000 | LCD PROCESSOR BD | A | EA | 1.00 |

125-00241-0000 KY196/7A VHF XCVR SOFTWARE SET REV 2 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY |
|--------|----------------|------------------|---|----|----------|
| | | | | | 0000 |
| I 507 | 122-00605-0000 | VHF COMM CONTROL | A | EA | 1.00 |

206-00022-0000 REV 0 UNITHW/SWSET136975 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY |
|--------|----------------|-------------------|---|----|----------|
| | | | | | 0000 |
| | 057-03284-0000 | UNIT SOFTWARE V00 | | EA | 1.00 |
| | 205-00507-0000 | BDHW/SWSET136975 | A | EA | 1.00 |

205-00507-0000 REV 0 BDHW/SWSET136975 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY |
|--------|----------------|-------------------|---|----|----------|
| | | | | | 0000 |
| | 057-02241-0000 | IDENT LABEL WB-00 | | EA | 1.00 |
| | 057-03531-0019 | SOFTWR REV TAG | | EA | 1.00 |
| | 125-00241-0000 | KY196/7A VHF XCVR | A | EA | 1.00 |
| | 200-07475-0001 | LCD PROC 136.975 | A | EA | 1.00 |

125-00241-0000 KY196/7A VHF XCVR SOFTWARE SET REV 2 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY |
|--------|----------------|------------------|---|----|----------|
| | | | | | 0000 |
| I 507 | 122-00605-0000 | VHF COMM CONTROL | A | EA | 1.00 |

NOTE: Programmed chip P/N 122-00605-0000 is actually I702.

THIS PAGE RESERVED

6.4.4 LCD Processor Board

200-07475-0000 LCD PROCESSOR BD REV 0
 200-07475-0001 LCD PROC 136.975 REV 1
 200-07475-0099 LCD PROC COMMON REV AB

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|
| C701 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | 1.00 |
| C702 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | 1.00 |
| C703 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | 1.00 |
| C704 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | 1.00 |
| C705 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | 1.00 |
| C706 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | 1.00 |
| C707 | 106-04154-0078 | | CAP CH 150KZ5U/50V | EA | . | . | 1.00 |
| CR701 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | . | . | 1.00 |
| CR702 | 007-06025-0000 | | DIO S 1N4003 | EA | . | . | 1.00 |
| CR703 | 007-06025-0000 | | DIO S 1N4003 | EA | . | . | 1.00 |
| CR704 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| CR705 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| CR706 | 007-06105-0000 | | DIO HV FDH444 | EA | . | . | 1.00 |
| CR707 | 007-06105-0000 | | DIO HV FDH444 | EA | . | . | 1.00 |
| CR708 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | . | 1.00 |
| CR709 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | . | 1.00 |
| CR710 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | . | 1.00 |
| CR711 | 007-06025-0000 | | DIO S 1N4003 | EA | . | . | 1.00 |
| CR712 | 007-06025-0000 | | DIO S 1N4003 | EA | . | . | 1.00 |
| DS701 | 037-00034-0002 | | LMP 8098 T1 14V | EA | . | . | 1.00 |
| DS702 | 037-00034-0002 | | LMP 8098 T1 14V | EA | . | . | 1.00 |
| I701 | 120-03163-0001 | | LM2901 SO-14 COMP | EA | . | . | 1.00 |
| I702 | 122-00605-9999 | | SOFTWARE PLACEHOLD | RF | . | . | .00 |
| I703 | 120-03127-0011 | | IC LM2903 SO PKG | EA | . | . | 1.00 |
| I704 | 120-02156-0000 | | 16X16 BIT EEPROM | EA | . | . | 1.00 |
| I705 | 123-04024-0003 | | IC 74HC4024 SO-14 | EA | . | . | 1.00 |
| I706 | 120-03246-0000 | | TLC541IFN AID CONV | EA | . | . | 1.00 |
| Q701 | 007-00280-0000 | | XSTR E176/J176 | EA | . | . | 1.00 |
| Q702 | 007-00466-0000 | | XSTR S PNP MMBTA56 | EA | . | . | 1.00 |
| Q703 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | . | 1.00 |
| Q704 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | . | 1.00 |
| Q705 | 007-00466-0000 | | XSTR S PNP MMBTA56 | EA | . | . | 1.00 |
| Q706 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | . | 1.00 |
| Q707 | 007-00454-0000 | | VMOS PWRFET | EA | . | . | 1.00 |
| Q708 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | 1.00 |
| Q709 | 007-00466-0000 | | XSTR S PNP MMBTA56 | EA | . | . | 1.00 |
| R701 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | . | 1.00 |
| R702 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R703 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R704 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | 1.00 |
| R705 | 139-05621-0000 | | RES CHIP 5.62KEW1% | EA | . | . | 1.00 |
| R706 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R707 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | 1.00 |
| R708 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | . | 1.00 |
| R709 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R710 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R711 | 139-09092-0000 | | RES CHIP 90.9KEW1% | EA | . | . | 1.00 |
| R712 | 131-00104-0013 | | RES CF 100K EW 5% | EA | . | . | 1.00 |
| R713 | 136-08871-0062 | | RES PF 8.87K EW1% | EA | . | . | 1.00 |
| R714 | 136-04872-0062 | | RES PF 48.7K EW 1% | EA | . | . | 1.00 |
| R715 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | 1.00 |
| R716 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R717 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R718 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | 1.00 |
| R719 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R720 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R721 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|
| R722 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R723 | 139-02742-0000 | | RES CHIP 27.4KEW1% | EA | . | . | 1.00 |
| R724 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R725 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R726 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| R727 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | 1.00 |
| R728 | 139-01822-0000 | | RES CHIP 18.2KEW1% | EA | . | . | 1.00 |
| R729 | 139-08252-0000 | | RES CH 82.5K EW 1% | EA | . | . | 1.00 |
| R730 | 139-01822-0000 | | RES CHIP 18.2KEW1% | EA | . | . | 1.00 |
| R731 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R732 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R733 | 139-02741-0000 | | RES CH 2.74K EW 1% | EA | . | . | 1.00 |
| R734 | 139-02741-0000 | | RES CH 2.74K EW 1% | EA | . | . | 1.00 |
| R735 | 139-02741-0000 | | RES CH 2.74K EW 1% | EA | . | . | 1.00 |
| R736 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | 1.00 |
| R737 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | 1.00 |
| R738 | 139-06192-0000 | | RES CH 61.9K EW 1% | EA | . | . | 1.00 |
| R739 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | 1.00 |
| R740 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R741 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R742 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R743 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R744 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | 1.00 |
| R745 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | 1.00 |
| R746 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | . | 1.00 |
| R747 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | . | 1.00 |
| R748 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | 1.00 |
| R749 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | 1.00 |
| R750 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | 1.00 |
| R751 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | 1.00 |
| R752 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | 1.00 |
| R753 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | 1.00 |
| R754 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | 1.00 |
| R755 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | 1.00 |
| R756 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| R757 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| R758 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | 1.00 |
| R759 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | . | 1.00 |
| R760 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R761 | 139-09091-0000 | | RES CH 9.09K EW 1% | EA | . | . | 1.00 |
| R762 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | 1.00 | . |
| R763 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . | . |
| R764 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | 1.00 |
| R765 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | 1.00 |
| R766 | 132-00204-0048 | | 1 WATT 390 OHM | EA | . | . | 1.00 |
| R767 | 132-00204-0034 | | 1 WATT 82 OHM | EA | . | . | 1.00 |
| REF1 | 300-07475-0000 | | LCD PROC BD ASSY | RF | . | . | .00 |
| REF2 | 002-07475-0000 | | KY 961/97A LCD PRO | RF | . | . | .00 |
| S701 | 031-00343-0002 | | SWITCH | EA | . | . | 1.00 |
| S702 | 031-00536-0000 | | SWITCH MOMENTARY | EA | . | . | 1.00 |
| S703 | 031-00536-0000 | | SWITCH MOMENTARY | EA | . | . | 1.00 |
| TP701 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | 1.00 |
| TP702 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | 1.00 |
| | 009-07475-0000 | | PC BD LCD PROC BD | EA | . | . | 1.00 |
| | 009-07964-0000 | | CABLE TIE BD | EA | . | . | 1.00 |
| | 016-01040-0000 | | COATING TYPE AR | AR | . | . | 1.00 |
| | 016-01122-0000 | | EPOXY DEVCON 14250 | AR | . | . | 1.00 |
| | 088-03413-0001 | | SWITCH MOUNTING | EA | . | . | 1.00 |
| | 200-07475-0099 | | LCD PROC COMMON | EA | 1.00 | 1.00 | . |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

200-07475-0000 LCD PROCESSOR BD REV 0 KY 0096A KY 0097A
 200-07475-0001 LCD PROC 136.975 REV 1 KY 0096A KY 0097A
 200-07475-0099 LCD PROC COMMON REV 7 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | |
|--------|--------------------|--------------------|------|------|----------|------|------|
| | | | | | 0000 | 0001 | 0099 |
| | 009-07475-0000 | PC BD LCD PROC BD | EA | . | . | 1.00 | |
| | 009-07964-0000 | CABLE TIE BD | EA | . | . | 1.00 | |
| | 016-01040-0000 | COATING TYPE AR | AR | . | . | 1.00 | |
| | 200-07475-0099 | LCD PROC COMMON | A EA | 1.00 | 1.00 | . | |
| C | 701 106-04121-0026 | CAPCH120PFNP0/100V | EA | . | . | 1.00 | |
| C | 702 106-04473-0047 | CAP CH 47K X7R/50V | EA | . | . | 1.00 | |
| C | 703 106-04473-0047 | CAP CH 47K X7R/50V | EA | . | . | 1.00 | |
| C | 704 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | 1.00 | |
| C | 705 106-04473-0047 | CAP CH 47K X7R/50V | EA | . | . | 1.00 | |
| C | 706 106-04121-0026 | CAPCH120PFNP0/100V | EA | . | . | 1.00 | |
| C | 707 106-04154-0078 | CAP CH 150KZ5U/50V | EA | . | . | 1.00 | |
| CR | 701 007-05117-0007 | DIO Z 6.2V SOT | EA | . | . | 1.00 | |
| CR | 702 007-06025-0000 | DIO S 1N4003 | EA | . | . | 1.00 | |
| CR | 703 007-06025-0000 | DIO S 1N4003 | EA | . | . | 1.00 | |
| CR | 704 999-09999-0098 | NOT USED | RF | . | . | X. | |
| CR | 705 999-09999-0098 | NOT USED | RF | . | . | X. | |
| CR | 706 007-06105-0000 | DIO HV FDH444 | EA | . | . | 1.00 | |
| CR | 707 007-06105-0000 | DIO HV FDH444 | EA | . | . | 1.00 | |
| CR | 708 007-06223-0000 | DIO DA204K | EA | . | . | 1.00 | |
| CR | 709 007-06181-0000 | DIO DUAL MMBD2835 | EA | . | . | 1.00 | |
| CR | 710 007-06181-0000 | DIO DUAL MMBD2835 | EA | . | . | 1.00 | |
| CR | 711 007-06025-0000 | DIO S 1N4003 | EA | . | . | 1.00 | |
| CR | 712 007-06025-0000 | DIO S 1N4003 | EA | . | . | 1.00 | |
| DS | 701 037-00034-0002 | LMP 8098 T1 14V | EA | . | . | 1.00 | |
| DS | 702 037-00034-0002 | LMP 8098 T1 14V | EA | . | . | 1.00 | |
| I | 701 120-03163-0001 | LM2901 SO-14 COMP | EA | . | . | 1.00 | |
| I | 702 999-09999-0090 | REF SFTWARE SET | RF | . | . | X. | |
| I | 703 120-03127-0011 | IC LM2903 SO PKG | EA | . | . | 1.00 | |
| I | 704 120-02156-0000 | 16X16 BIT EEPROM | EA | . | . | 1.00 | |
| I | 705 123-04024-0003 | IC 74HC4024 SO-14 | EA | . | . | 1.00 | |
| I | 706 120-03246-0000 | TLC541IFN AID CONV | EA | . | . | 1.00 | |
| Q | 701 007-00280-0000 | XSTR E176/J176 | EA | . | . | 1.00 | |
| Q | 702 007-00466-0000 | XSTR S PNP MMBTA56 | EA | . | . | 1.00 | |
| Q | 703 007-00467-0000 | XSTR S NPN MMBTA06 | EA | . | . | 1.00 | |
| Q | 704 007-00467-0000 | XSTR S NPN MMBTA06 | EA | . | . | 1.00 | |
| Q | 705 007-00466-0000 | XSTR S PNP MMBTA56 | EA | . | . | 1.00 | |
| Q | 706 007-00467-0000 | XSTR S NPN MMBTA06 | EA | . | . | 1.00 | |
| Q | 707 007-00454-0000 | VMOS PWRFET VN10KM | EA | . | . | 1.00 | |
| Q | 708 007-00179-0001 | XSTR SOT23 2N3904 | EA | . | . | 1.00 | |
| Q | 709 007-00466-0000 | XSTR S PNP MMBTA56 | EA | . | . | 1.00 | |
| R | 701 139-02001-0000 | RES CHIP 2K EW 1% | EA | . | . | 1.00 | |
| R | 702 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R | 703 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R | 704 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | 1.00 | |
| R | 705 139-05621-0000 | RES CHIP 5.62KEW1% | EA | . | . | 1.00 | |
| R | 706 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R | 707 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | 1.00 | |
| R | 708 139-03011-0000 | RES CH 3.01K EW 1% | EA | . | . | 1.00 | |
| R | 709 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R | 710 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R | 711 139-09092-0000 | RES CHIP 90.9KEW1% | EA | . | . | 1.00 | |
| R | 712 131-00104-0013 | RES CF 100K EW 5% | EA | . | . | 1.00 | |
| R | 713 136-08871-0062 | RES PF 8.87K EW1% | ** | . | . | 1.00 | |
| R | 714 136-04872-0062 | RES PF 48.7K EW 1% | EA | . | . | 1.00 | |
| R | 715 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | 1.00 | |
| R | 716 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R | 717 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.



| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | |
|--------|----------------|--------------------|----|------|----------|------|------|
| | | | | | 0000 | 0001 | 0099 |
| R 718 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | 1.00 | |
| R 719 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 720 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 721 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | 1.00 | |
| R 722 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 723 | 139-02742-0000 | RES CHIP 27.4KEW1% | EA | . | . | 1.00 | |
| R 724 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 725 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 726 | 999-09999-0098 | NOT USED | RF | . | . | X. | |
| R 727 | 139-03322-0000 | RES CH 33.2K EW 1% | EA | . | . | 1.00 | |
| R 728 | 139-01822-0000 | RES CHIP 18.2KEW1% | EA | . | . | 1.00 | |
| R 729 | 139-08252-0000 | RES CH 82.5K EW 1% | EA | . | . | 1.00 | |
| R 730 | 139-01822-0000 | RES CHIP 18.2KEW1% | EA | . | . | 1.00 | |
| R 731 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 732 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 733 | 139-02741-0000 | RES CH 2.74K EW 1% | EA | . | . | 1.00 | |
| R 734 | 139-02741-0000 | RES CH 2.74K EW 1% | EA | . | . | 1.00 | |
| R 735 | 139-02741-0000 | RES CH 2.74K EW 1% | EA | . | . | 1.00 | |
| R 736 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | 1.00 | |
| R 737 | 139-03922-0000 | RES CH 39.2K EW 1% | EA | . | . | 1.00 | |
| R 738 | 139-06192-0000 | RES CH 61.9K EW 1% | EA | . | . | 1.00 | |
| R 739 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | 1.00 | |
| R 740 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 741 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 742 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 743 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 744 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | 1.00 | |
| R 745 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | 1.00 | |
| R 746 | 139-02001-0000 | RES CHIP 2K EW 1% | EA | . | . | 1.00 | |
| R 747 | 139-02001-0000 | RES CHIP 2K EW 1% | EA | . | . | 1.00 | |
| R 748 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | 1.00 | |
| R 749 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | 1.00 | |
| R 750 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | 1.00 | |
| R 751 | 139-00100-0000 | RES CHIP 10 EW 1% | EA | . | . | 1.00 | |
| R 752 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | 1.00 | |
| R 753 | 139-00100-0000 | RES CHIP 10 EW 1% | EA | . | . | 1.00 | |
| R 754 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | 1.00 | |
| R 755 | 139-03922-0000 | RES CH 39.2K EW 1% | EA | . | . | 1.00 | |
| R 756 | 999-09999-0098 | NOT USED | RF | . | . | X. | |
| R 757 | 999-09999-0098 | NOT USED | RF | . | . | X. | |
| R 758 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | 1.00 | |
| R 759 | 139-05110-0000 | RES CH 511 EW 1% | EA | . | . | 1.00 | |
| R 760 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 761 | 139-09091-0000 | RES CH 9.09K EW 1% | EA | . | . | 1.00 | |
| R 762 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | 1.00 | 1.00 | . | |
| R 763 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | 1.00 | . | . | |
| R 764 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | 1.00 | |
| R 765 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | 1.00 | |
| R 766 | 132-00204-0048 | 1 WATT 390 OHM | EA | . | . | 1.00 | |
| R 767 | 132-00204-0034 | 1 WATT 82 OHM | EA | . | . | 1.00 | |
| REF 1 | 300-07475-0000 | LCD PROC BD ASSY | RF | . | . | X. | |
| REF 2 | 002-07475-0000 | SCH LCD PROC BD | RF | . | . | X. | |
| S 701 | 031-00343-0002 | SWITCH | EA | . | . | 1.00 | |
| S 702 | 031-00536-0000 | SWITCH MOMENTARY | EA | . | . | 1.00 | |
| S 703 | 031-00536-0000 | SWITCH MOMENTARY | EA | . | . | 1.00 | |
| TP 701 | 008-00096-0001 | TERMINAL TEST PNT | EA | . | . | 1.00 | |
| TP 702 | 008-00096-0001 | TERMINAL TEST PNT | EA | . | . | 1.00 | |

NOTE: ADD 700 TO ALL REFERENCE DESIGNATORS.
 I.E: R1 + R701

205-XXXX-
 057-2241-XX
 (ON NEXT ASSY)
 DETAIL 'B'

NOTES:

1. PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH KPN 016-1040-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS, ALL "E" NUMBERS, SWITCHES, DS1, DS2.
2. R762 INSTALLED ON 200-7475-00 AND 200-7475-01. R763 INSTALLED ON 200-7475-00 ONLY.
3. Q707 NEEDS TO LAY FLAT ON THE BOARD TO AVOID INTERFERENCE WITH VOLUME CABLE.
4. CLIP PINS ON S2 FLUSH WITH TOP OF S2
5. CLIP CENTER TWO PINS OF S3 FLUSH WITH S3 AND SOLDER 009-7964-00 TO TOP OF S3.
6. INSTALL 057-3531-XX TAG ON FARSIDE OF BOARD.

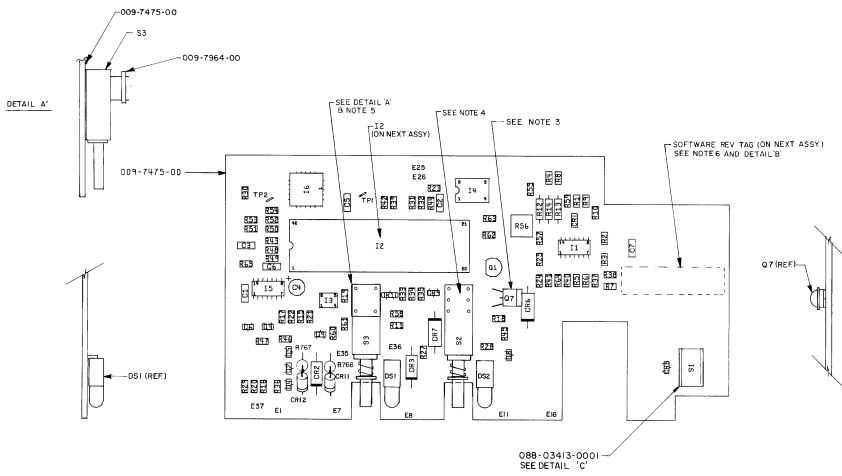

- DETAIL 'C' -

Dwg 300-07475-0000 Rev AA



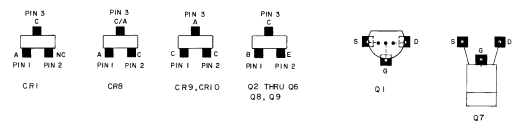


FIGURE 6-3 LCD Processor Board Assembly
 (Dwg No 300-07475-0000, Rev AA)

NOTE: ADD 700 TO ALL REFERENCE DESIGNATORS.
 I.E. R1 - R701



- NOTES:
1. PINS TO POST COATING BOTH SIDES OF P.C. BOARD WITH AN 009-7475-00 MASK OF THE FOLLOWING: ALL MOUNTING AREAS, ALL 'E' NUMBERS, SWITCHES, DS1, DS2
 2. R762 INSTALLED ON 200-7475-00 AND 200-7475-01. R765 INSTALLED ON 200-7475-00 ONLY.
 3. Q707 NEEDS TO LAY FLAT ON THE BOARD TO AVOID INTERFERENCE WITH VOLUME CABLE.
 4. CLIP PINS ON S2 FLUSH WITH TOP OF S2
 5. CLIP CENTER TWO PINS OF S3 FLUSH WITH S3 AND SOLDER 009-7964-00 TO TOP OF S3.
 6. INSTALL 057-3531-XX TAG ON FAR SIDE OF BOARD.

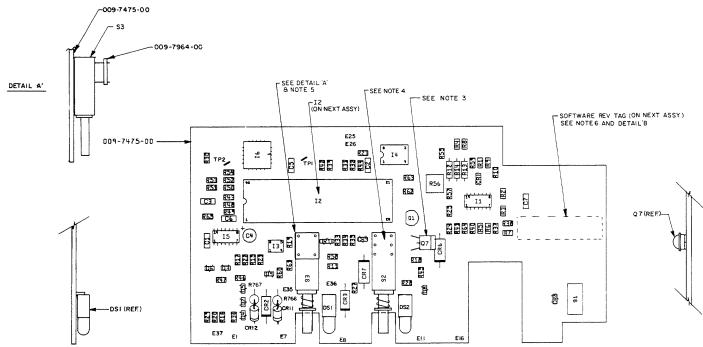

Dwg 300-07475-0000 Rev 3

FIGURE 6-3A LCD Processor Board Assembly
 (Dwg No 300-07475-0000, Rev 3)



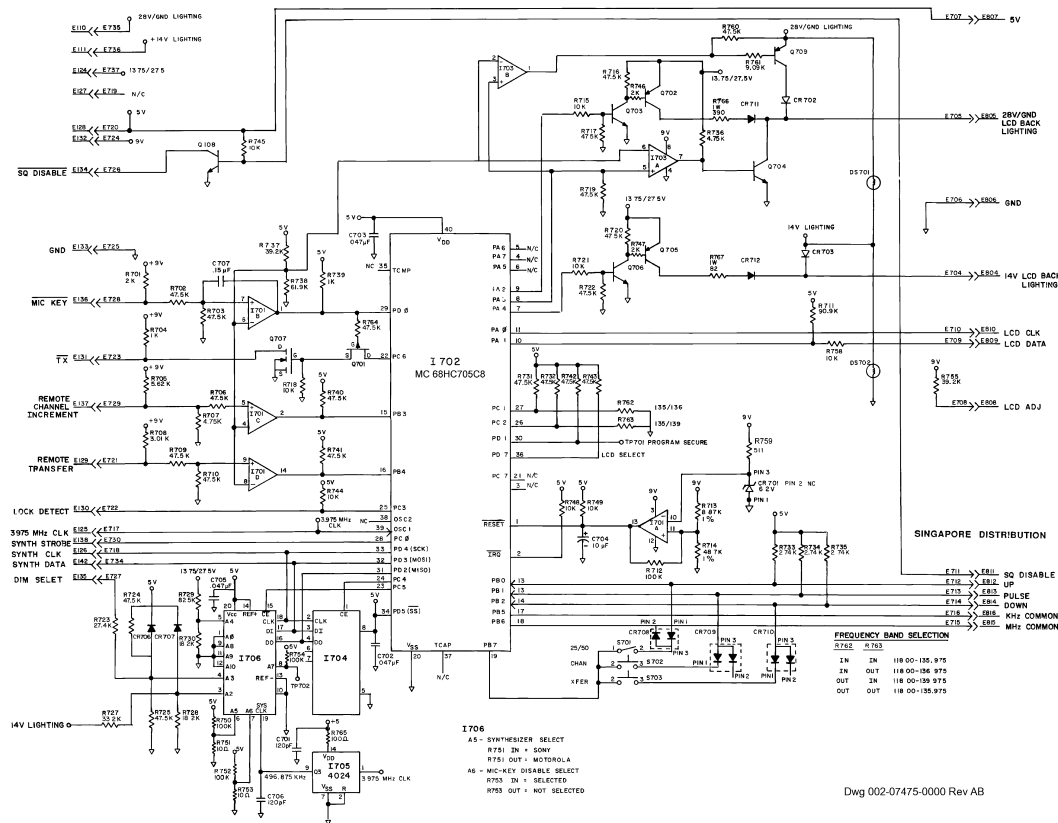


FIGURE 6-4 LCD Processor Board Schematic (Dwg No 002-07475-0000, Rev AB)

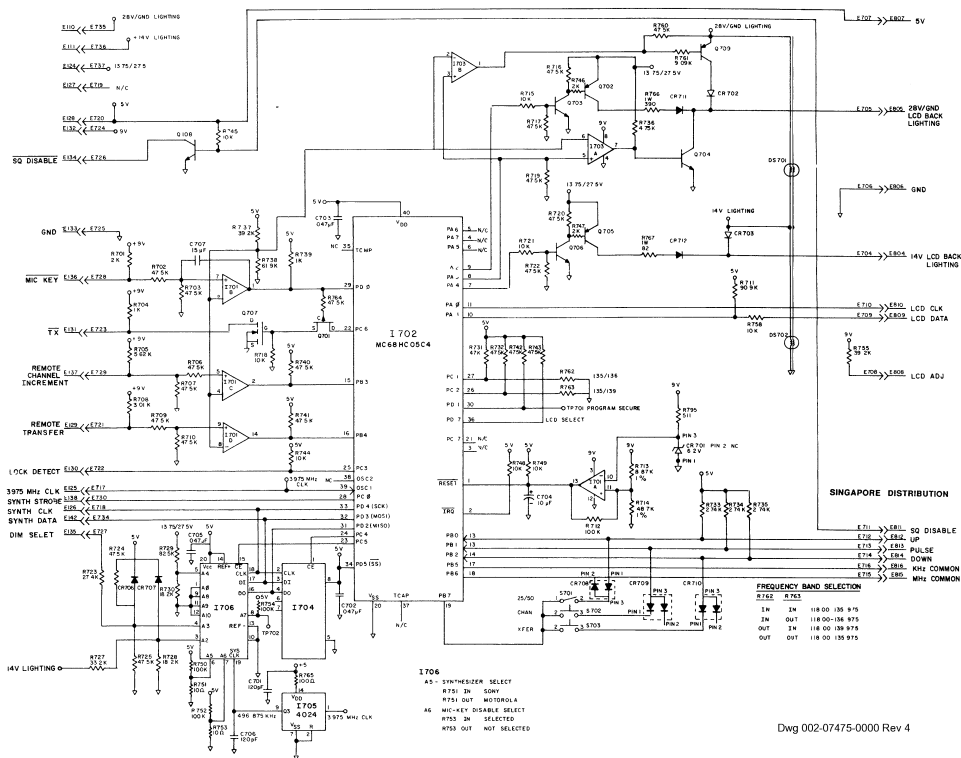

Dwg 002-07475-0000 Rev 4

FIGURE 6-4A LCD Processor Board Schematic (Dwg No 002-07475-0000, Rev 4)

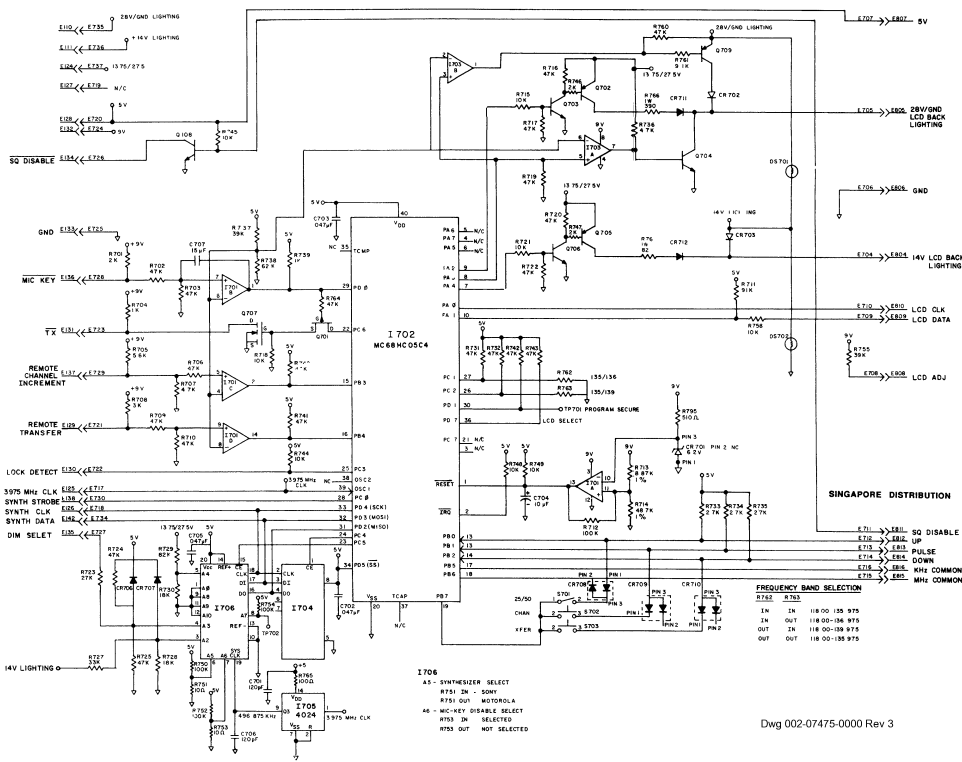

Dwg 002-07475-0000 Rev 3

FIGURE 6-4B LCD Processor Board Schematic
(Dwg No 002-07475-0000, Rev 3)

6.4.5 KY 97A (14V) Modulator Assembly

200-04270-0000 14V MODULATOR ASSY

REV AA

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 |
|--------|----------------|---------|--------------------|----|-------|
| C266 | 111-00001-0001 | | CAP CR .1UF 50V | EA | 1.00 |
| Q124 | 007-00168-0000 | | XSTR PNP 2N4398 | EA | 1.00 |
| REF1 | 300-04270-0000 | | COMM TRANSCEIVER K | RF | .00 |
| RT101 | 134-01027-0000 | | POSISTOR BE | EA | 1.00 |
| | 008-00050-0001 | | GND LUG | EA | 1.00 |
| | 026-00004-0000 | | WIRE, CU, 20AWG, T | IN | 4.50 |
| | 073-00388-0004 | | HEAT SINK 196A | EA | 1.00 |
| | 076-00159-0000 | | SPACER INSUL | EA | 2.00 |
| | 088-00829-0000 | | INSL | EA | 3.00 |
| | 089-02013-0037 | | NUT FLAT 6-32 | EA | 2.00 |
| | 089-05432-0003 | | SCR, MACH, 2-56, F | EA | 6.00 |
| | 089-05907-0008 | | SCR PHP 6-32X1/2 | EA | 2.00 |
| | 089-08016-0037 | | WSHR INTL LK #6 | EA | 1.00 |
| | 089-08027-0011 | | WSHR FLT STD #6 | EA | 1.00 |
| | 089-08080-0030 | | WSHR FLT STD .147 | EA | 2.00 |
| | 091-00038-0000 | | WASHER EXT NY | EA | 2.00 |
| | 091-00283-0002 | | TO-3 INSULATOR | EA | 1.00 |
| | 150-00003-0010 | | TUBING TFLN 24AWG | IN | 4.00 |
| | 150-00005-0010 | | TUBING TFLN 20AWG | IN | 7.25 |


THIS PAGE RESERVED

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

200-04270-0000 REV 9 14V MODULATOR ASSY KY 0097A KY 0197A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY 0000 |
|--------|--------------------|--------------------|----|----|------------------|
| | 008-00050-0001 | GND LUG | | EA | 1.00 |
| | 026-00004-0000 | WIRE COP TIN 20G | | IN | 6.25 |
| | 073-00388-0004 | HEAT SINK 196A | A | EA | 1.00 |
| | 076-00159-0000 | SPACER INSUL | | EA | 2.00 |
| | 088-00829-0000 | INSL | | EA | 3.00 |
| | 089-02013-0037 | NUT FLAT 6-32 | | EA | 2.00 |
| | 089-05432-0003 | SCR FHP 2-56X3/16 | | EA | 6.00 |
| | 089-05907-0008 | SCR PHP 6-32X1/2 | | EA | 2.00 |
| | 089-08016-0037 | WSHR INTL LK #6 | | EA | 1.00 |
| | 089-08027-0011 | WSHR FLT STD #6 | | EA | 1.00 |
| | 089-08080-0030 | WSHR FLT STD .147 | | EA | 2.00 |
| | 091-00038-0000 | WASHER EXT NY | | EA | 2.00 |
| | 091-00283-0002 | TO-3 INSULATOR | | EA | 1.00 |
| | 150-00003-0010 | TUBING TFLN 24AWG | | IN | 4.00 |
| | 150-00005-0010 | TUBING TFLN 20AWG | | IN | 9.00 |
| C | 266 111-00001-0001 | CAP CR .1UF 50V | | EA | 1.00 |
| Q | 124 007-00168-0000 | XSTR PNP 2N4398 | | EA | 1.00 |
| REF | 1 300-04270-0000 | 14V MODULATOR ASSY | RF | | X. |
| RT | 101 134-01027-0000 | POSISTOR BE | | EA | 1.00 |

THIS PAGE RESERVED

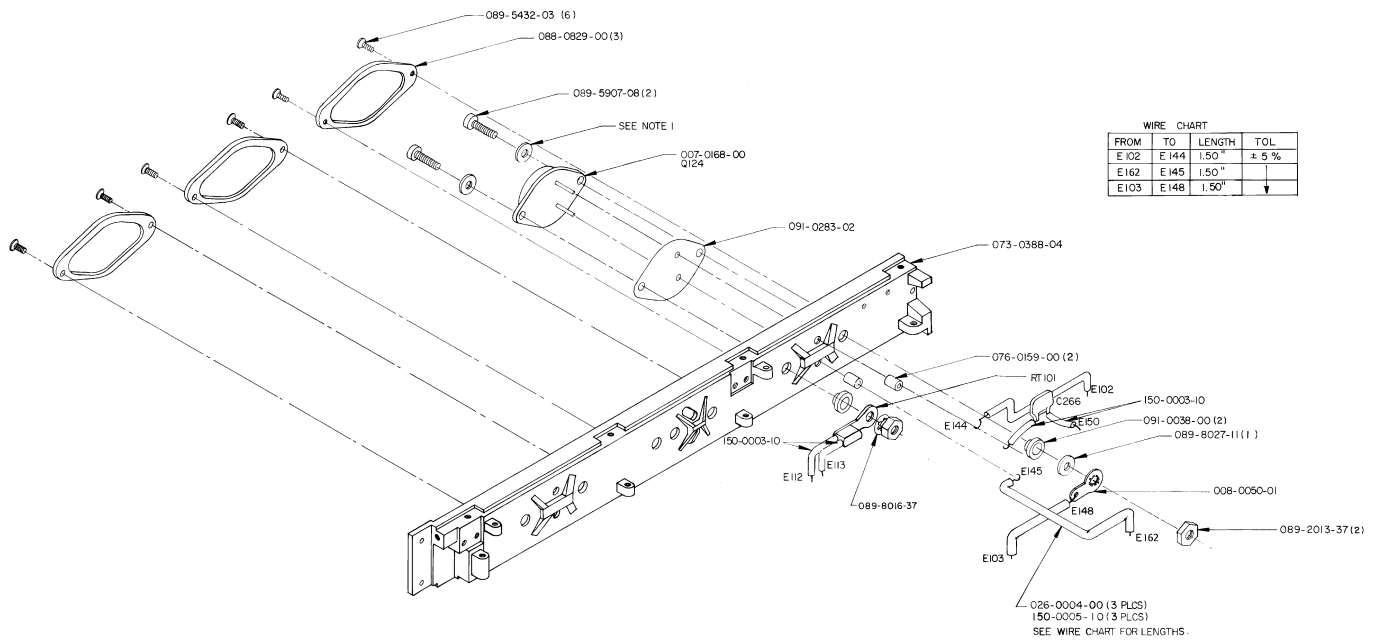

WIRE CHART

| FROM | TO | LENGTH | TOL. |
|------|------|--------|-------|
| E102 | E144 | 1.50" | ± 5 % |
| E162 | E145 | 1.50" | |
| E103 | E148 | 1.50" | |

NOTE:
 1. ADD 089-8080-30 (1 EACH, AS REQUIRED TO COMPENSATE FOR DIFFERENCES IN THICKNESS OF Q124 AND HEATSINK

Dwg 300-04270-0000 Rev AA

REF B/M 200-4270-00

FIGURE 6-5 KY 97A (14V) Modulator Assembly
 (Dwg No 300-04270-0000, Rev AA)

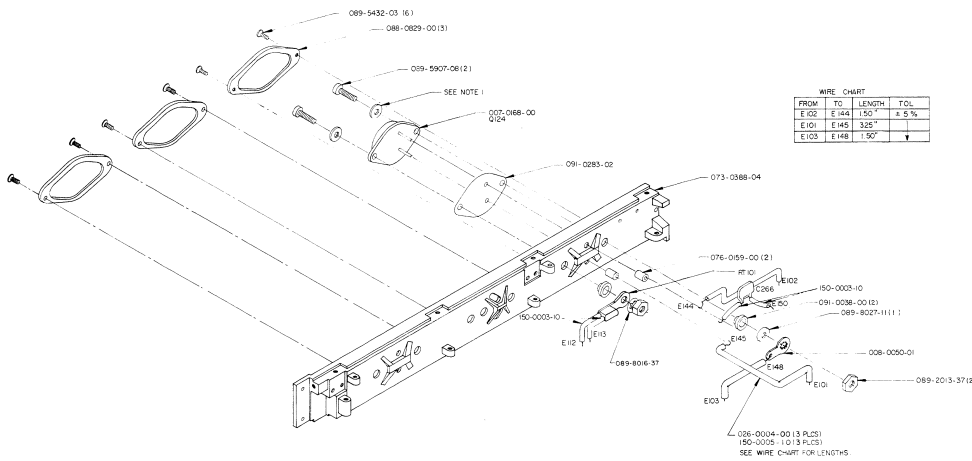


FIGURE 6-5A KY 97A (14V) Modulator Assembly
(Dwg No 300-04270-0000, Rev 6)

6.4.6 KY 96A (28V) Modulator Assembly

200-04271-0000 28V MODULATOR ASSY

REV AA

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 |
|--------|----------------|---------|--------------------|----|-------|
| C266 | 111-00001-0001 | | CAP CR .1UF 50V | EA | 1.00 |
| Q124 | 007-00963-0000 | | XSTR MJ11012 NPN | EA | 1.00 |
| Q130 | 007-00963-0000 | | XSTR MJ11012 NPN | EA | 1.00 |
| REF1 | 300-04271-0000 | | COMM TRANSCEIVER K | RF | .00 |
| RT101 | 134-01027-0001 | | POSISTOR BD | EA | 1.00 |
| | 008-00041-0000 | | SLDR LUG, DUEL | EA | 1.00 |
| | 008-00050-0001 | | GND LUG | EA | 1.00 |
| | 026-00004-0000 | | WIRE, CU, 20AWG, T | IN | 23.00 |
| | 073-00388-0004 | | HEAT SINK 196A | EA | 1.00 |
| | 076-00159-0000 | | SPACER INSUL | EA | 4.00 |
| | 076-01063-0000 | | NYLON HEX NUT | EA | 1.00 |
| | 088-00829-0000 | | INSL | EA | 3.00 |
| | 089-02013-0037 | | NUT FLAT 6-32 | EA | 3.00 |
| | 089-05432-0003 | | SCR, MACH, 2-56, F | EA | 6.00 |
| | 089-05907-0006 | | SCR PHP 6-32X3/8 | EA | 1.00 |
| | 089-05907-0008 | | SCR PHP 6-32X1/2 | EA | 3.00 |
| | 089-08016-0037 | | WSHR INTL LK #6 | EA | 1.00 |
| | 089-08027-0011 | | WSHR FLT STD #6 | EA | 2.00 |
| | 089-08080-0030 | | WSHR FLT STD .147 | AR | 4.00 |
| | 091-00038-0000 | | WASHER EXT NY | EA | 3.00 |
| | 091-00283-0002 | | TO-3 INSULATOR | EA | 2.00 |
| | 150-00003-0010 | | TUBING TFLN 24AWG | IN | 3.00 |
| | 150-00005-0010 | | TUBING TFLN 20AWG | IN | 20.95 |


THIS PAGE RESERVED

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

200-04271-0000 REV 13 28V MODULATOR ASSY KY 0096A KY 0196A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY |
|--------|----------------|-------------------|---|----|----------|
| | | | | | 0000 |
| | 008-00041-0000 | SLDR LUG, DUEL | | EA | 1.00 |
| | 008-00050-0001 | GND LUG | | EA | 1.00 |
| | 026-00004-0000 | WIRE COP TIN 20G | | IN | 24.27 |
| | 073-00388-0004 | HEAT SINK 196A | A | EA | 1.00 |
| | 076-00159-0000 | SPACER INSUL | | EA | 4.00 |
| | 076-01063-0000 | NYLON HEX NUT | | EA | 1.00 |
| | 088-00829-0000 | INSL | | EA | 3.00 |
| | 089-02013-0037 | NUT FLAT 6-32 | | EA | 3.00 |
| | 089-05432-0003 | SCR FHP 2-56X3/16 | | EA | 6.00 |
| | 089-05907-0006 | SCR PHP 6-32X3/8 | | EA | 1.00 |
| | 089-05907-0008 | SCR PHP 6-32X1/2 | | EA | 3.00 |
| | 089-08016-0037 | WSHR INTL LK #6 | | EA | 1.00 |
| | 089-08027-0011 | WSHR FLT STD #6 | | EA | 2.00 |
| | 089-08080-0030 | WSHR FLT STD .147 | | AR | 4.00 |
| | 091-00038-0000 | WASHER EXT NY | | EA | 3.00 |
| | 091-00283-0002 | TO-3 INSULATOR | | EA | 2.00 |
| | 150-00003-0010 | TUBING TFLN 24AWG | | IN | 3.00 |
| | 150-00005-0010 | TUBING TFLN 20AWG | | IN | 22.25 |
| C | 266 | 111-00001-0001 | | EA | 1.00 |
| Q | 124 | 007-00963-0000 | | EA | 1.00 |
| Q | 130 | 007-00963-0000 | | EA | 1.00 |
| REF | 1 | 300-04271-0000 | | RF | X. |
| RT | 101 | 134-01027-0001 | | EA | 1.00 |

THIS PAGE RESERVED

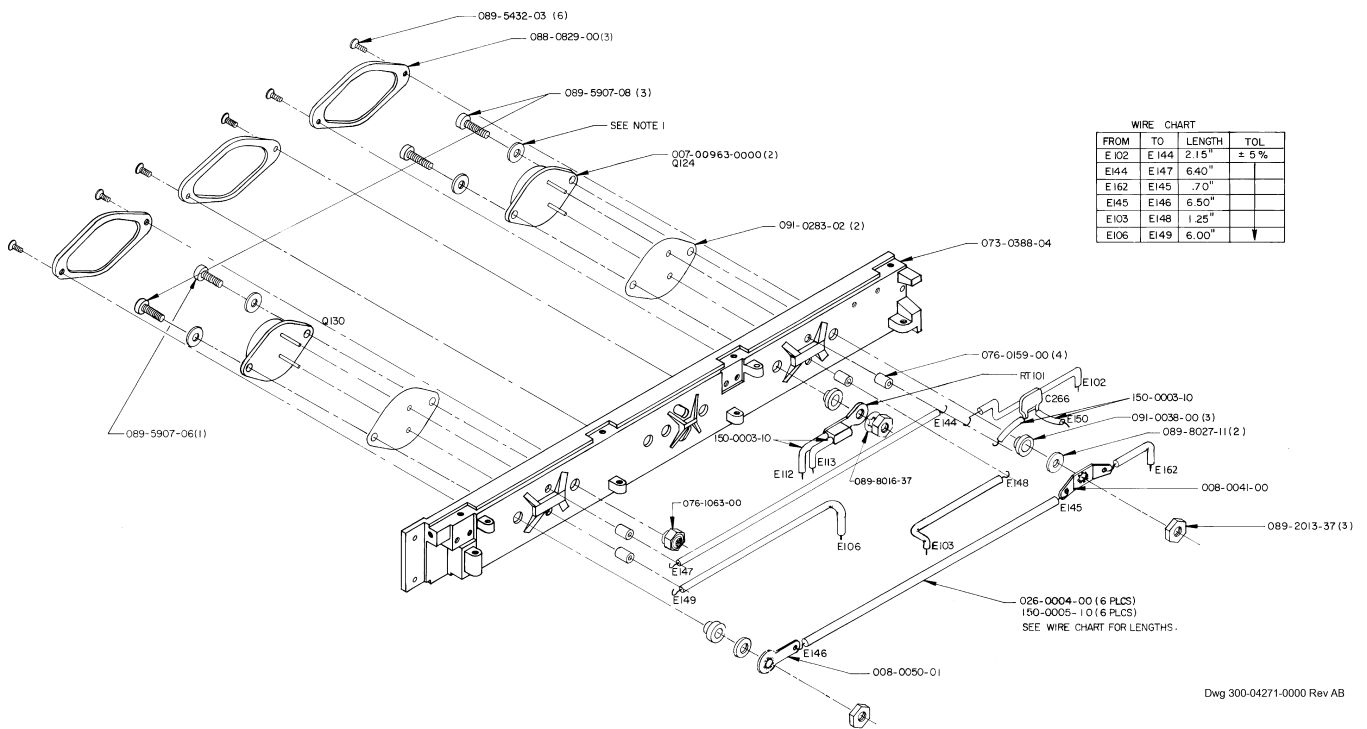


WIRE CHART

| FROM | TO | LENGTH | TOL |
|------|------|--------|------|
| E102 | E144 | 2.15" | ± 5% |
| E144 | E147 | 6.40" | |
| E162 | E145 | .70" | |
| E145 | E146 | 6.50" | |
| E103 | E148 | 1.25" | |
| E106 | E149 | 6.00" | ↓ |

NOTE:
 1. ADD 089-8080-3Q1 EACH, AS REQUIRED TO COMPENSATE FOR DIFFERENCES IN THICKNESS OF Q124, Q130 AND HEATSINK

Dwg 300-04271-0000 Rev AB
 REF B/M 200-4271-00

FIGURE 6-6 KY 96A (28V) Modulator Assembly
 (Dwg No 300-04271-0000, Rev AB)

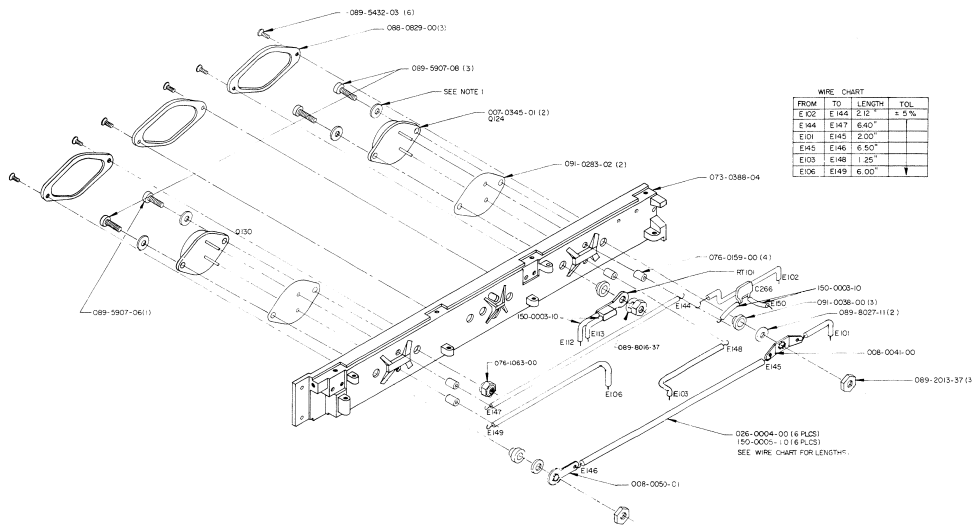

NOTE
1. ADD 089-8040-01 EACH, AS REQUIRED TO COMPENSATE FOR DIFFERENCES IN THICKNESS OF 024, 030 AND HELIXAK

Dwg 300-04271-0000 Rev 6

FIGURE 6-6A KY 96A (28V) Modulator Assembly
(Dwg No 300-04271-0000, Rev 6)

6.4.7 LCD Display Board

| 200-07479-0000 LCD DISPLAY BD | | REV AC | | | | |
|-------------------------------|----------------|---------|--------------------|----|-------|-------|
| 200-07479-0001 LCD DISPLAY BD | | REV AC | | | | |
| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 |
| C801 | 106-04104-0047 | | CH 100KX7R/50V | EA | 1.00 | 1.00 |
| C802 | 113-03121-0000 | | CAP DC 120PF 500V | EA | 1.00 | 1.00 |
| CR801 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | 1.00 | 1.00 |
| CR802 | 007-06222-0000 | | DIO DAN202K | EA | 1.00 | 1.00 |
| CR803 | 007-06222-0000 | | DIO DAN202K | EA | 1.00 | 1.00 |
| DS802 | 037-00027-0001 | | LMP 6802AS15 T1 5V | EA | 1.00 | 1.00 |
| DS803 | 037-00027-0001 | | LMP 6802AS15 T1 5V | EA | 1.00 | 1.00 |
| DS804 | 037-00027-0001 | | LMP 6802AS15 T1 5V | EA | 1.00 | 1.00 |
| DS805 | 037-00027-0001 | | LMP 6802AS15 T1 5V | EA | 1.00 | 1.00 |
| DS806 | 037-00027-0001 | | LMP 6802AS15 T1 5V | EA | 1.00 | 1.00 |
| DS807 | 037-00027-0001 | | LMP 6802AS15 T1 5V | EA | 1.00 | 1.00 |
| I801 | 120-02254-0000 | | IC LCD DRIVER 40X4 | EA | 1.00 | 1.00 |
| Q801 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | 1.00 | 1.00 |
| R801 | 139-06811-0000 | | RES CH 6.81K EW 1% | EA | 1.00 | 1.00 |
| R802 | 133-00351-0006 | | POTENTIOMETER 47K | EA | 1.00 | 1.00 |
| R803 | 139-02003-0000 | | RES CHIP 200KEW1% | EA | 1.00 | 1.00 |
| R804 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | 1.00 | 1.00 |
| REF1 | 300-07479-0000 | | DISPLAY BOARD | RF | .00 | .00 |
| REF2 | 002-07479-0000 | | LCD DISPLAY BOARD | RF | .00 | .00 |
| S801 | 133-00398-0003 | | POT DUAL, SW | EA | 1.00 | 1.00 |
| | 009-07479-0000 | | PC BD LCD DSPL BD | EA | 1.00 | 1.00 |
| | 012-01602-0000 | | TAPE, PAPER DOUBLE | IN | .40 | .40 |
| | 016-01008-0004 | | GLYPTAL 7526 BL | AR | 1.00 | 1.00 |
| | 016-01013-0000 | | VAC GREASE DC 976 | AR | 1.00 | 1.00 |
| | 016-01040-0000 | | COATING TYPE AR | AR | 1.00 | 1.00 |
| | 016-01140-0000 | | SUPERBONDER 415 | AR | 1.00 | 1.00 |
| | 016-01144-0001 | | ACCELERATOR 11525 | AR | 1.00 | 1.00 |
| | 016-01412-0000 | | LOCTITE 425 | AR | 1.00 | 1.00 |
| | 026-00002-0000 | | WIRE, CU, 24AWG, T | IN | 1.50 | 1.50 |
| | 030-02490-0002 | | COND RBR CONN | EA | 1.00 | 1.00 |
| | 030-02490-0003 | | COND RBR CONN | EA | 1.00 | 1.00 |
| | 043-00036-0001 | | LCD KY96A/96A | EA | 1.00 | 1.00 |
| | 047-05019-0000 | | SPRING SW 10POS | EA | 1.00 | 1.00 |
| | 047-08221-0001 | | LCD MTG BRK | EA | 1.00 | 1.00 |
| | 047-08608-0001 | | LCD RETAINER | EA | 1.00 | 1.00 |
| | 076-00248-0003 | | SPACER .365 | EA | 1.00 | 1.00 |
| | 076-03051-0002 | | SPOOL PART W/ FINI | EA | 1.00 | 1.00 |
| | 088-00767-0001 | | KNOB | EA | 1.00 | . |
| | 088-00769-0000 | | SLEEVE LOCKING | EA | 1.00 | 1.00 |
| | 088-00770-0000 | | HOUSING SWITCH | EA | 1.00 | 1.00 |
| | 088-00770-0001 | | HOUSING SWITCH | EA | 1.00 | 1.00 |
| | 088-01022-0001 | | CONTACT ASSY | EA | 2.00 | 2.00 |
| | 088-01057-0023 | | SHAFT W / KNOB RIN | EA | 1.00 | . |
| | 088-02163-0000 | | LIGHT BLK HOLDER | EA | 1.00 | 1.00 |
| | 088-02273-0001 | | LIGHT BLOCK, LCD | EA | 1.00 | 1.00 |
| | 088-03120-0000 | | KNOB OUTER | EA | . | 1.00 |
| | 088-03121-0021 | | KNOB PAINTED | EA | . | 1.00 |
| | 089-02106-0011 | | NUT FLAT 1/4-32 | EA | 1.00 | 1.00 |
| | 089-05519-0003 | | SCR FLHP 2-56X3/16 | EA | 7.00 | 7.00 |
| | 089-06200-0003 | | SCR SET 2-56X3/32 | EA | 1.00 | 1.00 |
| | 089-06689-0006 | | SCR PHP PLASTITE | EA | 2.00 | 2.00 |
| | 089-08093-0030 | | WSHR FLT STD .094 | EA | 10.00 | 10.00 |
| | 089-08309-0000 | | WASHER INSULATING | EA | 2.00 | 2.00 |
| | 090-00019-0005 | | RING RTNR .188 | EA | 2.00 | 2.00 |
| | 150-00003-0010 | | TUBING TFLN 24AWG | IN | 1.50 | 1.50 |


THIS PAGE RESERVED

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

200-07479-0000 LCD DISPLAY BD REV 11 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY |
|--------|----------------|--------------------|--------------------|----|----------|
| | | | | | 0000 |
| | 009-07479-0000 | PC BD LCD DSPL BD | | EA | 1.00 |
| | 016-01008-0004 | GLYPTAL 7526 BL | | AR | 1.00 |
| | 016-01013-0000 | VAC GREASE DC 976 | | AR | 1.00 |
| | 016-01040-0000 | COATING TYPE AR | | AR | 1.00 |
| | 016-01140-0000 | SUPERBONDER 415 | | AR | 1.00 |
| | 016-01144-0001 | ACCELERATOR 11525 | | AR | 1.00 |
| | 026-00002-0000 | WIRE COP TIN 24G | | IN | 1.50 |
| | 030-02490-0002 | COND RBR CONN | | EA | 1.00 |
| | 030-02490-0003 | COND RBR CONN | | EA | 1.00 |
| | 043-00036-0001 | LCD KY96A/96A | | EA | 1.00 |
| | 047-05019-0000 | SPRING SW 10POS | | EA | 1.00 |
| | 047-08221-0001 | LCD MTG BRK | A | EA | 1.00 |
| | 047-08608-0001 | LCD RETAINER | A | EA | 1.00 |
| | 076-00248-0003 | SPACER .365 | | EA | 1.00 |
| | 088-00720-0000 | SPOOL SWITCH | | EA | 1.00 |
| | 088-00767-0001 | KNOB | A | EA | 1.00 |
| | 088-00769-0000 | SLEEVE LOCKING | | EA | 1.00 |
| | 088-00770-0000 | HOUSING SWITCH | | EA | 1.00 |
| | 088-00770-0001 | HOUSING SWITCH | | EA | 1.00 |
| | 088-01022-0001 | CONTACT ASSY | A | EA | 2.00 |
| | 088-01057-0003 | KNOB STAMPED | A | EA | 1.00 |
| | 088-02163-0000 | LIGHT BLK HOLDER | | EA | 1.00 |
| | 088-02273-0001 | LIGHT BLOCK, LCD | | EA | 1.00 |
| | 089-02106-0011 | NUT FLAT 1/4-32 | | EA | 1.00 |
| | 089-05519-0002 | SCR FLHP 2-56X1/8 | | EA | 5.00 |
| | 089-05519-0003 | SCR FLHP 2-56X3/16 | | EA | 2.00 |
| | 089-06689-0006 | SCR PHP PLASTITE | | EA | 2.00 |
| | 089-08309-0000 | WASHER INSULATING | | EA | 2.00 |
| | 090-00019-0005 | RING RTNR .188 | | EA | 2.00 |
| | 090-00036-0004 | RING RTNR .051 | | EA | 1.00 |
| | 150-00003-0010 | TUBING TFLN 24AWG | | IN | 1.50 |
| C | 801 | 106-04104-0047 | CH 100KX7R/50V | EA | 1.00 |
| C | 802 | 113-03121-0000 | CAP DC 120PF 500V | EA | 1.00 |
| CR | 801 | 007-06223-0000 | DIO DA204K | EA | 1.00 |
| CR | 802 | 007-06222-0000 | DIO DAN202K | EA | 1.00 |
| CR | 803 | 007-06222-0000 | DIO DAN202K | EA | 1.00 |
| DS | 802 | 037-00027-0001 | LMP 6802AS15 T1 5V | EA | 1.00 |
| DS | 803 | 037-00027-0001 | LMP 6802AS15 T1 5V | EA | 1.00 |
| DS | 804 | 037-00027-0001 | LMP 6802AS15 T1 5V | EA | 1.00 |
| DS | 805 | 037-00027-0001 | LMP 6802AS15 T1 5V | EA | 1.00 |
| DS | 806 | 037-00027-0001 | LMP 6802AS15 T1 5V | EA | 1.00 |
| DS | 807 | 037-00027-0001 | LMP 6802AS15 T1 5V | EA | 1.00 |
| I | 801 | 120-02254-0000 | IC LCD DRIVER 40X4 | EA | 1.00 |
| Q | 801 | 007-00813-0000 | XSTR NPN S MMBTA14 | EA | 1.00 |
| R | 801 | 139-06811-0000 | RES CH 6.81K EW 1% | EA | 1.00 |
| R | 802 | 133-00351-0006 | POTENTIOMETER 47K | EA | 1.00 |
| R | 803 | 139-02003-0000 | RES CHIP 200KEW1% | EA | 1.00 |
| R | 804 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | 1.00 |
| REF | 1 | 300-07479-0000 | LCD DSPL BD ASSY | RF | X. |
| REF | 2 | 002-07479-0000 | SCH LCD DSPL BD | RF | X. |
| S | 801 | 133-00398-0001 | POT/DUAL SW | EA | 1.00 |

THIS PAGE RESERVED

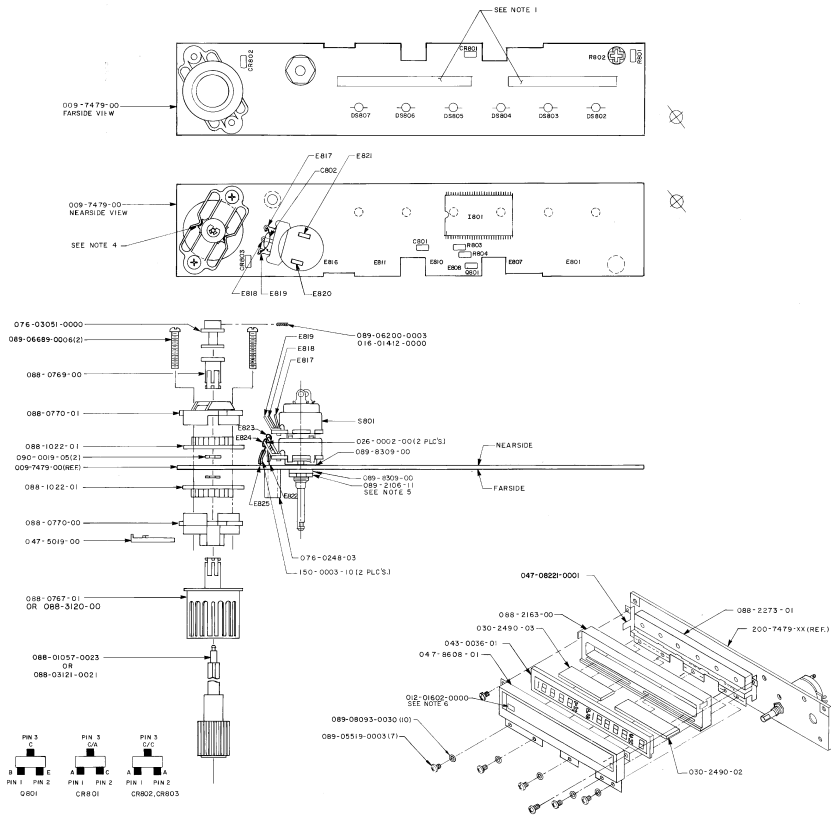

- NOTES:**
1. PRIOR TO POST COATING BOTH SIDES OF P.C BOARD WITH KRN 210-1040-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS; S801; S802; TUNG (D801); SWITCH CONTACT AREAS; ZEDRA STRIP CONTACT AREAS.
 2. INSTALL SPRING (047-5019-00) ON HOUSING (088-0770-00) AFTER SWITCH IS ASSEMBLED ON THE P.C BOARD.
 3. NOTE DELETED
 4. APPLY SMALL AMOUNT OF SILICONE GREASE (KPN 06-1013-00) TO DETENT CONTACT POINTS AND SWITCH SHAFTS. CAUTION: DO NOT GET GREASE ON P.C BOARD OR SWITCH CONTACT.
 5. AFTER ASSEMBLY, APPLY A SMALL AMOUNT OF GLYPTAL (06-1009-04) TO THE RETAINING NUT (089-2006-11) TO SECURE IT TO THE THREADED BUSHING OF S1. CAUTION: DO NOT APPLY GLYPTAL TO THE ROTATING SHAFT OF S801.
 6. CUT 2 PIECES, DOUBLE-SIDED TAPE .2" LONG, PASTE IT TO THE CORNER OF LCD.

REF. B/M: 200-7479-XX

Dwg 300-07479-0000 Rev AC

FIGURE 6-7 LCD Display Board Assembly
(Dwg No 300-07479-0000, Rev AC)


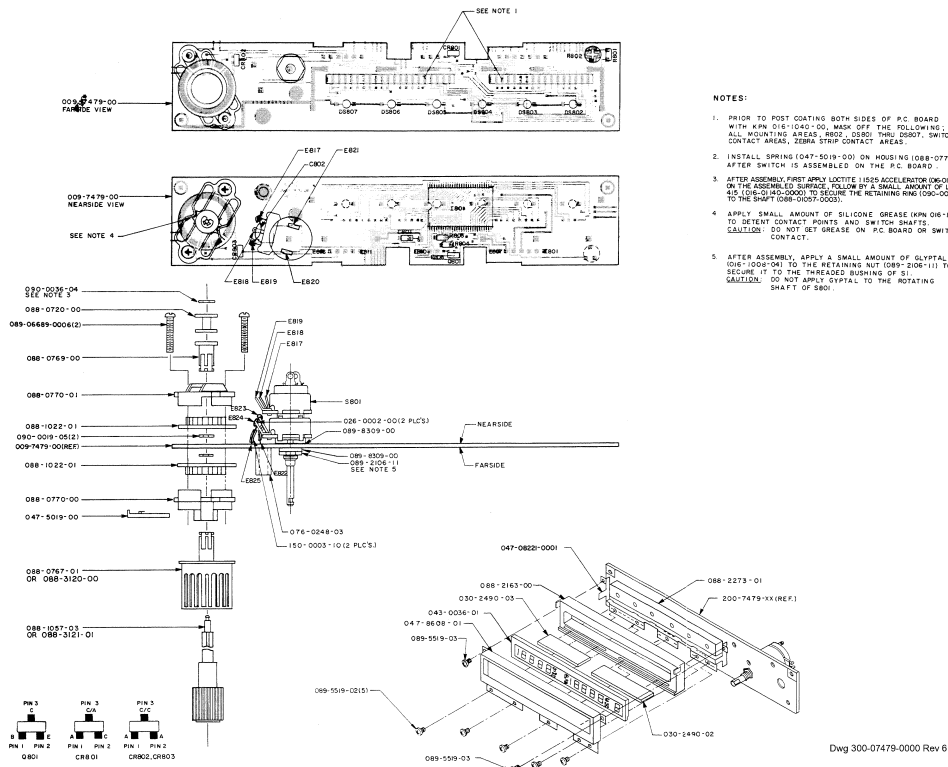


FIGURE 6-7A LCD Display Board Assembly
(Dwg No 300-07479-0000, Rev 6)

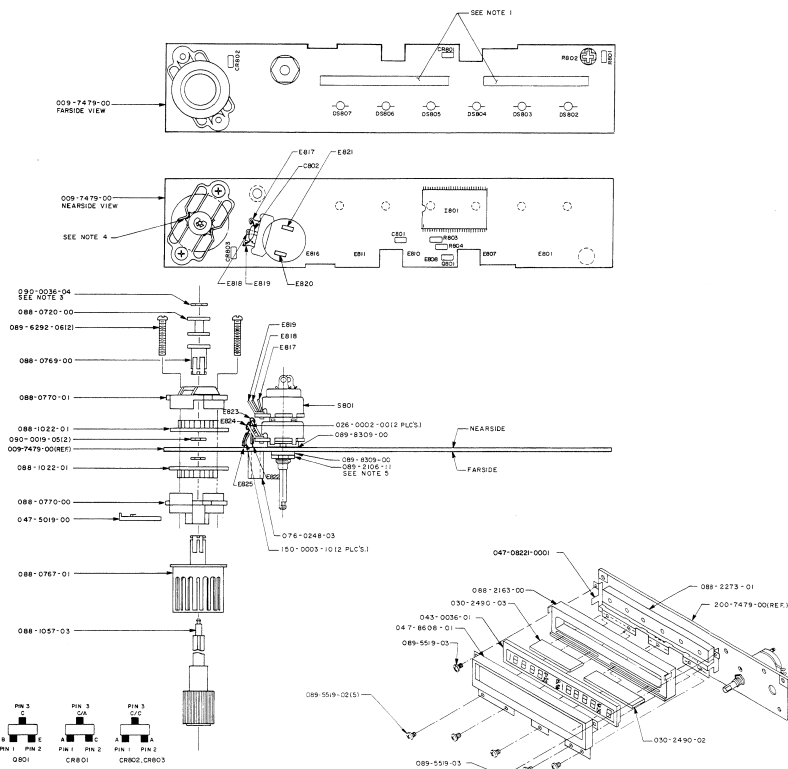


NOTES:

1. PRIOR TO POST COATING BOTH SIDES OF P.C BOARD WITH KRN 016-1040-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS, S801, 0501 THRU 0507, SWITCH CONTACT AREAS, ZEBRA STRIP CONTACT AREAS.
2. INSTALL SPRING (047-5019-00) ON HOUSING (088-0770-00) AFTER SWITCH IS ASSEMBLED ON THE P.C BOARD.
3. AFTER ASSEMBLY, APPLY A SMALL AMOUNT OF EPOXY (016-1125-00) TO THE RETAINING RING (080-0026-04) TO SECURE IT TO THE SHAFT (088-1057-03).
4. APPLY SMALL AMOUNT OF SILICONE GREASE (KRN 016-1013-00) TO DETENT CONTACT POINTS AND SWITCH SHAFTS. **CAUTION:** DO NOT GET GREASE ON P.C BOARD OR SWITCH CONTACT.
5. AFTER ASSEMBLY, APPLY A SMALL AMOUNT OF GLYPTEL (016-1024-04) TO THE RETAINING RING (089-2308-11) TO SECURE IT TO THE THREADED BUSHING OF S1. **CAUTION:** DO NOT APPLY GLYPTEL TO THE ROTATING SHAFT OF S801.

Dwg 300-07479-0000 Rev 3

FIGURE 6-7B LCD Display Board Assembly
(Dwg No 300-07479-0000, Rev 3)

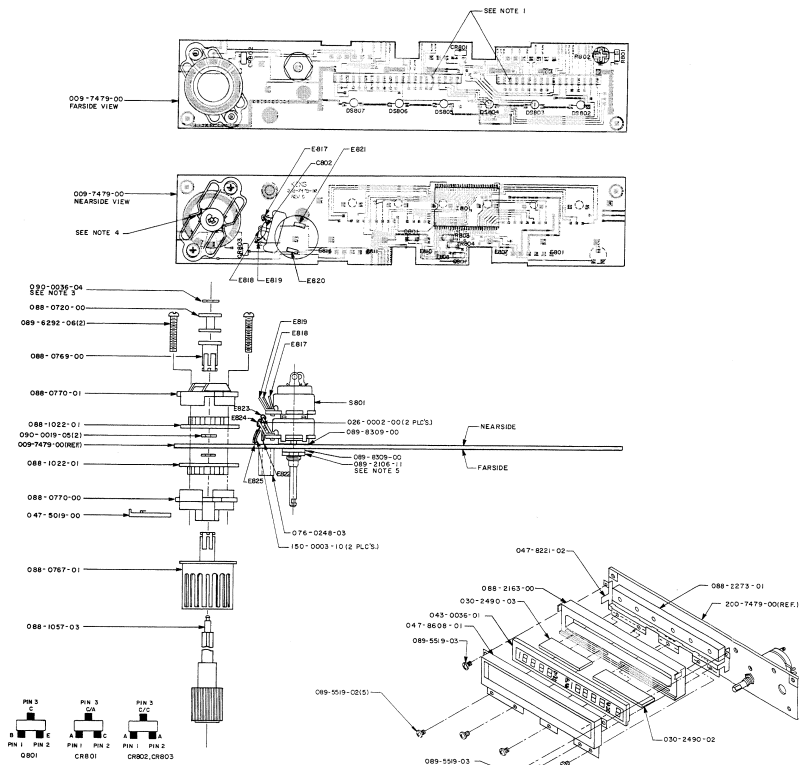

NOTES:

1. PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH KRN 016-1040-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS; 8B22, 05801 THRU 05807, SWITCH CONTACT AREAS; ZONE STRIP CONTACT AREAS.
2. INSTALL SPRING (047-5019-00) ON HOUSING (088-0770-00) AFTER SWITCH IS ASSEMBLED ON THE P.C. BOARD.
3. AFTER ASSEMBLY APPLY A SMALL AMOUNT OF EPOXY (016-1122-00) TO THE RETAINING RING (088-0770-00) TO SECURE IT TO THE SHAFT (088-1022-01).
4. APPLY SMALL AMOUNT OF SILICONE GREASE (KRN 016-1013-00) TO CONTACT POINTS AND SWITCH SHAFTS. CAUTION: DO NOT GET GREASE ON P.C. BOARD OR SWITCH CONTACT.
5. AFTER ASSEMBLY APPLY A SMALL AMOUNT OF GLYPTAL (016-1006-00) TO THE RETAINING NUT (088-2163-01) TO SECURE IT TO THE THREADED BUSHING (016-1013-00). CAUTION: DO NOT APPLY GLYPTAL TO THE ROTATING SHAFT OF 8B01.

Dwg 300-07479-0000 Rev 2

FIGURE 6-7C LCD Display Board Assembly
(Dwg No 300-07479-0000, Rev 2)

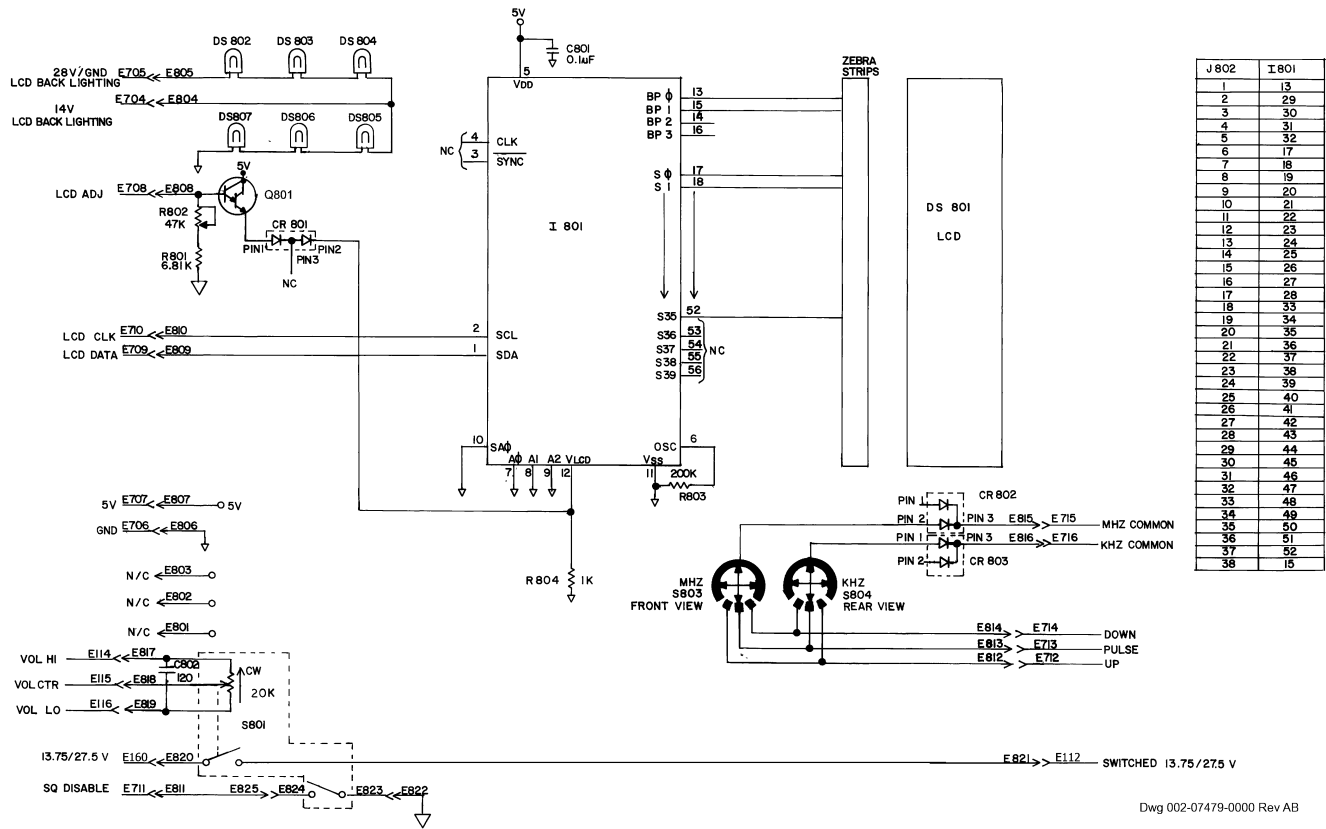


FIGURE 6-8 LCD Display Board Schematic
(Dwg No 002-07479-0000, Rev AB)

Dwg 002-07479-0000 Rev AB

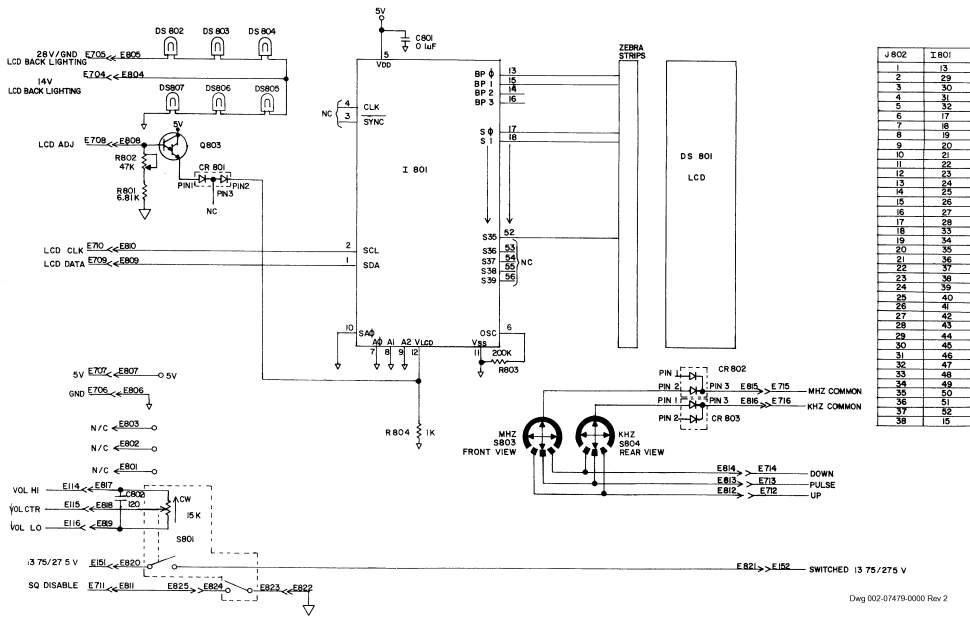


FIGURE 6-8A LCD Display Board Schematic
(Dwg No 002-07479-0000, Rev 2)

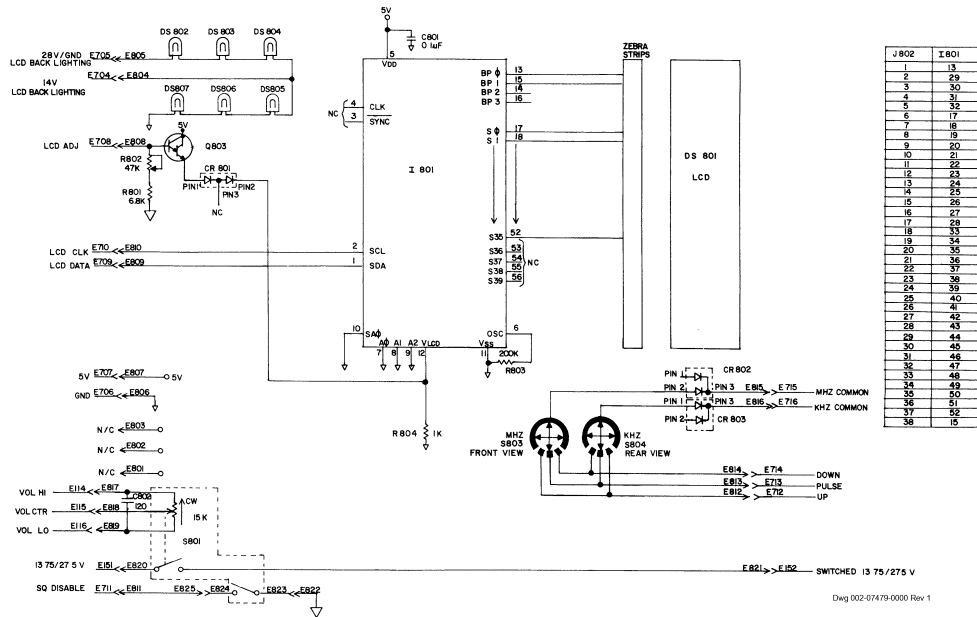


FIGURE 6-8B LCD Display Board Schematic
(Dwg No 002-07479-0000, Rev 1)

6.4.8 Transmitter Board

200-07540-0000 KY97A 14V 5W TX BD REV 4
 200-07540-0001 KY96A 28V 5W TX BD REV 4
 200-07540-0099 KY96A/97A COM TX BD REV AB

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|
| C401 | 113-05102-0000 | | CAP DC .001UF 500V | EA | . | . | 1.00 |
| C402 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | 1.00 |
| C403 | 113-05331-0000 | | CAP DC 330PF 500V | EA | . | . | 1.00 |
| C404 | 113-03121-0000 | | CAP DC 120PF 500V | EA | . | . | 1.00 |
| C405 | 113-05102-0000 | | CAP DC .001UF 500V | EA | . | . | 1.00 |
| C406 | 111-00001-0001 | | CAP CR .1UF 50V | EA | . | . | 1.00 |
| C407 | 096-06105-0052 | | CAP TN 1.0UF50V20% | EA | . | . | 1.00 |
| C408 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | . | 1.00 |
| C409 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | . | 1.00 |
| C410 | 113-03151-0000 | | CAP DC 150PF 500V | EA | . | . | 1.00 |
| C411 | 104-00001-0015 | | CAP SM 10PF 100V | EA | . | . | 1.00 |
| C412 | 104-00001-0009 | | CAP SM 47PF 100V | EA | . | . | 1.00 |
| C413 | 104-00001-0017 | | CAP SM 39PF 100V | EA | . | . | .50 |
| C413 | 104-00001-0031 | | CAP SM 27PF 500V | EA | . | . | .50 |
| C414 | 104-00001-0000 | | CAP SM 100PF 100V | EA | . | . | 1.00 |
| C415 | 104-00001-0014 | | CAP SM 33PF 100V | EA | . | . | 1.00 |
| C416 | 104-00001-0008 | | CAP SM 75PF 100V | EA | . | . | 1.00 |
| C417 | 100-00003-0001 | | 300PF 500V 5% CP | EA | . | . | 1.00 |
| C418 | 102-00024-0010 | | CAP VAR 7-45PF N15 | EA | . | . | 1.00 |
| C419 | 104-00001-0030 | | CAP SM 18PF 500V | EA | . | . | 1.00 |
| C420 | 104-00001-0033 | | CAP SM 15PF 500V | EA | . | . | 1.00 |
| C421 | 104-00001-0030 | | CAP SM 18PF 500V | EA | . | . | 1.00 |
| C422 | 104-00001-0063 | | CAP SM 12PF 100V | EA | . | . | 1.00 |
| C423 | 104-00001-0041 | | CAP SM 22PF 500V | EA | . | . | 1.00 |
| C424 | 106-00074-0036 | | CAP PF 9.1 500VDC | EA | . | . | 1.00 |
| C425 | 106-00074-0033 | | CAP PF 6.8 500VDC | EA | . | . | 1.00 |
| C426 | 104-00001-0041 | | CAP SM 22PF 500V | EA | . | . | 1.00 |
| C427 | 104-00001-0063 | | CAP SM 12PF 100V | EA | . | . | 1.00 |
| C428 | 113-03121-0000 | | CAP DC 120PF 500V | EA | 1.00 | . | . |
| C428 | 113-05102-0000 | | CAP DC .001UF 500V | EA | . | 1.00 | . |
| C429 | 113-05331-0000 | | CAP DC 330PF 500V | EA | . | . | 1.00 |
| C430 | 113-05102-0000 | | CAP DC .001UF 500V | EA | . | . | 1.00 |
| C431 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| C432 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| C433 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| C434 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| C436 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| C437 | 104-00001-0045 | | CAP SM 43PF 100V | EA | . | . | 1.00 |
| C438 | 113-03121-0000 | | CAP DC 120PF 500V | EA | . | . | 1.00 |
| C439 | 113-05331-0000 | | CAP DC 330PF 500V | EA | . | . | 1.00 |
| C440 | 104-00001-0031 | | CAP SM 27PF 500V | EA | . | . | 1.00 |
| C441 | 111-00001-0021 | | CAP CR .0068UF 100 | EA | . | . | 1.00 |
| C442 | 104-00001-0002 | | CAP SM 91PF 100V | EA | . | . | 1.00 |
| C443 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | . | 1.00 |
| C444 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | . | 1.00 |
| C445 | 113-05102-0000 | | CAP DC .001UF 500V | EA | 1.00 | . | . |
| C445 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 | . |
| C446 | 113-05331-0000 | | CAP DC 330PF 500V | EA | . | . | 1.00 |
| C447 | 104-00001-0002 | | CAP SM 91PF 100V | EA | . | . | 1.00 |
| C448 | 104-00001-0009 | | CAP SM 47PF 100V | EA | . | . | 1.00 |
| C449 | 113-03121-0000 | | CAP DC 120PF 500V | EA | . | . | 1.00 |
| CR401 | 007-06099-0000 | | DIO UM9401 | EA | . | . | 1.00 |
| CR402 | 007-06099-0000 | | DIO UM9401 | EA | . | . | 1.00 |
| CR403 | 007-06228-0000 | | RF SWITCHING DIODE | EA | . | . | 1.00 |
| L401 | 013-00006-0001 | | FERR BEAD | EA | . | . | 1.00 |
| L402 | 013-00006-0001 | | FERR BEAD | EA | . | . | 1.00 |
| L403 | 013-00006-0001 | | FERR BEAD | EA | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|
| L404 | 013-00006-0001 | | FERR BEAD | EA | . | . | 1.00 |
| L405 | 013-00006-0001 | | FERR BEAD | EA | . | . | 1.00 |
| L406 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| L407 | 019-02084-0005 | | CH .22UH 10% | EA | . | . | 1.00 |
| L408 | 013-00006-0001 | | FERR BEAD | EA | . | . | 1.00 |
| L409 | 013-00006-0001 | | FERR BEAD | EA | . | . | 1.00 |
| L410 | 019-02084-0001 | | CH .15UH 10% | EA | 1.00 | . | . |
| L410 | 019-02084-0005 | | CH .22UH 10% | EA | . | 1.00 | . |
| L411 | 019-02084-0029 | | CH 2.2UH 10% | EA | . | . | 1.00 |
| L412 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| L413 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| L414 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| L415 | 013-00006-0001 | | FERR BEAD | EA | . | . | 1.00 |
| Q401 | 007-00250-0000 | | XSTR 2N4427 | EA | . | . | 1.00 |
| Q402 | 007-00483-0000 | | XSTR RF, POWER | EA | . | . | 1.00 |
| Q403 | 007-00500-0000 | | XSTR RF 2SC1946A | EA | . | . | 1.00 |
| Q404 | 007-00195-0000 | | XSTR S MPSH10 | EA | . | . | 1.00 |
| R401 | 131-00182-0023 | | RES CF 1.8K QW 5% | EA | . | . | 1.00 |
| R402 | 131-00471-0023 | | RES CF 470 QW 5% | EA | . | . | 1.00 |
| R403 | 131-00300-0033 | | RES CF 30 HW 5% | EA | . | . | 1.00 |
| R404 | 131-00100-0023 | | RES CF 10 QW 5% | EA | . | . | 1.00 |
| R405 | 131-00100-0033 | | RES CF 10 HW 5% | EA | . | . | 1.00 |
| R406 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| R407 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | .00 |
| R408 | 131-00103-0023 | | RES CF 10K QW 5% | EA | . | . | 1.00 |
| R409 | 131-00100-0023 | | RES CF 10 QW 5% | EA | . | . | 1.00 |
| R410 | 139-00511-0000 | | RES CH 51.1 EW 1% | EA | . | . | 1.00 |
| R411 | 130-05101-0043 | | RES CHIP 100 HW | EA | . | . | 1.00 |
| R412 | 130-05101-0043 | | RES CHIP 100 HW | EA | . | . | 1.00 |
| REF1 | 300-07540-0000 | | 5W TRANSMITTER B0A | RF | .00 | . | . |
| REF1 | 300-07540-0001 | | 5W TRANSMITTER B0A | RF | . | .00 | . |
| REF2 | 002-07540-0000 | | SCH 14V TX BD KY 9 | RF | .00 | . | . |
| REF2 | 002-07540-0001 | | SCH KY96A 28V5WTXB | RF | . | .00 | . |
| T401 | 019-03026-0002 | | XFMR TW BIFLR | EA | . | . | 1.00 |
| T402 | 019-03026-0003 | | XFMR TWISTED BIFLR | EA | . | . | 1.00 |
| T403 | 019-03124-0001 | | XFMR BIFILAR RF 4T | EA | . | . | 1.00 |
| | 009-08413-0000 | | KLX135 TX BD 14V | EA | . | . | 1.00 |
| | 012-01127-0001 | | TAG COVER | EA | . | . | 4.00 |
| | 016-01004-0000 | | COMPOUND THRML JNT | AR | . | . | 1.00 |
| | 016-01008-0004 | | GLYPTAL 7526 BL | AR | . | . | 1.00 |
| | 016-01071-0000 | | DC RTV 3140 | AR | . | . | 1.00 |
| | 025-00004-0003 | | WIRE 20 ORN | IN | 10.30 | 10.00 | . |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | 6.00 |
| | 025-00018-0089 | | WIRE 26 GY/WH | IN | . | . | 5.20 |
| | 026-00003-0000 | | WIRE, CU, 22AWG, T | IN | . | . | 1.50 |
| | 026-00004-0000 | | WIRE, CU, 20AWG, T | IN | . | . | 1.00 |
| | 026-00013-0000 | | WIRE, COAX, RG-178 | IN | . | . | 7.00 |
| | 030-00152-0000 | | CONN BNC HEX | EA | . | . | 1.00 |
| | 073-00389-0014 | | TRANSMITTER HOUS | EA | . | . | 1.00 |
| | 089-05901-0004 | | SCR PHP 3-48X1/4 | EA | . | . | 6.00 |
| | 089-05903-0004 | | SCR PHP 4-40X1/4 | EA | . | . | 3.00 |
| | 089-08033-0030 | | WASHER, INTERNAL L | EA | . | . | 1.00 |
| | 090-00133-0001 | | HEATSINK .323 LG | EA | . | . | 1.00 |
| | 091-00028-0000 | | SCREW, BINDER HD, | EA | . | . | 1.00 |
| | 091-00155-0000 | | WASHER MICA | EA | . | . | 1.00 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | 2.00 |
| | 200-07540-0099 | | KY96A/97A COM TXBD | EA | 1.00 | 1.00 | . |


THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

200-07540-0000 KY97A 14V 5W TX BD REV 4 KY 0097A
 200-07540-0001 KY 96A 28V 5W TX B REV 4 KY 0096A
 200-07540-0099 KY96A/97A COM TXBD REV 11 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | |
|--------|----------------|--------------------|---|----|----------|-------|------|
| | | | | | 0000 | 0001 | 0099 |
| | 009-07540-0000 | PC BD 14V TX | | EA | . | . | 1.00 |
| | 016-01004-0000 | COMPOUND THRML JNT | | AR | . | . | 1.00 |
| | 016-01008-0004 | GLYPTAL 7526 BL | | AR | . | . | 1.00 |
| | 016-01071-0000 | DC RTV 3140 | | AR | . | . | 1.00 |
| | 025-00004-0003 | WIRE 20 ORN | | IN | 10.30 | 10.00 | . |
| | 025-00018-0089 | WIRE 26 GY/WH | | IN | . | . | 5.20 |
| | 025-05003-0099 | WIRE 20 WHT | | IN | . | . | 6.50 |
| | 026-00003-0000 | WIRE COP TIN 22G | | IN | . | . | 1.50 |
| | 026-00004-0000 | WIRE COP TIN 20G | | IN | . | . | 1.00 |
| | 026-00013-0000 | CA COAX RG-178BU | | IN | . | . | 7.00 |
| | 030-00152-0000 | CONN BNC HEX | | EA | . | . | 1.00 |
| | 073-00389-0014 | TRANSMITTER HOUS | A | EA | . | . | 1.00 |
| | 089-05901-0004 | SCR PHP 3-48X1/4 | | EA | . | . | 6.00 |
| | 089-05903-0004 | SCR PHP 4-40X1/4 | | EA | . | . | 3.00 |
| | 089-08033-0030 | WSHR INTL LK .391 | | EA | . | . | 1.00 |
| | 090-00133-0001 | HEATSINK .323 LG | | EA | . | . | 1.00 |
| | 091-00028-0000 | SCR BHS 4-40X.187 | | EA | . | . | 1.00 |
| | 091-00155-0000 | WASHER MICA | | EA | . | . | 1.00 |
| | 150-00005-0010 | TUBING TFLN 20AWG | | IN | . | . | 1.25 |
| | 150-00042-0010 | SHRINK TUBING .187 | | IN | . | . | 0.50 |
| | 150-00103-0000 | SLDR SLEEVE | | EA | . | . | 2.00 |
| | 200-07540-0099 | KY96A/97A COM TXBD | A | EA | 1.00 | 1.00 | . |
| C | 401 | 113-05102-0000 | | EA | . | . | 1.00 |
| C | 402 | 097-00104-0036 | | EA | . | . | 1.00 |
| C | 403 | 113-05331-0000 | | EA | . | . | 1.00 |
| C | 404 | 113-03121-0000 | | EA | . | . | 1.00 |
| C | 405 | 113-05102-0000 | | EA | . | . | 1.00 |
| C | 406 | 111-00001-0001 | | EA | . | . | 1.00 |
| C | 407 | 096-01006-0000 | | EA | . | . | 1.00 |
| C | 408 | 106-04331-0026 | | EA | . | . | 1.00 |
| C | 409 | 106-04331-0026 | | EA | . | . | 1.00 |
| C | 410 | 113-03151-0000 | | EA | . | . | 1.00 |
| C | 411 | 104-00001-0015 | | EA | . | . | 1.00 |
| C | 412 | 104-00001-0009 | | EA | . | . | 1.00 |
| C | 413 | 104-00001-0017 | | EA | . | . | 1.00 |
| C | 414 | 104-00001-0000 | | EA | . | . | 1.00 |
| C | 415 | 104-00001-0014 | | EA | . | . | 1.00 |
| C | 416 | 104-00001-0008 | | EA | . | . | 1.00 |
| C | 417 | 100-00003-0001 | | EA | . | . | 1.00 |
| C | 418 | 102-00024-0009 | | EA | . | . | 1.00 |
| C | 419 | 104-00001-0030 | | EA | . | . | 1.00 |
| C | 420 | 104-00001-0033 | | EA | . | . | 1.00 |
| C | 421 | 104-00001-0030 | | EA | . | . | 1.00 |
| C | 422 | 104-00001-0063 | | EA | . | . | 1.00 |
| C | 423 | 104-00001-0041 | | EA | . | . | 1.00 |
| C | 424 | 106-00001-0042 | | EA | . | . | 1.00 |
| C | 425 | 106-00001-0034 | | EA | . | . | 1.00 |
| C | 426 | 104-00001-0041 | | EA | . | . | 1.00 |
| C | 427 | 104-00001-0063 | | EA | . | . | 1.00 |
| C | 428 | 113-03121-0000 | | EA | 1.00 | . | . |
| C | 428 | 113-05102-0000 | | EA | . | 1.00 | . |
| C | 429 | 113-05331-0000 | | EA | . | . | 1.00 |
| C | 430 | 113-05102-0000 | | EA | . | . | 1.00 |
| C | 431 | 999-09999-0098 | | RF | . | . | X. |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | |
|--------|-------------|----------------|--------------------|----|----------|------|------|
| | | | | | 0000 | 0001 | 0099 |
| C | 432 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| C | 433 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| C | 434 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| C | 436 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| C | 437 | 104-00001-0045 | CAP SM 43PF 100V | EA | . | . | 1.00 |
| C | 438 | 113-03121-0000 | CAP DC 120PF 500V | EA | . | . | 1.00 |
| C | 439 | 113-05331-0000 | CAP DC 330PF 500V | EA | . | . | 1.00 |
| C | 440 | 104-00001-0031 | CAP SM 27PF 500V | EA | . | . | 1.00 |
| C | 441 | 111-00001-0021 | CAP CR .0068UF 100 | EA | . | . | 1.00 |
| C | 442 | 104-00001-0002 | CAP SM 91PF 100V | EA | . | . | 1.00 |
| C | 443 | 106-04331-0026 | CAPCH330PFNPO/100V | EA | . | . | 1.00 |
| C | 444 | 106-04331-0026 | CAPCH330PFNPO/100V | EA | . | . | 1.00 |
| C | 445 | 113-05102-0000 | CAP DC .001UF 500V | EA | 1.00 | . | . |
| C | 445 | 999-09999-0098 | NOT USED | RF | . | X. | . |
| C | 446 | 113-05331-0000 | CAP DC 330PF 500V | EA | . | . | 1.00 |
| C | 447 | 104-00001-0002 | CAP SM 91PF 100V | EA | . | . | 1.00 |
| C | 448 | 104-00001-0009 | CAP SM 47PF 100V | EA | . | . | 1.00 |
| C | 449 | 113-03121-0000 | CAP DC 120PF 500V | EA | . | . | 1.00 |
| CR | 401 | 007-06099-0000 | DIO UM9401 | EA | . | . | 1.00 |
| CR | 402 | 007-06099-0000 | DIO UM9401 | EA | . | . | 1.00 |
| CR | 403 | 007-06228-0000 | RF SWITCHING DIODE | EA | . | . | 1.00 |
| L | 401 | 013-00006-0001 | FERR BEAD | EA | . | . | 1.00 |
| L | 402 | 013-00006-0001 | FERR BEAD | EA | . | . | 1.00 |
| L | 403 | 013-00006-0001 | FERR BEAD | EA | . | . | 1.00 |
| L | 404 | 013-00006-0001 | FERR BEAD | EA | . | . | 1.00 |
| L | 405 | 013-00006-0001 | FERR BEAD | EA | . | . | 1.00 |
| L | 406 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| L | 407 | 019-02084-0005 | CH .22UH 10% | EA | . | . | 1.00 |
| L | 408 | 013-00006-0001 | FERR BEAD | EA | . | . | 1.00 |
| L | 409 | 013-00006-0001 | FERR BEAD | EA | . | . | 1.00 |
| L | 410 | 019-02084-0001 | CH .15UH 10% | EA | 1.00 | . | . |
| L | 410 | 019-02084-0005 | CH .22UH 10% | EA | . | 1.00 | . |
| L | 411 | 019-02084-0029 | CH 2.2UH 10% | EA | . | . | 1.00 |
| L | 412 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| L | 413 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| L | 414 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| Q | 401 | 007-00250-0000 | XSTR 2N4427 | EA | . | . | 1.00 |
| Q | 402 | 007-00483-0000 | XSTR RF SD1574-1 | EA | . | . | 1.00 |
| Q | 403 | 007-00500-0000 | XSTR RF 2SC1946A | EA | . | . | 1.00 |
| Q | 404 | 007-00195-0000 | XSTR S MPSH10 | EA | . | . | 1.00 |
| R | 401 | 131-00182-0023 | RES CF 1.8K QW 5% | EA | . | . | 1.00 |
| R | 402 | 131-00471-0023 | RES CF 470 QW 5% | EA | . | . | 1.00 |
| R | 403 | 131-00300-0033 | RES CF 30 HW 5% | EA | . | . | 1.00 |
| R | 404 | 131-00100-0023 | RES CF 10 QW 5% | EA | . | . | 1.00 |
| R | 405 | 131-00100-0033 | RES CF 10 HW 5% | EA | . | . | 1.00 |
| R | 406 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| R | 407 | 999-09999-0098 | NOT USED | RF | . | . | X. |
| R | 408 | 131-00103-0023 | RES CF 10K QW 5% | EA | . | . | 1.00 |
| R | 409 | 131-00100-0023 | RES CF 10 QW 5% | EA | . | . | 1.00 |
| R | 410 | 139-00511-0000 | RES CH 51.1 EW 1% | EA | . | . | 1.00 |
| R | 411 | 130-05101-0043 | RES CHIP 100 HW | EA | . | . | 1.00 |
| R | 412 | 130-05101-0043 | RES CHIP 100 HW | EA | . | . | 1.00 |
| REF | 1 | 300-07540-0000 | 14V TX BD ASSY | RF | X. | . | . |
| REF | 1 | 300-07540-0001 | KY 96A 28V 5W TX B | RF | . | X. | . |
| REF | 2 | 002-07540-0000 | SCH 14V TX BD | RF | X. | . | . |
| REF | 2 | 002-07540-0001 | SCH KY96A 28V5WTXB | RF | . | X. | . |
| T | 401 | 019-03026-0002 | XFMR TW BIFLR | EA | . | . | 1.00 |
| T | 402 | 019-03026-0003 | XFMR TWISTED BIFLR | EA | . | . | 1.00 |
| T | 403 | 019-03124-0001 | XFMR BIFILAR RF 4T | EA | . | . | 1.00 |

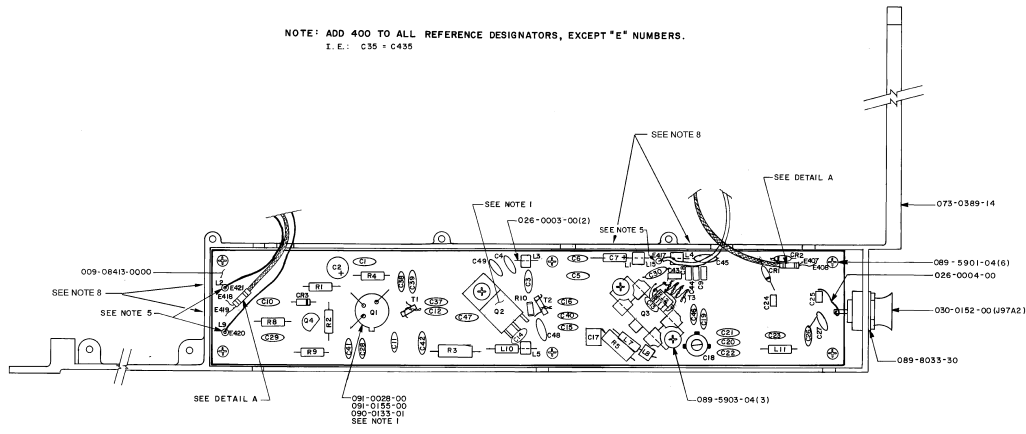


NOTE: ADD 400 TO ALL REFERENCE DESIGNATORS, EXCEPT "E" NUMBERS.
I. E.: C35 - C43A

NOTES:

1. APPLY THERMAL COMPOUND (016-1004-00) TO BACK SIDE OF TRANSISTORS Q2 AND Q5 ONLY AND TO BACK SIDE OF HEATSINK. ON Q1 ADD THERMAL COMPOUND TO TRANSISTOR CASE AND THE SCREW SIDE OF THE HEATSINK. Q1, Q2, Q5 ARE TO BE INSTALLED AFTER THEY ARE MOUNTED IN THE CASTINGS.
2. KEEP WINDINGS OF T3 AS CLOSE AS POSSIBLE TO EACH OTHER AND KEEP LEAD LENGTHS AS SHORT AS POSSIBLE.
3. ALL LEAD LENGTHS MUST BE AS SHORT AS POSSIBLE. SOLDER JOINTS ON ALL GARRITOR LEADS SHOULD EXTEND ALL THE WAY TO THE BODY OF THE CAPACITOR WHERE POSSIBLE.
4. ENTIRE ASSY MUST BE ESPECIALLY CLEAN AND FREE OF FLUX DEPOSITS.
5. SECURE BEAD TO BOARD WITH RTV (016-1071-00).
7. C413 IS A TEST SELECT VALUE.
8. PLACE STICKER 012-01127-0001 OVER HOLE IN CASTING AT INDICATED POSITION.

| WIRING CHART | | | | |
|--------------|-------|----------------|--------|-----------|
| FROM | TO | PART NUMBER | LENGTH | TOLERANCE |
| E 417 | E 117 | 025-00005-0002 | 6.00" | MAX |
| E 418 | E 118 | 026-0013-00 | 4.75 | MAX |
| E 419 | E 119 | 026-0013-00 | 4.75 | MAX |
| E 407 | E 107 | 026-0013-00 | 2.25 | MAX |
| E 408 | E 108 | 026-0013-00 | 2.25 | MAX |
| E 420 | E 120 | 025-0018-89 | 5.20 | + 5 % |
| E 421 | E 121 | 025-0004-03 | 10.30 | + 5 % |
| E 423 | E 123 | NOT USED | | |

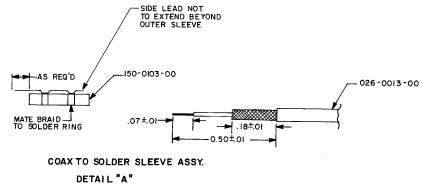


REF B/M: 200-7540-00

Dwg 300-07540-0000 Rev AA

FIGURE 6-9 KY 97A (14V) Transmitter Board Assembly
(Dwg No 300-07540-0000, Rev AA)


NOTE: ADD 400 TO ALL REFERENCE DESIGNATORS, EXCEPT "E" NUMBERS.
 I. E. C35 = C435

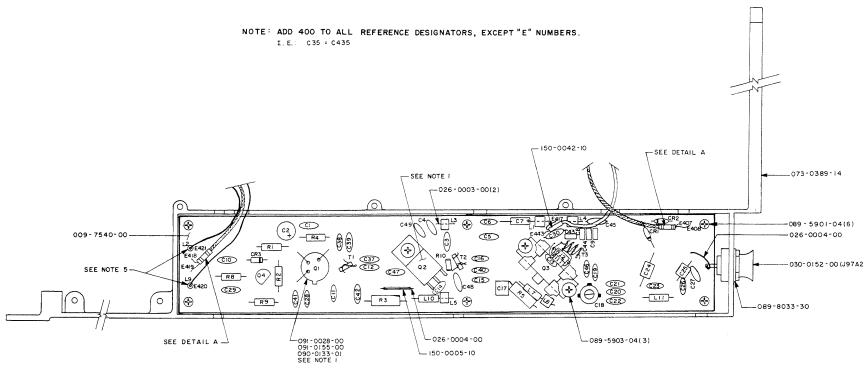

NOTES:


1. APPLY THERMAL COMPOUND (016-1004-00) TO BACK SIDE OF TRANSISTORS Q2 AND Q3 ONLY AND TO BACK SIDE OF HEATSIK ON Q1. ADD THERMAL COMPOUND TO TRANSISTOR CASE AND THE SCREW SIDE OF THE HEATSIK. Q1, Q2, Q3 ARE TO BE INSTALLED AFTER THEY ARE MOUNTED IN THE CASTINGS.
2. KEEP WINDINGS OF T3 AS CLOSE AS POSSIBLE TO EACH OTHER AND KEEP LEAD LENGTHS AS SHORT AS POSSIBLE.
3. ALL LEAD LENGTHS MUST BE AS SHORT AS POSSIBLE. SOLDER JOINTS ON ALL CAPACITOR LEADS SHOULD EXTEND ALL THE WAY TO THE BODY OF THE CAPACITOR WHERE POSSIBLE.
4. ENTIRE ASSY MUST BE ESPECIALLY CLEAN AND FREE OF FLUX DEPOSITS.
5. SECURE BEAD TO BOARD WITH RTV(016-1071-00).

| WIRING CHART | | | | |
|--------------|-------|-------------|--------|-----------|
| FROM | TO | PART NUMBER | LENGTH | TOLERANCE |
| E 417 | E 117 | 025-1000-99 | 6.50 | MAX |
| E 443 | E 117 | 025-1000-99 | 6.50 | MAX |
| E 416 | E 118 | 026-0013-00 | 4.75 | MAX |
| E 415 | E 119 | 026-0013-00 | 4.75 | MAX |
| E 407 | E 107 | 026-0013-00 | 2.25 | MAX |
| E 408 | E 108 | 026-0013-00 | 2.25 | MAX |
| E 420 | E 120 | 025-0018-89 | 5.20 | ± 5% |
| E 421 | E 121 | 025-0004-03 | 10.30 | ± 5% |
| E 423 | E 123 | NOT USED | | |

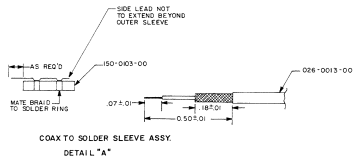


Dwg 300-07540-0000 Rev 6

FIGURE 6-9A KY 97A (14V) Transmitter Board Assembly
 (Dwg No 300-07540-0000, Rev 6)

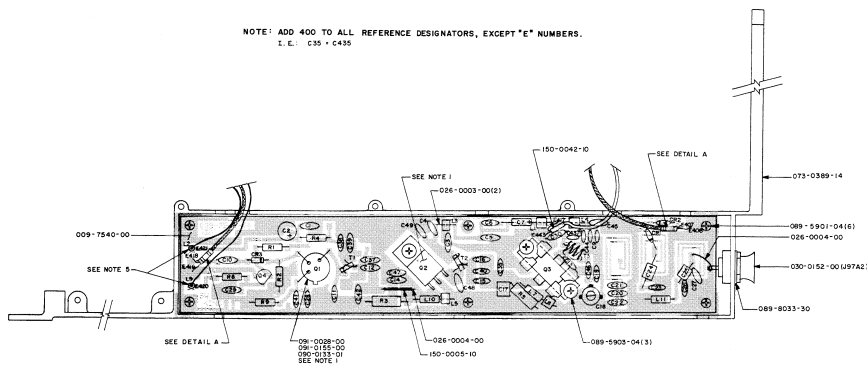

- NOTES:**
1. APPLY THERMAL COMPOUND (06-1004-00) TO BACK SIDE OF TRANSISTORS Q2 AND Q3 ONLY AND TO BACK SIDE OF HEATINK. DO NOT ADD THERMAL COMPOUND TO TRANSISTOR CASE AND THE SCREW SIDE OF THE HEATINK. Q1, Q2, Q3 ARE TO BE INSTALLED AFTER THEY ARE MOUNTED IN THE CASTINGS.
 2. KEEP WINDINGS OF T3 AS CLOSE AS POSSIBLE TO EACH OTHER AND WSP LEAD LENGTHS AS SHORT AS POSSIBLE.
 3. ALL LEAD LENGTHS MUST BE AS SHORT AS POSSIBLE. SOLDER JOINTS ON ALL CAPACITOR LEADS SHOULD EXTEND ALG. THE WAX TO THE BODY OF THE CAPACITOR WHERE POSSIBLE.
 4. ENTIRE ASSY MUST BE ESPECIALLY CLEAN AND FREE OF FLUX DEPOSITS.
 5. SECURE BEAD TO BOARD WITH RTV (016-1071-00).

| WIRING CHART | | | | |
|--------------|------|-------------|--------|-----------|
| FROM | TO | PART NUMBER | LENGTH | TOLERANCE |
| E117 | E117 | 025-5003-99 | 6.50 | MAX |
| E118 | E118 | 026-0013-00 | 4.75 | MAX |
| E407 | E107 | 026-0013-00 | 2.25 | MAX |
| E408 | E108 | 026-0013-00 | 2.25 | MAX |
| E420 | E120 | 025-0018-89 | 5.20 | + 5% |
| E421 | E121 | 025-0004-03 | 10.30 | + 5% |
| E423 | E123 | NOT USED | | |



Dwg 300-07540-0000 Rev 3

FIGURE 6-9B KY 97A (14V) Transmitter Board Assembly
(Dwg No 300-07540-0000, Rev 3)

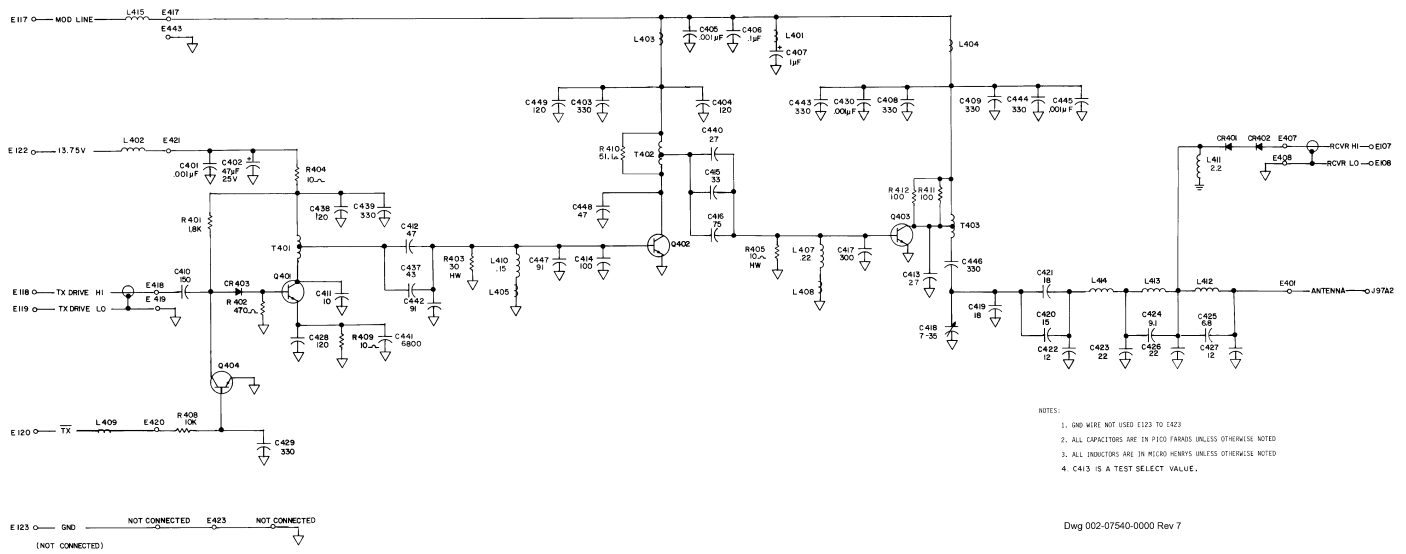


FIGURE 6-10 KY 97A (14V) Transmitter Board Schematic
(Dwg No 002-07540-0000, Rev 7)

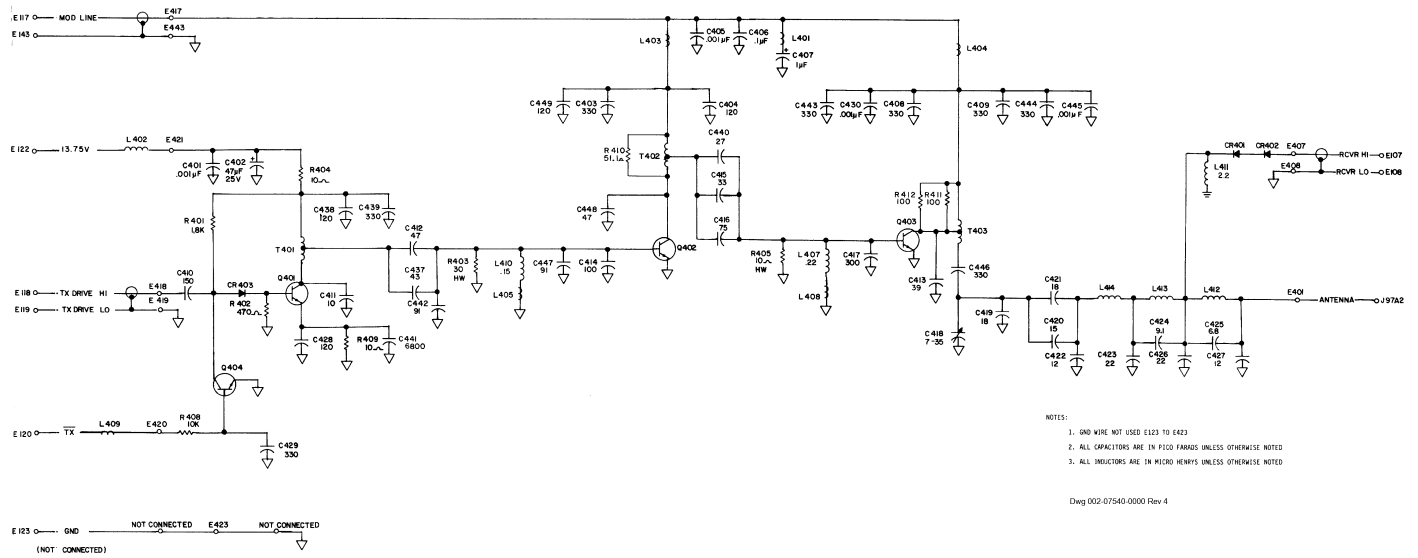


FIGURE 6-10A KY 97A (14V) Transmitter Board Schematic
(Dwg No 002-07540-0000, Rev 4)


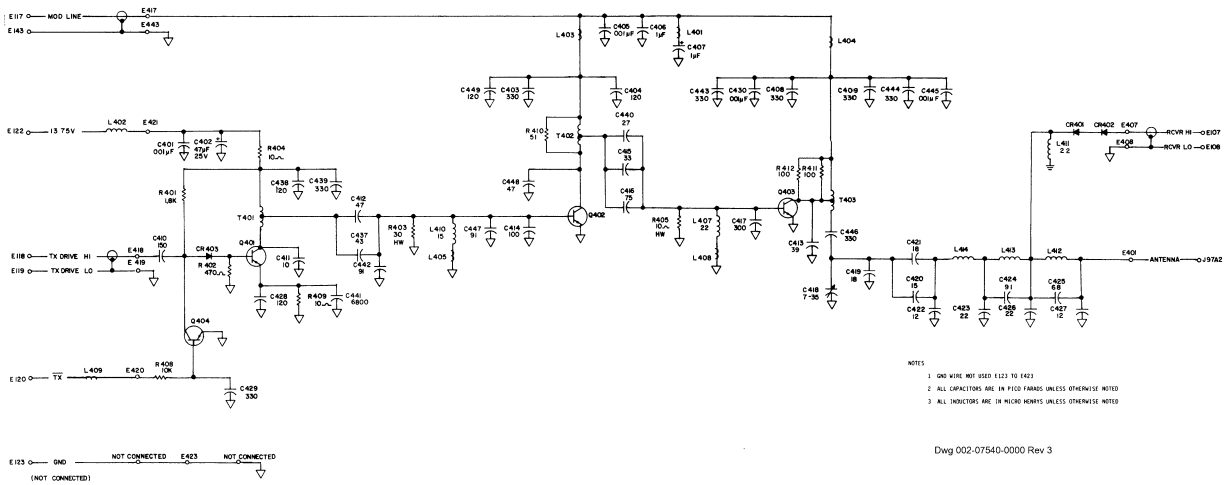



FIGURE 6-10B KY 97A (14V) Transmitter Board Schematic (Dwg No 002-07540-0000, Rev 3)

NOTE: ADD 400 TO ALL REFERENCE DESIGNATORS, EXCEPT "E" NUMBERS.
I. E.: C35 • C435

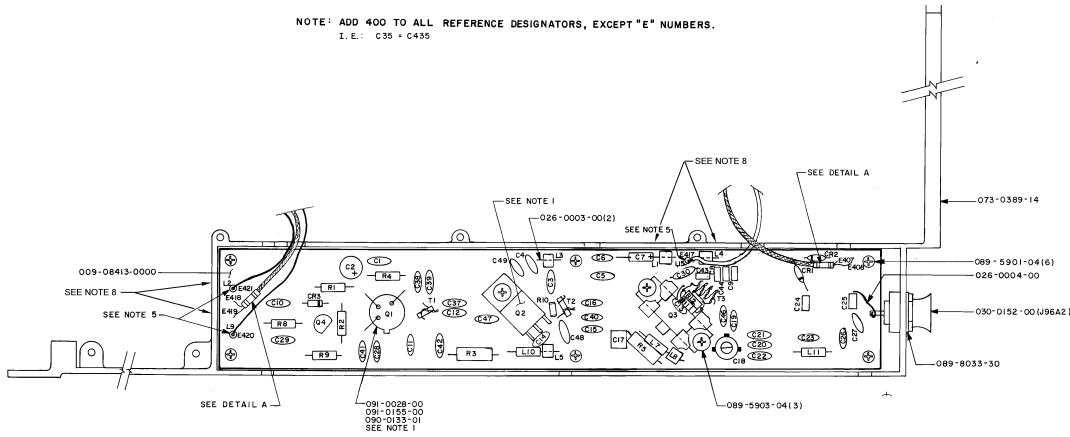

NOTES:

1. APPLY THERMAL COMPOUND (016-1004-00) TO BACK SIDE OF TRANSISTORS Q2 AND Q3 ONLY AND TO BACK SIDE OF HEATSINK. ON Q1 ADD THERMAL COMPOUND TO TRANSISTOR CASE AND THE SCREW SIDE OF THE HEATSINK. Q1, Q2, Q3 ARE TO BE INSTALLED AFTER THEY ARE MOUNTED IN THE CASTINGS.
2. KEEP WINDINGS OF T3 AS CLOSE AS POSSIBLE TO EACH OTHER AND KEEP LEAD LENGTHS AS SHORT AS POSSIBLE.
3. ALL LEAD LENGTHS MUST BE AS SHORT AS POSSIBLE. SOLDER JOINTS ON ALL CAPACITOR LEADS SHOULD EXTEND ALL THE WAY TO THE BODY OF THE CAPACITOR WHERE POSSIBLE.
4. ENTIRE ASSY MUST BE ESPECIALLY CLEAN AND FREE OF FLUX DEPOSITS.
5. SECURE BEAD TO BOARD WITH RTV (016-1071-00).
6. C413 IS A TEST SELECT VALUE.
7. PLACE STICKER 012-0127-0001 OVER HOLE IN CASTING AT INDICATED POSITION.

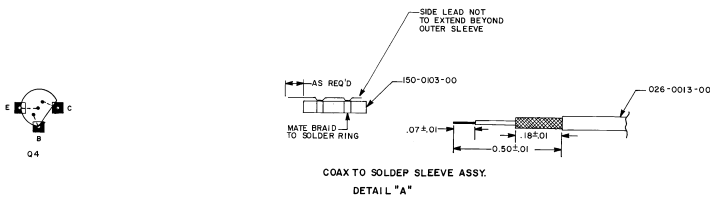


| WIRING CHART | | | | |
|-------------------------|----------------|----------------|--------|-----------|
| FROM | TO | PART NUMBER | LENGTH | TOLERANCE |
| E 417 E 443 | E 117 | 025-00005-0002 | 6.00" | MAX |
| E 418 E 419 E 408 | E 118 E 119 | 026-0013-00 | 4.75 | MAX |
| E 407 E 408 | E 107 E 108 | 026-0013-00 | 2.25 | MAX |
| E 420 | E 120 | 025-0018-89 | 5.20 | ± 5% |
| E 421 | E 122 | 025-0004-03 | 10.00 | ± 5% |
| E 423 | E 123 | NOT USED | | |

Dwg 300-07540-0001 Rev AA

REF. B/M: 200-7540-01


FIGURE 6-11 KY 96A (28V) Transmitter Board Assembly
(Dwg No 300-07540-0001, Rev AA)

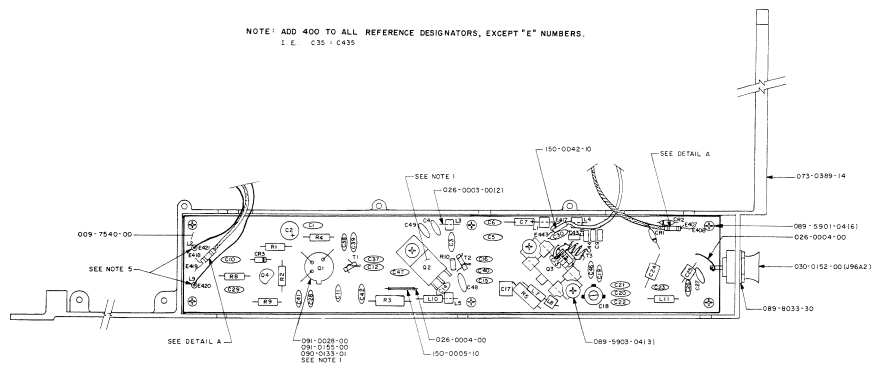

NOTE: ADD 400 TO ALL REFERENCE DESIGNATORS, EXCEPT "E" NUMBERS.
 1. C. C35, C43D

- NOTES:**
1. APPLY THERMAL COMPOUND (016-1004-00) TO BACK SIDE OF TRANSISTORS Q2 AND Q3 ONLY AND TO BACK SIDE OF HEATSINK. ON Q1 ADD THERMAL COMPOUND TO TRANSISTOR CASE AND THE SCREW SIDE OF THE HEATSINK. Q1, Q2, Q3 ARE TO BE INSTALLED AFTER THEY ARE MOUNTED IN THE CASTINGS.
 2. KEEP WINDINGS OF T3 AS CLOSE AS POSSIBLE TO EACH OTHER AND KEEP LEAD LENGTHS AS SHORT AS POSSIBLE.
 3. ALL LEAD LENGTHS MUST BE AS SHORT AS POSSIBLE. SOLDER JOINTS ON ALL CAPACITOR LEADS SHOULD EXTEND ALL THE WAY TO THE BODY OF THE CAPACITOR WHERE POSSIBLE.
 4. ENTIRE ASSY MUST BE ESPECIALLY CLEAN AND FREE OF FLUX DEPOSITS.
 5. SECURE BEAD TO BOARD WITH RTV (016-1071-00).


| WIRING CHART | | | | |
|----------------|----------------|-------------|--------|-----------|
| FROM | TO | PART NUMBER | LENGTH | TOLERANCE |
| E 417 E 443 | E 117 | 025-5003-99 | 6.50 | MAX |
| E 410 E 410 | E 118 E 119 | 026-0015-00 | 4.75 | MAX |
| E 407 E 409 | E 107 E 108 | 026-0013-00 | 2.25 | MAX |
| E 420 | E 120 | 025-0018-89 | 5.00 | + 5% |
| E 42 | E 122 | 025-0004-03 | 10.00 | + 5% |
| E 421 | E 123 | NOT USED | | |

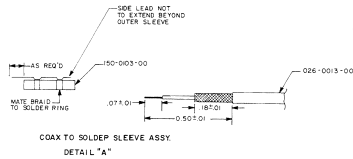

Dwg 300-07540-0001 Rev 6


**FIGURE 6-11A KY 96A (28V) Transmitter Board Assembly
 (Dwg No 300-07540-0001, Rev 6)**

NOTE: ADD 400 TO ALL REFERENCE DESIGNATORS, EXCEPT "E" NUMBERS.
 I. E. C35 + C45

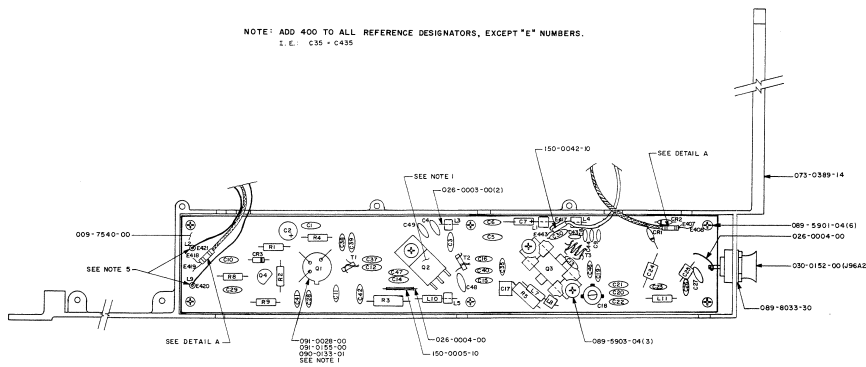


- NOTES:**
1. APPLY THERMAL COMPOUND (016-1004-00) TO BACK SIDE OF TRANSISTORS Q2 AND Q3 ONLY AND TO BACK SIDE OF HEATSINK. ON Q1 ADD THERMAL COMPOUND TO TRANSISTOR CASE AND THE SCREW SIDE OF THE HEATSINK. Q1, Q2, Q3 ARE TO BE INSTALLED AFTER THEY ARE MOUNTED IN THE CASTINGS.
 2. KEEP WINDINGS OF T3 AS CLOSE AS POSSIBLE TO EACH OTHER AND KEEP LEAD LENGTHS AS SHORT AS POSSIBLE.
 3. ALL LEAD LENGTHS MUST BE AS SHORT AS POSSIBLE. SOLDER JOINTS ON ALL CAPACITOR LEADS SHOULD EXTEND ALL THE WAY TO THE BODY OF THE CAPACITOR WHERE POSSIBLE.
 4. ENTIRE ASSY MUST BE ESPECIALLY CLEAN AND FREE OF FLUX DEPOSITS.
 5. SECURE BEAD TO BOARD WITH RTV (016-1071-00).

| WIRING CHART | | | | |
|--------------|------|-------------|--------|-----------|
| FROM | TO | PART NUMBER | LENGTH | TOLERANCE |
| E417 | E117 | 025-5003-99 | 6.50 | MAX |
| E443 | | | | |
| E418 | E118 | 026-0013-00 | 4.75 | MAX |
| E419 | E119 | 026-0013-00 | 2.25 | MAX |
| E407 | E107 | 026-0013-00 | 2.25 | MAX |
| E408 | E108 | 026-0013-00 | 2.25 | MAX |
| E420 | E120 | 025-0018-89 | 5.20 | ± 5% |
| E421 | E122 | 025-0004-03 | 10.00 | ± 5% |
| E423 | E123 | NOT USED | | |

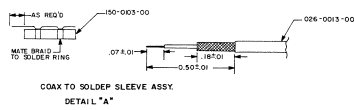

Dwg 300-07540-0001 Rev 3

FIGURE 6-11B KY 96A (28V) Transmitter Board Assembly (Dwg No 300-07540-0001, Rev 3)

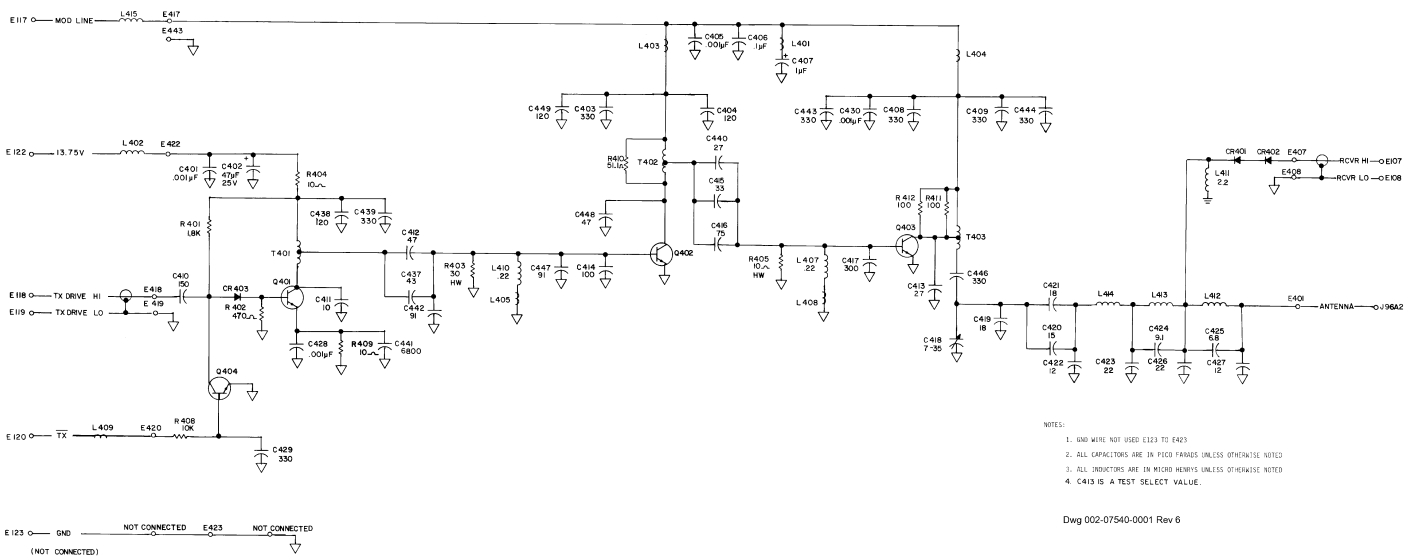

- NOTES:
- 1. 0Ω WIRE NOT USED: E123 TO E423
 - 2. ALL CAPACITORS ARE IN PICO FARADS UNLESS OTHERWISE NOTED
 - 3. ALL INDUCTORS ARE IN MICRO HENRYS UNLESS OTHERWISE NOTED
 - 4. C413 IS A TEST SELECT VALUE.

Dwg 002-07540-0001 Rev 6

FIGURE 6-12 KY 96A (28V) Transmitter Board Schematic (Dwg No 002-07540-0001, Rev 6)

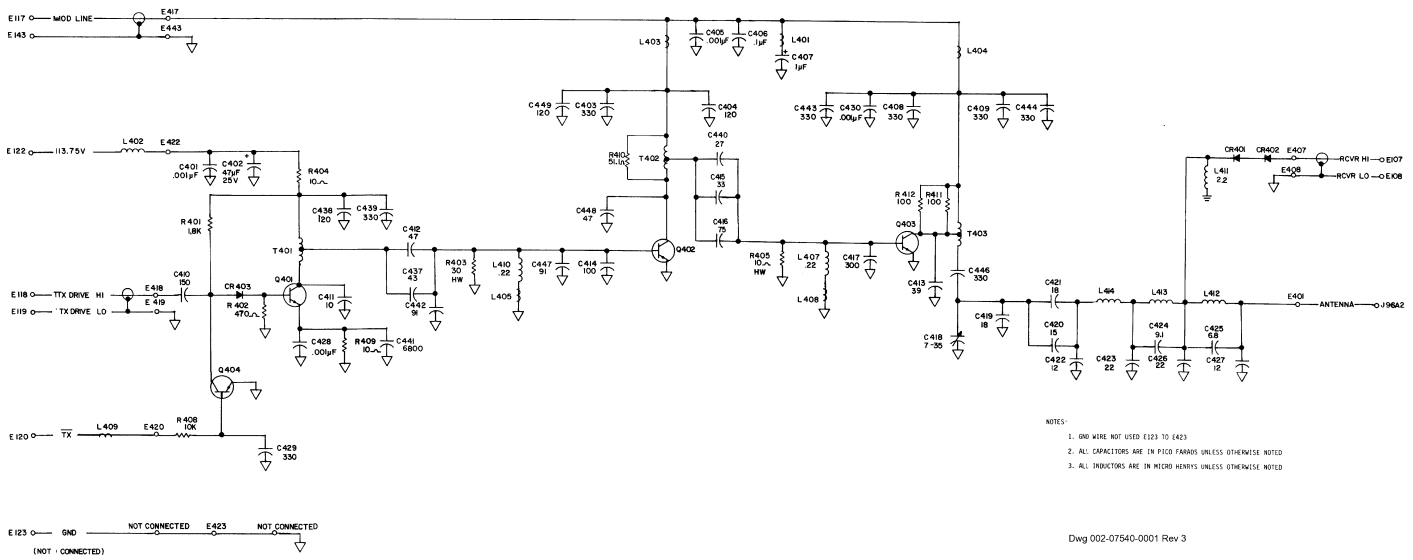


FIGURE 6-12A KY 96A (28V) Transmitter Board Schematic (Dwg No 002-07540-0001, Rev 3)


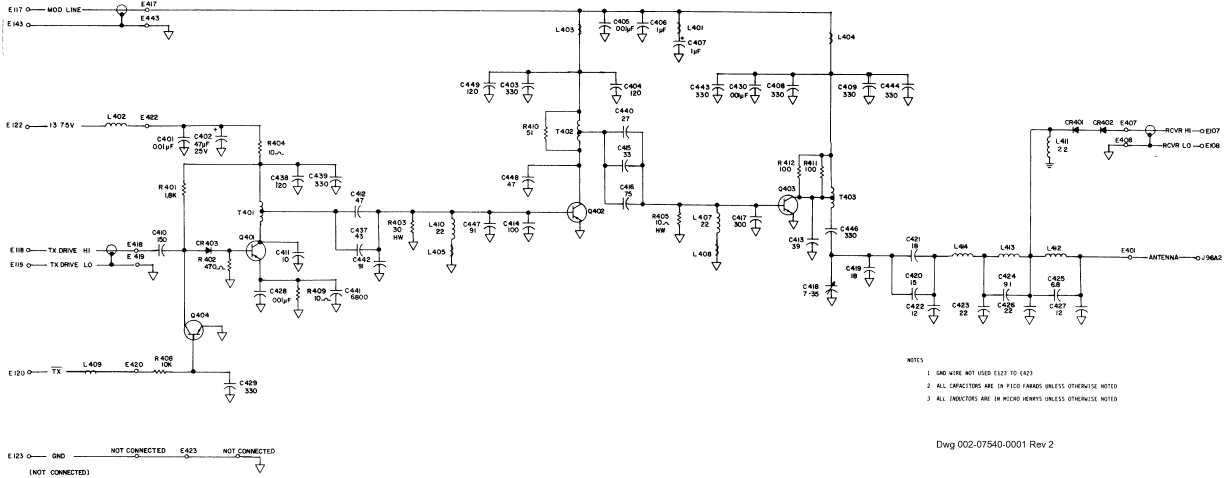


FIGURE 6-12B KY 96A (28V) Transmitter Board Schematic
(Dwg No 002-07540-0001, Rev 2)

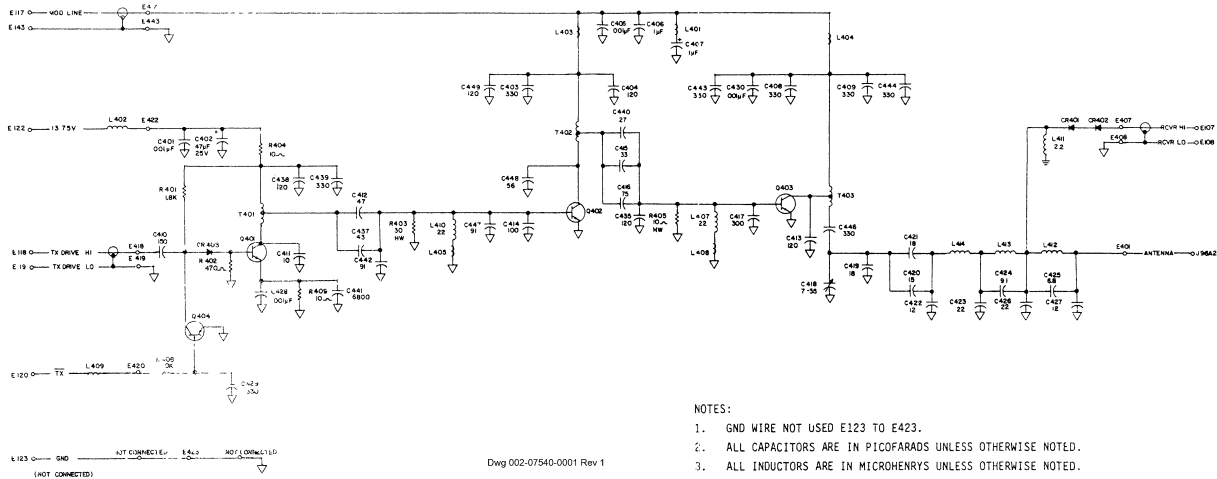

- NOTES:
1. GND WIRE NOT USED E123 TO E423.
 2. ALL CAPACITORS ARE IN PICOFARADS UNLESS OTHERWISE NOTED.
 3. ALL INDUCTORS ARE IN MICROHENRYS UNLESS OTHERWISE NOTED.

FIGURE 6-12C KY 96A (28V) Transmitter Board Schematic
(Dwg No 002-07540-0001, Rev 1)

6.4.9 Audio Amplifier Board

200-07797-0000 AUDIO AMP BOARD

REV 9

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 |
|--------|----------------|---------|---------------------|----|-------|
| C1201 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | 1.00 |
| C1202 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | 1.00 |
| C1203 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | 1.00 |
| C1204 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | 1.00 |
| C1205 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | 1.00 |
| C1206 | 097-00108-0015 | | CAP EL 10UF 35V | EA | 1.00 |
| C1207 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 |
| C1208 | 999-09999-0096 | | RESERVED | RF | .00 |
| C1209 | 999-09999-0096 | | RESERVED | RF | .00 |
| C1210 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | 1.00 |
| C1211 | 097-00108-0007 | | CAP EL 10UF 16V | EA | 1.00 |
| C1212 | 097-00108-0013 | | CAP EL 33UF | EA | 1.00 |
| C1213 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | 1.00 |
| C1214 | 106-04471-0026 | | CH 470PF NPO/100V | EA | 1.00 |
| C1215 | 097-00108-0014 | | CAP EL 4.7UF 35V | EA | 1.00 |
| C1216 | 097-00108-0015 | | CAP EL 10UF 35V | EA | 1.00 |
| C1217 | 097-00108-0013 | | CAP EL 33UF | EA | 1.00 |
| C1218 | 106-04471-0026 | | CH 470PF NPO/100V | EA | 1.00 |
| C1219 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 |
| C1220 | 106-04222-0057 | | CAPCH2200PFX7R/100 | EA | 1.00 |
| C1221 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | 1.00 |
| C1222 | 097-00108-0007 | | CAP EL 10UF 16V | EA | 1.00 |
| C1223 | 097-00108-0008 | | CAP EL 22UF | EA | 1.00 |
| C1224 | 097-00108-0008 | | CAP EL 22UF | EA | 1.00 |
| C1225 | 097-00149-0002 | | 470UF 50V EL CAP | EA | 1.00 |
| C1226 | 999-09999-0098 | | PLACE HOLDER | RF | .00 |
| C1227 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 |
| C1228 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 |
| CR1201 | 007-05117-0015 | | DIO Z 13V SOT | EA | 1.00 |
| CR1202 | 007-06222-0000 | | DIO DAN202K | EA | 1.00 |
| CR1203 | 007-06033-0000 | | DIO G 1N270 | EA | 1.00 |
| CR1204 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | 1.00 |
| CR1205 | 007-06222-0000 | | DIO DAN202K | EA | 1.00 |
| CR1206 | 007-06222-0000 | | DIO DAN202K | EA | 1.00 |
| F1201 | 036-00057-0008 | | FUSE 275 125V 3A | EA | 1.00 |
| I1201 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | 1.00 |
| P1201 | 155-02499-0000 | | AUDIO CABLE ASSY | EA | 1.00 |
| Q1201 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | 1.00 |
| Q1202 | 007-00535-0000 | | XSTR JFET MMBF4393 | EA | 1.00 |
| Q1203 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | 1.00 |
| Q1204 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | 1.00 |
| Q1205 | 007-00078-0001 | | XSTR S NPN 2N3417 | EA | 1.00 |
| Q1206 | 007-00238-0000 | | XSTR S PNP FPN4917 | EA | 1.00 |
| Q1207 | 007-00930-0000 | | XSTR S PNP MJE15029 | EA | 1.00 |
| Q1208 | 007-00525-0000 | | XSTR PWR MJE15028 | EA | 1.00 |
| R1201 | 139-05110-0000 | | RES CH 511 EW 1% | EA | 1.00 |
| R1202 | 139-05110-0000 | | RES CH 511 EW 1% | EA | 1.00 |
| R1203 | 139-05110-0000 | | RES CH 511 EW 1% | EA | 1.00 |
| R1204 | 139-01622-0000 | | RES CH 16.2K EW 1% | EA | 1.00 |
| R1205 | 139-01622-0000 | | RES CH 16.2K EW 1% | EA | 1.00 |
| R1206 | 139-01622-0000 | | RES CH 16.2K EW 1% | EA | 1.00 |
| R1207 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | 1.00 |
| R1208 | 999-09999-0096 | | RESERVED | RF | .00 |
| R1209 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 |
| R1210 | 139-01301-0000 | | RES CH 1.30K EW 1% | EA | 1.00 |
| R1211 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | 1.00 |
| R1212 | 139-09092-0000 | | RES CHIP 90.9KEW1% | EA | 1.00 |
| R1213 | 139-05110-0000 | | RES CH 511 EW 1% | EA | 1.00 |
| R1214 | 139-05112-0000 | | RES CHIP 51.1K 1% | EA | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 |
|--------|----------------|---------|--------------------|----|-------|
| R1215 | 139-02742-0000 | | RES CHIP 27.4KEW1% | EA | 1.00 |
| R1216 | 139-04320-0000 | | RES CH 432 EW 1% | EA | 1.00 |
| R1217 | 139-06811-0000 | | RES CH 6.81K EW 1% | EA | 1.00 |
| R1218 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | 1.00 |
| R1219 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | 1.00 |
| R1220 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | 1.00 |
| R1221 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | 1.00 |
| R1222 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | 1.00 |
| R1223 | 139-02210-0000 | | RES CH 221 EW 1% | EA | 1.00 |
| R1224 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | 1.00 |
| R1225 | 139-01301-0000 | | RES CH 1.30K EW 1% | EA | 1.00 |
| R1226 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | 1.00 |
| R1227 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | 1.00 |
| R1228 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | 1.00 |
| R1229 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | 1.00 |
| R1230 | 139-04750-0000 | | RES CH 475 EW 1% | EA | 1.00 |
| R1231 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | 1.00 |
| R1232 | 132-05051-0000 | | RES WW .15 2W 5% | EA | 1.00 |
| R1233 | 132-05051-0000 | | RES WW .15 2W 5% | EA | 1.00 |
| R1234 | 139-04750-0000 | | RES CH 475 EW 1% | EA | 1.00 |
| R1235 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | 1.00 |
| R1236 | 139-04750-0000 | | RES CH 475 EW 1% | EA | 1.00 |
| R1237 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | 1.00 |
| R1238 | 132-00106-0035 | | RES WW 22 2.25W 5% | EA | 1.00 |
| | 008-00038-0001 | | TERM BIFUR .084L | EA | 2.00 |
| | 009-07797-0000 | | AUDIO AMP BOARD | EA | 1.00 |
| | 016-01040-0000 | | COATING TYPE AR | AR | 1.00 |
| | 047-08604-0002 | | HEATSINK AUDIO BD | EA | 1.00 |
| | 076-00741-0008 | | STANDOFF .050 | EA | 3.00 |
| | 089-02140-0000 | | NUT LOCK 4-40 | EA | 4.00 |
| | 091-00109-0000 | | CABLE TIE | EA | 2.00 |
| | 091-00156-0000 | | BUSHING | EA | 2.00 |
| | 091-00606-0000 | | INSULATOR XSTR SIL | EA | 2.00 |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.






200-07797-0000 AUDIO AMP BOARD REV B KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY 0000 |
|--------|---------------------|--------------------|---|----|------------------|
| | 008-00038-0001 | TERM BIFUR .084L | | EA | 2.00 |
| | 009-07797-0000 | AUDIO AMP BOARD | | EA | 1.00 |
| | 016-01040-0000 | COATING TYPE AR | | AR | 1.00 |
| | 047-08604-0002 | HEATSINK AUDIO BD | A | EA | 1.00 |
| | 076-00741-0008 | STANDOFF .050 | | EA | 3.00 |
| | 089-02140-0000 | NUT LOCK 4-40 | | EA | 4.00 |
| | 091-00109-0000 | CABLE TIE .234 | | EA | 2.00 |
| | 091-00156-0000 | BUSHING | | EA | 2.00 |
| | 091-00286-0002 | INSUL XSTR .687 | | EA | 2.00 |
| C | 1201 106-04121-0026 | CAPCH120PFNPO/100V | | EA | 1.00 |
| C | 1202 106-04121-0026 | CAPCH120PFNPO/100V | | EA | 1.00 |
| C | 1203 106-04121-0026 | CAPCH120PFNPO/100V | | EA | 1.00 |
| C | 1204 106-04121-0026 | CAPCH120PFNPO/100V | | EA | 1.00 |
| C | 1205 106-04121-0026 | CAPCH120PFNPO/100V | | EA | 1.00 |
| C | 1206 097-00108-0015 | CAP EL 10UF 35V | | EA | 1.00 |
| C | 1207 106-04103-0057 | CAP CH 10KX7R/100V | | EA | 1.00 |
| C | 1208 999-09999-0096 | RESERVED | | RF | X. |
| C | 1209 999-09999-0096 | RESERVED | | RF | X. |
| C | 1210 097-00108-0021 | CAP EL 1.0UF 50V | | EA | 1.00 |
| C | 1211 097-00108-0007 | CAP EL 10UF 16V | | EA | 1.00 |
| C | 1212 097-00108-0013 | CAP EL 33UF | | EA | 1.00 |
| C | 1213 097-00108-0021 | CAP EL 1.0UF 50V | | EA | 1.00 |
| C | 1214 106-04471-0026 | CH 470PF NPO/100V | | EA | 1.00 |
| C | 1215 097-00108-0014 | CAP EL 4.7UF 35V | | EA | 1.00 |
| C | 1216 097-00108-0015 | CAP EL 10UF 35V | | EA | 1.00 |
| C | 1217 097-00108-0013 | CAP EL 33UF | | EA | 1.00 |
| C | 1218 106-04471-0026 | CH 470PF NPO/100V | | EA | 1.00 |
| C | 1219 106-04103-0057 | CAP CH 10KX7R/100V | | EA | 1.00 |
| C | 1220 106-04222-0057 | CAPCH2200PFX7R/100 | | EA | 1.00 |
| C | 1221 106-04102-0026 | CH 1KPF NPO/100V | | EA | 1.00 |
| C | 1222 097-00108-0007 | CAP EL 10UF 16V | | EA | 1.00 |
| C | 1223 097-00108-0008 | CAP EL 22UF | | EA | 1.00 |
| C | 1224 097-00108-0008 | CAP EL 22UF | | EA | 1.00 |
| C | 1225 097-00149-0002 | 470UF 50V EL CAP | | EA | 1.00 |
| C | 1226 999-09999-0098 | NOT USED | | RF | X. |
| C | 1227 106-04103-0057 | CAP CH 10KX7R/100V | | EA | 1.00 |
| C | 1228 106-04103-0057 | CAP CH 10KX7R/100V | | EA | 1.00 |
| CR | 1201 007-05117-0015 | DIO Z 13V SOT | | EA | 1.00 |
| CR | 1202 007-06222-0000 | DIO DAN202K | | EA | 1.00 |
| CR | 1203 007-06033-0000 | DIO G 1N270 | | EA | 1.00 |
| CR | 1204 007-06223-0000 | DIO DA204K | | EA | 1.00 |
| CR | 1205 007-06222-0000 | DIO DAN202K | | EA | 1.00 |
| CR | 1206 007-06222-0000 | DIO DAN202K | | EA | 1.00 |
| F | 1201 036-00057-0008 | FUSE 275 125V 3A | | EA | 1.00 |
| I | 1201 120-03053-0009 | LM358D DUAL OP AMP | | EA | 1.00 |
| P | 1201 155-02499-0000 | AUDIO CABLE ASSY | | EA | 1.00 |
| Q | 1201 007-00467-0000 | XSTR S NPN MMBTA06 | | EA | 1.00 |
| Q | 1202 007-00535-0000 | XSTR JFET MMBF4393 | | EA | 1.00 |
| Q | 1203 007-00187-0002 | XSTR SOT-23 2N5089 | | EA | 1.00 |
| Q | 1204 007-00187-0002 | XSTR SOT-23 2N5089 | | EA | 1.00 |
| Q | 1205 007-00078-0001 | XSTR S NPN 2N3417 | | EA | 1.00 |
| Q | 1206 007-00238-0000 | XSTR S PNP FPN4917 | | EA | 1.00 |
| Q | 1207 007-00930-0000 | XSTR S PNP MJ15029 | | EA | 1.00 |
| Q | 1208 007-00525-0000 | XSTR PWR MJE15028 | | EA | 1.00 |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY 0000 |
|--------|----------------|--------------------|----|----|------------------|
| R 1201 | 139-05110-0000 | RES CH 511 EW 1% | EA | | 1.00 |
| R 1202 | 139-05110-0000 | RES CH 511 EW 1% | EA | | 1.00 |
| R 1203 | 139-05110-0000 | RES CH 511 EW 1% | EA | | 1.00 |
| R 1204 | 139-01622-0000 | RES CH 16.2K EW 1% | EA | | 1.00 |
| R 1205 | 139-01622-0000 | RES CH 16.2K EW 1% | EA | | 1.00 |
| R 1206 | 139-01622-0000 | RES CH 16.2K EW 1% | EA | | 1.00 |
| R 1207 | 139-02001-0000 | RES CHIP 2K EW 1% | EA | | 1.00 |
| R 1208 | 999-09999-0096 | RESERVED | RF | X. | |
| R 1209 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | | 1.00 |
| R 1210 | 139-01301-0000 | RES CH 1.30K EW 1% | EA | | 1.00 |
| R 1211 | 139-01003-0000 | RES CHIP 100KEW1% | EA | | 1.00 |
| R 1212 | 139-09092-0000 | RES CHIP 90.9KEW1% | EA | | 1.00 |
| R 1213 | 139-05110-0000 | RES CH 511 EW 1% | EA | | 1.00 |
| R 1214 | 139-05112-0000 | RES CHIP 51.1K 1% | EA | | 1.00 |
| R 1215 | 139-02742-0000 | RES CHIP 27.4KEW1% | EA | | 1.00 |
| R 1216 | 139-04320-0000 | RES CH 432 EW 1% | EA | | 1.00 |
| R 1217 | 139-06811-0000 | RES CH 6.81K EW 1% | EA | | 1.00 |
| R 1218 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | | 1.00 |
| R 1219 | 139-01003-0000 | RES CHIP 100KEW1% | EA | | 1.00 |
| R 1220 | 139-02001-0000 | RES CHIP 2K EW 1% | EA | | 1.00 |
| R 1221 | 139-02001-0000 | RES CHIP 2K EW 1% | EA | | 1.00 |
| R 1222 | 139-03010-0000 | RES CHIP 301 EW 1% | EA | | 1.00 |
| R 1223 | 139-02210-0000 | RES CH 221 EW 1% | EA | | 1.00 |
| R 1224 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | | 1.00 |
| R 1225 | 139-01301-0000 | RES CH 1.30K EW 1% | EA | | 1.00 |
| R 1226 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | | 1.00 |
| R 1227 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | | 1.00 |
| R 1228 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | | 1.00 |
| R 1229 | 139-03011-0000 | RES CH 3.01K EW 1% | EA | | 1.00 |
| R 1230 | 139-04750-0000 | RES CH 475 EW 1% | EA | | 1.00 |
| R 1231 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | | 1.00 |
| R 1232 | 132-05051-0000 | RES WW .15 2W 5% | EA | | 1.00 |
| R 1233 | 132-05051-0000 | RES WW .15 2W 5% | EA | | 1.00 |
| R 1234 | 139-04750-0000 | RES CH 475 EW 1% | EA | | 1.00 |
| R 1235 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | | 1.00 |
| R 1236 | 139-04750-0000 | RES CH 475 EW 1% | EA | | 1.00 |
| R 1237 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | | 1.00 |
| R 1238 | 132-00106-0035 | RES WW 22 2.25W 5% | EA | | 1.00 |

NOTE: ADD 1200 TO ALL REFERENCE DESIGNATORS, EXCEPT PI201.
I.E. R2 + R1202

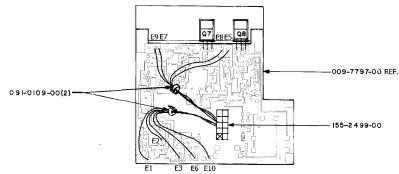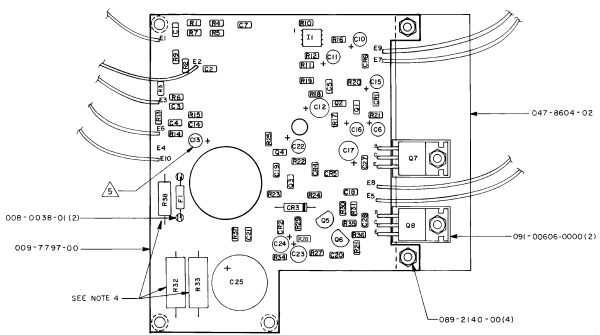



| FROM | TO | COLOR |
|-------------|---------|--------|
| PI201 PIN 1 | PLUGGED | --- |
| PIN 2 | E1 | YELLOW |
| PIN 3 | E2 | GREEN |
| PIN 4 | E3 | VIOLET |
| PIN 5 | E8 | RED |
| PIN 6 | E7 | GRAY |
| PIN 7 | E6 | WHITE |
| PIN 8 | E9 | BROWN |
| PIN 9 | E10 | ORANGE |
| PIN 10 | E5 | BLACK |

Dwg 300-7797-0000 Rev AB

NOTES:




1. PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH KPR 016-1040-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS, Q7, Q8, HEATSINK 047-8604-02, FL.
2. PI201 CONNECTS TO JDI1 OF MAIN BOARD ASSEMBLY 200-7759-XX.
3. MAINTAIN MAXIMUM LEAD TRIM OF 0.030 INCHES.
4. R32, R33, AND R38 TO BE INSTALLED WITH A CLEARANCE BETWEEN COMPONENT BODY AND P.C. BOARD.



REF. B/M: 200-7797-00

FIGURE 6-13 Audio Amplifier Board Assembly
(Dwg No 300-7797-0000, Rev AB)


NOTE: ADD 1200 TO ALL REFERENCE DESIGNATORS, EXCEPT PI201.
 I.E. R2 = R1202

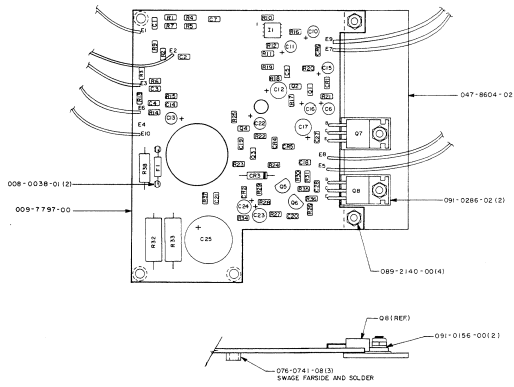

| FROM | TO | COLOR |
|-------------|---------|--------|
| PI201 PIN 1 | PLUGGED | --- |
| PIN 2 | E1 | YELLOW |
| PIN 3 | E2 | GREEN |
| PIN 4 | E3 | VIOLET |
| PIN 5 | E4 | RED |
| PIN 5 | E7 | GRAY |
| PIN 7 | E5 | WHITE |
| PIN 8 | E9 | BROWN |
| PIN 9 | E10 | ORANGE |
| PIN 10 | E5 | BLACK |

NOTES:

1. PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH KRN 016-12640-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS, Q7, Q8, HEATSINK 047-8604-02.
2. PI201 CONNECTS TO J101 OF MAIN BOARD ASSEMBLY 300-7799-KX.
3. MAINTAIN MAXIMUM LEAD TRIM OF 0.030 INCHES.



Dwg 300-07797-0000 Rev 2

FIGURE 6-13A Audio Amplifier Board Assembly
 (Dwg No 300-07797-0000, Rev 2)

COMPONENT DESIGNATORS ARE 1200 SERIES

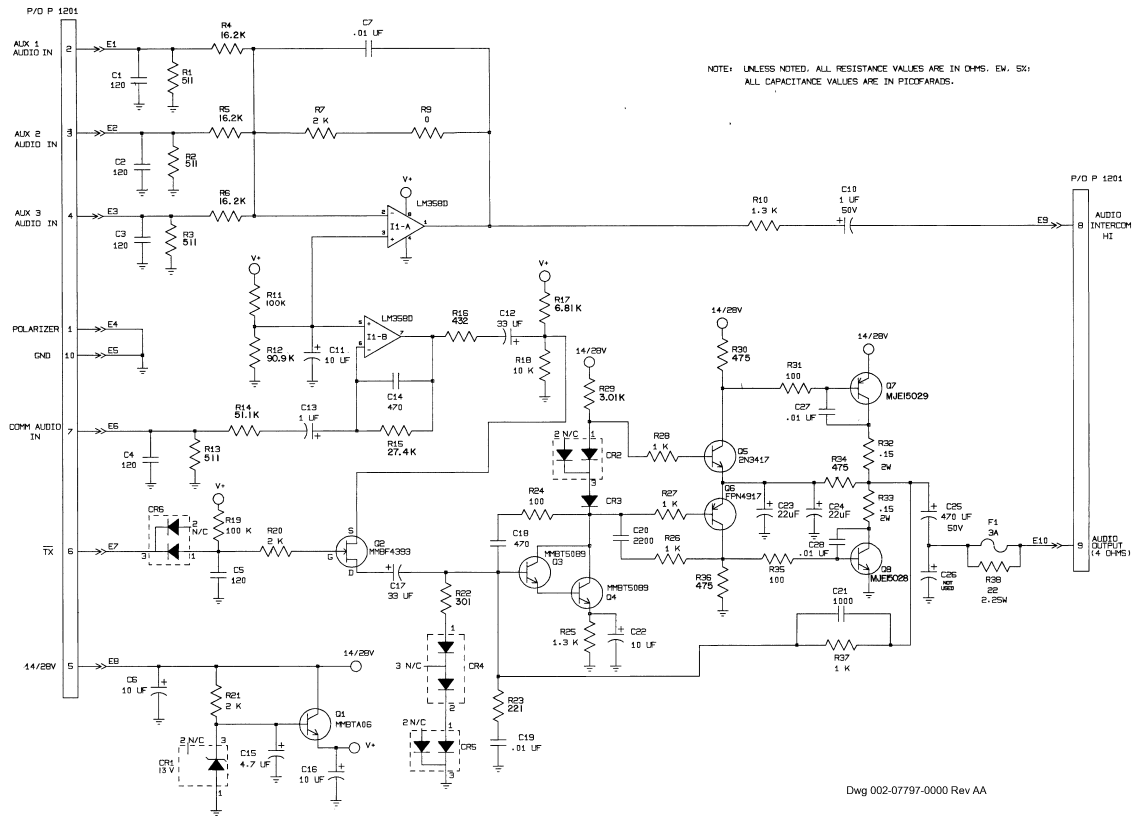


FIGURE 6-14 Audio Amplifier Board Schematic
(Dwg No 002-07797-0000, Rev AA)

COMPONENT DESIGNATORS ARE 1200 SERIES

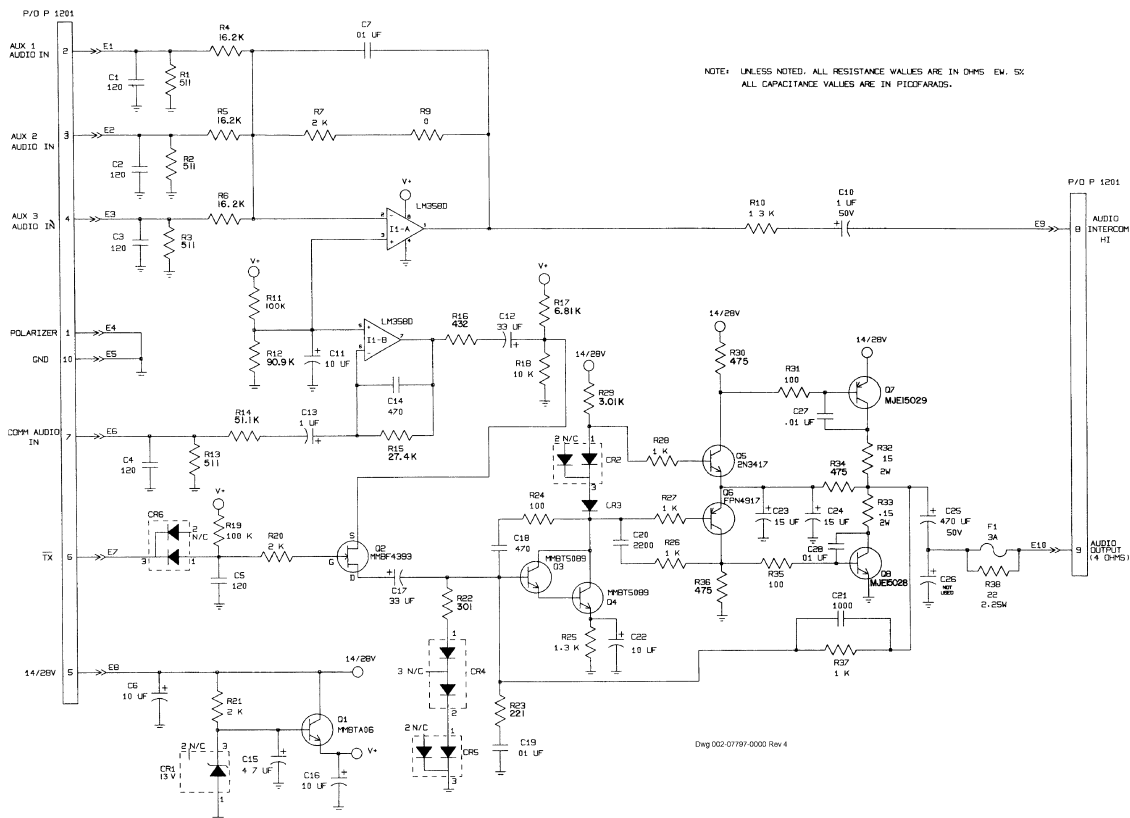


FIGURE 6-14A Audio Amplifier Board Schematic (Dwg No 002-07797-0000, Rev 4)

COMPONENT DESIGNATORS ARE 1200 SERIES

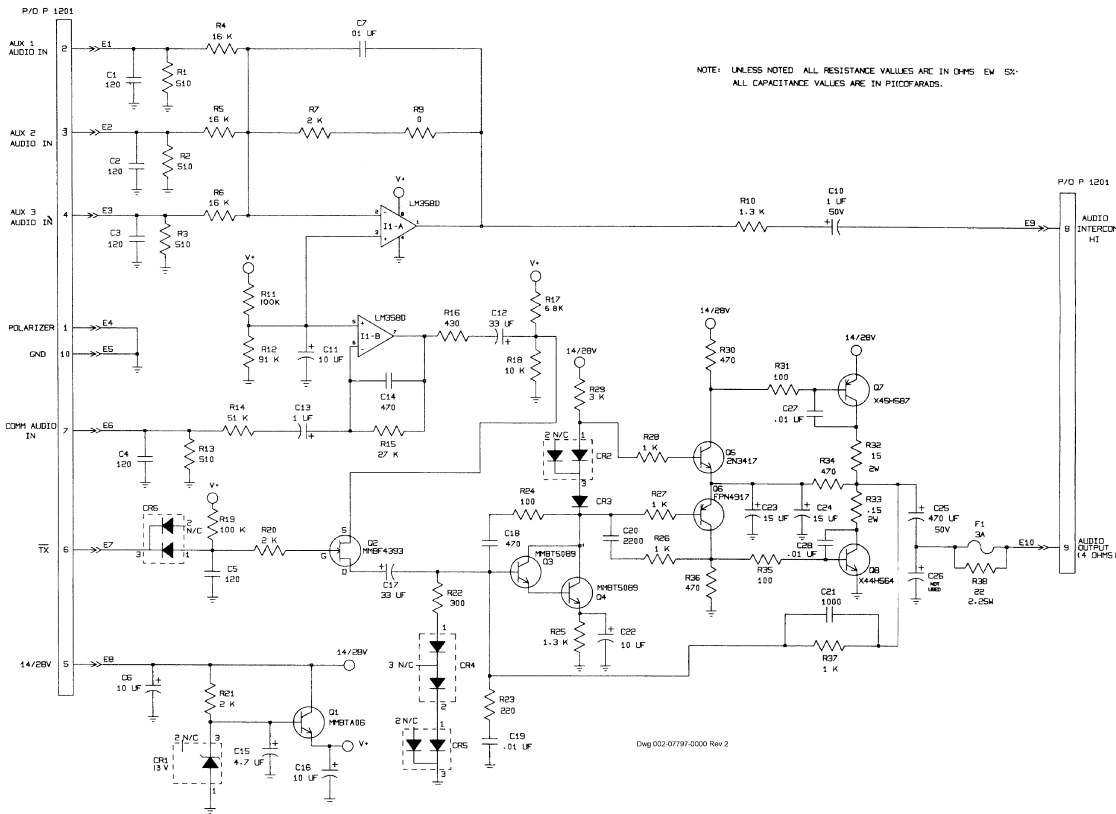


FIGURE 6-14B Audio Amplifier Board Schematic (Dwg No 002-07797-0000, Rev 2)

6.4.10 Main Board

200-07799-0000 97A MAIN BD 25KHZ REV AB
 200-07799-0001 96A MAIN BD 25KHZ REV AB
 200-07799-0002 97A MAIN BD 50KHZ REV AA
 200-07799-0099 COMMON BOM REV CK

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| C101 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C102 | 106-05399-0020 | | CH 3.9PF NPO/100V | EA | . | . | . | 1.00 |
| C103 | 106-05479-0020 | | CH 4.7PF NPO/100V | EA | . | . | . | 1.00 |
| C104 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C105 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C107 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | . | . | 1.00 |
| C108 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C109 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C110 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C111 | 106-04682-0057 | | CAPCH6800PFX7R/100 | EA | . | . | . | 1.00 |
| C112 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C113 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C114 | 106-05689-0020 | | CH 6.8PF NPO/100V | EA | . | . | . | 1.00 |
| C115 | 106-05030-0020 | | CH 3.0PF NPO/100V | EA | . | . | . | 1.00 |
| C116 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C117 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C118 | 106-05060-0020 | | CH 6PF NPO 100V | EA | . | . | . | 1.00 |
| C119 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| C120 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C121 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C122 | 106-00146-1R2B | | CAP PORC 1.2PF 500 | EA | 1.00 | 1.00 | . | . |
| C123 | 106-00146-1R2B | | CAP PORC 1.2PF 500 | EA | 1.00 | 1.00 | . | . |
| C124 | 106-00146-1R2B | | CAP PORC 1.2PF 500 | EA | 1.00 | 1.00 | . | . |
| C125 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C126 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C127 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C128 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C129 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C130 | 106-04392-0057 | | CAPCH3900PFX7R/100 | EA | . | . | . | 1.00 |
| C131 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C132 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | . | . | 1.00 |
| C133 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | . | . | 1.00 |
| C134 | 102-00085-0000 | | CAP VAR SURF MTG | EA | . | . | . | 1.00 |
| C135 | 097-00108-0020 | | CAP EL 0.47UF | EA | . | . | . | 1.00 |
| C136 | 106-05020-0020 | | CH 2PF NPO 100V | EA | . | . | . | 1.00 |
| C137 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C138 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | . | . | . | 1.00 |
| C139 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C140 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C141 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 | 1.00 | 1.00 | . |
| C142 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 | 1.00 | 1.00 | . |
| C143 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 | 1.00 | 1.00 | . |
| C144 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C145 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C146 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | . | . | 1.00 |
| C147 | 106-05020-0020 | | CH 2PF NPO 100V | EA | . | . | . | 1.00 |
| C148 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C149 | 106-04820-0026 | | CAP CH82PFNPO/100V | EA | . | . | . | 1.00 |
| C150 | 106-04330-0026 | | CH 33PF NPO/100V | EA | . | . | . | 1.00 |
| C151 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C152 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C153 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C154 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | . | . | 1.00 |
| C155 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | . | . | 1.00 |
| C156 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C157 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| C158 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C159 | 106-04151-0026 | | CH 150PF NPO/100V | EA | . | . | . | 1.00 |
| C160 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C161 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C162 | 106-04154-0078 | | CAP CH 150KZ5U/50V | EA | . | . | . | 1.00 |
| C163 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C164 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C165 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C166 | 096-01082-0057 | | CAP TN 1UF 35V | EA | . | . | . | 1.00 |
| C167 | 097-00149-0000 | | CAP AL 2200UF 25V | EA | 1.00 | . | 1.00 | . |
| C167 | 097-00149-0001 | | CAP AL 1000UF 50V | EA | . | 1.00 | . | . |
| C168 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C169 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C170 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C171 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C172 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C173 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C174 | 111-00001-0068 | | CAP CR .068UF 50V | EA | . | . | . | 1.00 |
| C175 | 111-00001-0003 | | CAP CR .22UF 50V | EA | . | . | . | 1.00 |
| C176 | 111-00001-0003 | | CAP CR .22UF 50V | EA | . | . | . | 1.00 |
| C177 | 097-00108-0018 | | CAP EL 0.22UF | EA | . | . | . | 1.00 |
| C178 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C179 | 097-00108-0014 | | CAP EL 4.7UF 35V | EA | . | . | . | 1.00 |
| C180 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C181 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C182 | 097-00108-0023 | | CAP EL 3.3UF | EA | . | . | . | 1.00 |
| C183 | 097-00108-0020 | | CAP EL 0.47UF | EA | . | . | . | 1.00 |
| C184 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C185 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C186 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C187 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C188 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C189 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C190 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C191 | 097-00108-0022 | | CAP EL 2.2UF | EA | . | . | . | 1.00 |
| C192 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| C193 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C194 | 111-00001-0001 | | CAP CR .1UF 50V | EA | . | . | . | 1.00 |
| C195 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C196 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C197 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C198 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C199 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C200 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C201 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C202 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C203 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C204 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C205 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C206 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C207 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C208 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C209 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C210 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C211 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C212 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C213 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C214 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C215 | 097-00108-0015 | | CAP EL 10UF 35V | EA | . | 1.00 | . | . |
| C216 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C217 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C218 | 106-04222-0057 | | CAPCH2200PFX7R/100 | EA | . | . | . | 1.00 |
| C219 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| C220 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C221 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C222 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C223 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| C224 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C225 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C226 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | . | . | 1.00 |
| C227 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C228 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C229 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C230 | 111-00001-0006 | | CAP CR .47UF 50V | EA | . | . | . | 1.00 |
| C231 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | . | . | 1.00 |
| C232 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C233 | 106-04101-0026 | | CH 100PF NPO/100V | EA | . | . | . | 1.00 |
| C235 | 111-00001-0068 | | CAP CR .068UF 50V | EA | 1.00 | 1.00 | 1.00 | . |
| C236 | 111-00001-0026 | | CAP CR .33UF 50V | EA | . | . | . | 1.00 |
| C237 | 096-01082-0040 | | CAP TN 3.3UF 35V | EA | . | . | . | 1.00 |
| C238 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C239 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C240 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| C241 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C242 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C243 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C244 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C245 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C246 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C247 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C248 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C249 | 106-04390-0026 | | CH 39PF NPO/100V | EA | . | . | . | 1.00 |
| C250 | 097-00108-0023 | | CAP EL 3.3UF | EA | . | . | . | 1.00 |
| C251 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C252 | 106-04391-0026 | | CH 390PF NPO/100V | EA | . | . | . | 1.00 |
| C253 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C254 | 106-04270-0026 | | CH 27PF NPO/100V | EA | 1.00 | 1.00 | 1.00 | . |
| C255 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C256 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C257 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C258 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C259 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C260 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | . | . | . | 1.00 |
| C261 | 106-04821-0016 | | CAP CH820PFNPO/50V | EA | . | . | . | 1.00 |
| C262 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C263 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C264 | 106-04821-0016 | | CAP CH820PFNPO/50V | EA | . | . | . | 1.00 |
| C265 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C267 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C268 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C269 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C270 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C271 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C272 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | . | . | 1.00 |
| C273 | 106-04829-0020 | | CAP CH 8.2 NPO/100 | EA | . | . | . | 1.00 |
| C274 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C281 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C282 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C284 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C285 | 096-01082-0002 | | CAP TN 1UF 35V | EA | . | . | . | 1.00 |
| C286 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | . | . | 1.00 |
| C287 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | . | . | 1.00 |
| CR101 | 007-04020-0005 | | MS5 VARACTOR DIODE | EA | . | . | . | 1.00 |
| CR102 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | . | . | 1.00 |
| CR104 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | . | . | 1.00 |
| CR105 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| CR106 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR107 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR108 | 007-05039-0002 | | DIO Z 40.2V | EA | . | . | . | 1.00 |
| CR109 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR110 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR111 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| CR112 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | . | . | 1.00 |
| CR113 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR114 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | . | . | 1.00 |
| CR115 | 007-05117-0017 | | DIO Z 16V SOT | EA | 1.00 | 1.00 | 1.00 | . |
| CR116 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| CR117 | 007-06228-0000 | | RF SWITCHING DIODE | EA | . | . | . | 1.00 |
| CR118 | 007-05117-0023 | | DIO Z 30V SOT | EA | . | . | . | 1.00 |
| CR119 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| CR120 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR121 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| CR122 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | . | . | . | 1.00 |
| CR123 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | . | 1.00 | . | . |
| CR124 | 007-06105-0000 | | DIO HV FDH444 | EA | . | . | . | 1.00 |
| CR125 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| F101 | 036-00014-0000 | | FUSE 3AG 250V 10A | EA | . | . | . | 1.00 |
| FL101 | 017-00069-0000 | | FLTR XTAL 8P | EA | 1.00 | 1.00 | . | . |
| FL101 | 017-00076-0000 | | FLTR XTAL 11.4MHZ | EA | . | . | 1.00 | . |
| I101 | 120-03020-0001 | | IC IF AMP S0 | EA | . | . | . | 1.00 |
| I102 | 120-03020-0001 | | IC IF AMP S0 | EA | . | . | . | 1.00 |
| I103 | 120-03317-0000 | | SYNTHESIZER CX7925 | EA | 1.00 | 1.00 | 1.00 | . |
| I104 | 120-03094-0032 | | IC LM340LAZ-5.0 | EA | . | . | . | 1.00 |
| I105 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | . | . | 1.00 |
| I106 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | . | . | 1.00 |
| I107 | 120-03127-0011 | | IC LM2903 S0 PKG | EA | . | . | . | 1.00 |
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | . | . | 1.00 |
| I109 | 120-03094-0032 | | IC LM340LAZ-5.0 | EA | . | . | . | 1.00 |
| I110 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| I111 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | . | . | 1.00 |
| I112 | 120-03190-0000 | | AUDIO AMP LM1877N- | EA | . | . | . | 1.00 |
| I113 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | . | . | 1.00 |
| L101 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | . | . | 1.00 |
| L102 | 019-02084-0024 | | CH 1.5UH 5% | EA | . | . | . | 1.00 |
| L103 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | . | . | 1.00 |
| L104 | 019-02084-0027 | | CH 1.8UH 10% | EA | . | . | . | 1.00 |
| L105 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | . | . | 1.00 |
| L106 | 019-02084-0034 | | CH 3.9UH 5% | EA | . | . | . | 1.00 |
| L107 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | . | . | 1.00 |
| L108 | 019-02084-0021 | | CH 1UH 10% | EA | . | . | . | 1.00 |
| L109 | 019-02209-0000 | | CHOKE FILTER | EA | . | . | . | 1.00 |
| L110 | 019-08078-0000 | | COIL TUN 20MH | EA | . | . | . | 1.00 |
| L111 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L112 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L113 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L114 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 | . | . |
| L115 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L116 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L117 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L118 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 | . | . |
| L119 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| L120 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L121 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L122 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L123 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L124 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L125 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . |
| L126 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 | . | . |
| L127 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| L128 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . |
| L129 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| L130 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L132 | 019-02084-0027 | | CH 1.8UH 10% | EA | . | . | . | 1.00 |
| L133 | 019-02084-0021 | | CH 1UH 10% | EA | . | . | . | 1.00 |
| L134 | 019-02099-0003 | | CH .047UH 5% | EA | . | . | . | 1.00 |
| L135 | 019-02084-0000 | | CH .15UH 5% | EA | . | . | . | 1.00 |
| L136 | 019-02084-0005 | | CH .22UH 10% | EA | . | . | . | 1.00 |
| L137 | 019-02084-0009 | | CH .33UH 10% | EA | . | . | . | 1.00 |
| Q101 | 007-00254-0001 | | XSTR S PNP SOT-23 | EA | . | . | . | 1.00 |
| Q102 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| Q103 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| Q104 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q105 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q106 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q107 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q108 | 007-00579-0000 | | XSTR 2SK241 | EA | . | . | . | 1.00 |
| Q109 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q110 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q111 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q112 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q114 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | . | . | 1.00 |
| Q115 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | . | . | 1.00 |
| Q116 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | . | . | . | 1.00 |
| Q117 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q118 | 007-00280-0001 | | XSTR E175/J175 | EA | . | . | . | 1.00 |
| Q119 | 007-00280-0001 | | XSTR E175/J175 | EA | . | . | . | 1.00 |
| Q120 | 007-00280-0001 | | XSTR E175/J175 | EA | . | . | . | 1.00 |
| Q121 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | . | . | . | 1.00 |
| Q123 | 007-00078-0001 | | XSTR S NPN 2N3417 | EA | . | . | . | 1.00 |
| Q126 | 007-00250-0000 | | XSTR 2N4427 | EA | . | . | . | 1.00 |
| Q127 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q128 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | . | 1.00 |
| Q129 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | . | 1.00 |
| Q131 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q132 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q133 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | . | 1.00 |
| Q134 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q135 | 007-00537-0000 | | XSTR PNP MMBT5087 | EA | . | . | . | 1.00 |
| Q136 | 007-00537-0000 | | XSTR PNP MMBT5087 | EA | . | . | . | 1.00 |
| Q137 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q138 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | . | 1.00 |
| Q139 | 007-00383-0004 | | SOT-23 2N2222A XST | EA | . | . | . | 1.00 |
| Q140 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q141 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| R1001 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | . | . | 1.00 |
| R1002 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | . | . | 1.00 |
| R1003 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R1004 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R1005 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | . | . | 1.00 |
| R1006 | 139-00200-0000 | | RES CH 20.0 EW 1% | EA | . | . | . | 1.00 |
| R1007 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R1009 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | . | . | 1.00 |
| R101 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R1010 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R1011 | 139-02211-0000 | | RES CH 2.21K EW 1% | EA | . | . | . | 1.00 |
| R1012 | 139-08661-0000 | | RES CH 8.66K EW 1% | EA | . | . | . | 1.00 |
| R1013 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R1014 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R1015 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R1016 | 139-02210-0000 | | RES CH 221 EW 1% | EA | 1.00 | 1.00 | 1.00 | . |
| R1017 | 139-01211-0000 | | RES CHIP1.21KEW1% | EA | . | 1.00 | . | . |
| R1018 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| R1019 | 139-00750-0000 | | RES CH 75.0 EW 1% | EA | . | . | . | 1.00 |
| R102 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R1020 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R1021 | 130-05027-0033 | | RES CH 2.7 QW 5% | EA | . | . | . | 1.00 |
| R1022 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R1023 | 130-05027-0033 | | RES CH 2.7 QW 5% | EA | . | . | . | 1.00 |
| R1024 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R1025 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R103 | 139-01211-0000 | | RES CHIP1.21KEW1% | EA | . | . | . | 1.00 |
| R104 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | 1.00 | . | . |
| R105 | 139-02671-0000 | | RES CH 2.67K EW 1% | EA | . | . | . | 1.00 |
| R106 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R107 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R108 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R109 | 139-00475-0000 | | RES CH 47.5 EW 1% | EA | . | . | . | 1.00 |
| R110 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | . | . | 1.00 |
| R111 | 139-04322-0000 | | RES CHIP 43.2KEW1% | EA | . | . | . | 1.00 |
| R112 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | . | . | 1.00 |
| R113 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | . | . | 1.00 |
| R114 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R115 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R116 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R117 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | . | . | 1.00 |
| R118 | 139-05112-0000 | | RES CHIP 51.1K 1% | EA | . | . | . | 1.00 |
| R119 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R120 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R121 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R122 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R123 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | . | 1.00 |
| R124 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | . | . | 1.00 |
| R125 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | . | 1.00 |
| R126 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R127 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R128 | 139-01101-0000 | | RES CH 1.1K EW 1% | EA | . | . | . | 1.00 |
| R129 | 139-09090-0000 | | RES CHIP 909 EW 1% | EA | . | . | . | 1.00 |
| R130 | 139-00562-0000 | | RES CH 56.2 EW 1% | EA | . | . | . | 1.00 |
| R131 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R132 | 139-02002-0000 | | RES CHIP 20.0KEW1% | EA | . | . | . | 1.00 |
| R133 | 139-03920-0000 | | 392 OHM 1/8W 1% | EA | . | . | . | 1.00 |
| R134 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | . | . | 1.00 |
| R135 | 139-01820-0000 | | RES CH 182 EW 1% | EA | . | . | . | 1.00 |
| R136 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R137 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | . | . | 1.00 |
| R138 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R139 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R140 | 139-03320-0000 | | RES CHIP 332 EW 1% | EA | . | . | . | 1.00 |
| R141 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | . | . | 1.00 |
| R142 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R143 | 139-08251-0000 | | RES CH 8.25K EW 1% | EA | . | . | . | 1.00 |
| R144 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R145 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | . | . | 1.00 |
| R146 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R147 | 139-03320-0000 | | RES CHIP 332 EW 1% | EA | . | . | . | 1.00 |
| R148 | 139-08251-0000 | | RES CH 8.25K EW 1% | EA | . | . | . | 1.00 |
| R149 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R150 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R151 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R152 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | . | 1.00 |
| R153 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | . | . | 1.00 |
| R154 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R155 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | . | 1.00 |
| R156 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | . | . | 1.00 |
| R157 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| R158 | 139-06812-0000 | | RES 68.1K EW 1% | EA | . | . | . | 1.00 |
| R159 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R160 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R161 | 139-03921-0000 | | RES CH 3.92K EW 1% | EA | . | . | . | 1.00 |
| R162 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R163 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R164 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R165 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R166 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R167 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R168 | 139-01103-0000 | | RES CHIP 110K EW1% | EA | . | . | . | 1.00 |
| R169 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R170 | 139-01102-0000 | | RES 11K EW 1% | EA | . | . | . | 1.00 |
| R171 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | . | . | . | 1.00 |
| R172 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R173 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R174 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R175 | 139-03652-0000 | | RES CHIP 36.5KEW1% | EA | . | . | . | 1.00 |
| R176 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | . | . | 1.00 |
| R177 | 139-02742-0000 | | RES CHIP 27.4KEW1% | EA | . | . | . | 1.00 |
| R178 | 139-05111-0000 | | RES CHIP 5.11KEW1% | EA | . | . | . | 1.00 |
| R179 | 139-05111-0000 | | RES CHIP 5.11KEW1% | EA | . | . | . | 1.00 |
| R180 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R181 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R182 | 139-07500-0000 | | RES CHIP 750 EW 1% | EA | . | . | . | 1.00 |
| R183 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | . | 1.00 |
| R184 | 133-00351-0005 | | POTENTIOMETER 22K | EA | . | . | . | 1.00 |
| R185 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R186 | 139-02002-0000 | | RES CHIP 20.0KEW1% | EA | . | . | . | 1.00 |
| R187 | 139-01242-0000 | | RES CHIP 12.4KEW1% | EA | . | . | . | 1.00 |
| R188 | 139-01822-0000 | | RES CHIP 18.2KEW1% | EA | . | . | . | 1.00 |
| R189 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | . | . | 1.00 |
| R190 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R191 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R192 | 139-05620-0000 | | RES CH 562 EW 1% | EA | . | . | . | 1.00 |
| R193 | 131-00012-0033 | | RES CF 1.2 HW 5% | EA | . | . | . | 1.00 |
| R194 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R195 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | . | . | 1.00 |
| R196 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R197 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R198 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | . | . | 1.00 |
| R199 | 139-06193-0000 | | RES CH 619KEW 1% | EA | . | . | . | 1.00 |
| R200 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R201 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | . | . | 1.00 |
| R202 | 139-02743-0000 | | RES CH 274K EW 1% | EA | . | . | . | 1.00 |
| R203 | 139-04750-0000 | | RES CH 475 EW 1% | EA | 1.00 | . | 1.00 | . |
| R204 | 139-02431-0000 | | RES CH 2.43K EW 1% | EA | . | . | . | 1.00 |
| R205 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R206 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R207 | 139-09091-0000 | | RES CH 9.09K EW 1% | EA | . | . | . | 1.00 |
| R208 | 139-01332-0000 | | RES CHIP 13.3KEW1% | EA | . | . | . | 1.00 |
| R209 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R210 | 139-02741-0000 | | RES CH 2.74K EW 1% | EA | . | . | . | 1.00 |
| R211 | 139-02003-0000 | | RES CHIP 200KEW1% | EA | . | . | . | 1.00 |
| R212 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R213 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R214 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R215 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R216 | 139-01102-0000 | | RES 11K EW 1% | EA | . | . | . | 1.00 |
| R217 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | . | . | . | 1.00 |
| R218 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R219 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R220 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| R221 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | . | . | 1.00 |
| R222 | 139-01501-0000 | | RES CH 1.5K EW 1% | EA | . | . | . | 1.00 |
| R223 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | . | 1.00 |
| R224 | 130-05101-0033 | | RES CH 100 QW 5% | EA | . | . | . | 1.00 |
| R225 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | . | . | 1.00 |
| R226 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R227 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R228 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R229 | 139-00150-0000 | | RES CH 15 EW 1% | EA | . | . | . | 1.00 |
| R230 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R231 | 139-01004-0000 | | RES CHIP 1M EW 1% | EA | . | . | . | 1.00 |
| R232 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R233 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | . | . | 1.00 |
| R234 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | . | . | 1.00 |
| R235 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | . | . | 1.00 |
| R236 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R237 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R238 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R239 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R240 | 139-00221-0000 | | RES CH 22.1 EW 1% | EA | . | . | . | 1.00 |
| R241 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R242 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R243 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R244 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | . | . | 1.00 |
| R245 | 139-05621-0000 | | RES CHIP 5.62KEW1% | EA | . | . | . | 1.00 |
| R246 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R247 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | . | . | 1.00 |
| R248 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 | . | . |
| R249 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | 1.00 | . | 1.00 | . |
| R250 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | 1.00 | 1.00 | 1.00 | . |
| R251 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | 1.00 | . | . |
| R251 | 139-09091-0000 | | RES CH 9.09K EW 1% | EA | 1.00 | . | 1.00 | . |
| R252 | 131-00162-0033 | | RES CF 1.6K HW 5% | EA | . | 1.00 | . | . |
| R252 | 131-00182-0033 | | RES CF 1.8K HW 5% | EA | 1.00 | . | 1.00 | . |
| R253 | 139-01500-0000 | | RES CH 150 EW 1% | EA | . | . | . | 1.00 |
| R254 | 139-06191-0000 | | RES CH 6.19KEW 1% | EA | . | . | . | 1.00 |
| R255 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R256 | 133-00351-0004 | | POTENTIOMETER 10K | EA | 1.00 | . | 1.00 | . |
| R256 | 133-00351-0005 | | POTENTIOMETER 22K | EA | . | 1.00 | . | . |
| R257 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | . | . | 1.00 |
| R258 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | . | . | 1.00 |
| R259 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . |
| R260 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . |
| R261 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 | . | . |
| R262 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | . | 1.00 |
| R263 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | . | 1.00 |
| R264 | 139-06191-0000 | | RES CH 6.19KEW 1% | EA | . | . | . | 1.00 |
| R265 | 139-03921-0000 | | RES CH 3.92K EW 1% | EA | . | . | . | 1.00 |
| R266 | 139-01821-0000 | | RES CHIP 1.82KEW1% | EA | . | . | . | 1.00 |
| R267 | 133-00351-0003 | | POTENTIOMETER 4.7K | EA | . | . | . | 1.00 |
| R268 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R269 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | . | . | 1.00 |
| R270 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R271 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R272 | 132-05051-0000 | | RES WW .15 2W 5% | EA | . | 1.00 | . | . |
| R273 | 132-05051-0000 | | RES WW .15 2W 5% | EA | . | 1.00 | . | . |
| R274 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R275 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | . | . | 1.00 |
| R276 | 139-03651-0000 | | RESCH 3.65K 8EW 1% | EA | . | . | . | 1.00 |
| R277 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R278 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | . | . | 1.00 |
| R279 | 139-02210-0000 | | RES CH 221 EW 1% | EA | 1.00 | 1.00 | 1.00 | . |
| R280 | 139-06810-0000 | | RES CH 681 EW 1% | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| R281 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | . | . | 1.00 |
| R282 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R283 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R284 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | . | . | 1.00 |
| R286 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R287 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | . | . | 1.00 |
| R288 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R289 | 139-05620-0000 | | RES CH 562 EW 1% | EA | . | . | . | 1.00 |
| R290 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R291 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R292 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R293 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R294 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R295 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R296 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R297 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R298 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | . | . | 1.00 |
| R299 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | . | . | 1.00 |
| REF1 | 300-07799-0000 | | 14V MAIN BOARD KY | RF | .00 | . | .00 | . |
| REF1 | 300-07799-0001 | | 28V MAIN BOARD K | RF | . | .00 | . | . |
| REF2 | 002-07799-0000 | | KY96A/97A LCD MAIN | RF | . | . | . | .00 |
| T101 | 019-08079-0000 | | XFMR IF | EA | . | . | . | 1.00 |
| T102 | 019-08080-0000 | | XFMR IF 15PF | EA | . | . | . | 1.00 |
| T103 | 019-08102-0000 | | XFMR IF 27PF | EA | . | . | . | 1.00 |
| T104 | 019-08103-0000 | | XFMR IF | EA | . | . | . | 1.00 |
| T105 | 019-02328-0081 | | 3.5 TURN CT | EA | . | . | . | 1.00 |
| T106 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| T107 | 019-05083-0000 | | XFMR AUD | EA | . | . | . | 1.00 |
| T108 | 019-05084-0001 | | XFMR MOD 900T | EA | . | . | . | 1.00 |
| T109 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| T110 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| TP101 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP102 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP104 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP105 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP106 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP107 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP108 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP109 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP110 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP112 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP115 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| Y101 | 044-00272-0001 | | 3.975 MHZ .001% | EA | . | . | . | 1.00 |
| | 009-07799-0000 | | PC BD MAIN | EA | . | . | . | 1.00 |
| | 012-01174-0000 | | INSULATOR | EA | . | . | . | 5.00 |
| | 016-01040-0000 | | COATING TYPE AR | AR | . | . | . | 1.00 |
| | 016-01082-0000 | | DC RTV 3145 | AR | . | . | . | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | . | 1.40 |
| | 026-00004-0000 | | WIRE, CU, 20AWG, T | IN | 1.25 | . | 1.25 | 6.40 |
| | 026-00013-0000 | | WIRE, COAX, RG-178 | IN | . | . | . | 4.75 |
| | 030-02174-0001 | | PIN CONT | EA | . | . | . | 2.00 |
| | 030-02174-0004 | | PIN CONTACT | EA | . | . | . | 9.00 |
| | 047-08202-0001 | | FENCE VCO | EA | . | . | . | 1.00 |
| | 047-08203-0001 | | FENCE PRESELECT/IF | EA | . | . | . | 1.00 |
| | 047-08208-0001 | | COVER VCO | EA | . | . | . | 1.00 |
| | 047-08209-0001 | | COVER PRESELECT/IF | EA | . | . | . | 1.00 |
| | 047-08476-0002 | | SHIELD VCO W/INS | EA | . | . | . | 1.00 |
| | 047-08477-0002 | | SHIELD PRESELW/INS | EA | . | . | . | 1.00 |
| | 047-08550-0002 | | GERMAN SHIELD | EA | . | . | . | 1.00 |
| | 089-06004-0003 | | SCR FHP 2-56X3/16 | EA | . | . | . | 3.00 |
| | 090-00213-0000 | | FUSE CLIP 1/4 IN. | EA | . | . | . | 2.00 |
| | 091-00025-0000 | | WSHR XSTR INSUL | EA | . | . | . | 1.00 |
| | 150-00003-0010 | | TUBING TFLN 24AWG | IN | . | . | . | 1.08 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0000 | -0001 | -0002 | -0099 |
|--------|----------------|---------|-------------------|----|-------|-------|-------|-------|
| | 150-00005-0010 | | TUBING TFLN 20AWG | IN | .75 | . | .75 | 6.40 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | . | 2.00 |
| | 155-02031-0027 | | JUMPER CABLE 9C | EA | . | . | . | 1.00 |
| | 155-02031-0030 | | JUMPER CABLE 9C | EA | . | . | . | 1.00 |
| | 200-07799-0099 | | COMMON BOM | EA | 1.00 | 1.00 | 1.00 | . |
| | 200-08506-0000 | | PC BOARD | EA | . | . | . | 1.00 |
| | 200-08506-0004 | | PC BOARD | EA | . | . | . | 1.00 |
| | 200-08939-0000 | | FILTER BD | EA | . | . | . | 1.00 |

200-07799-0003 96A MAIN BD 50KHZ
 200-07799-0099 COMMON BOM

REV AA
 REV CK

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| C101 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C102 | 106-05399-0020 | | CH 3.9PF NPO/100V | EA | . | 1.00 |
| C103 | 106-05479-0020 | | CH 4.7PF NPO/100V | EA | . | 1.00 |
| C104 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C105 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C107 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | 1.00 |
| C108 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C109 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C110 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C111 | 106-04682-0057 | | CAPCH6800PFX7R/100 | EA | . | 1.00 |
| C112 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C113 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C114 | 106-05689-0020 | | CH 6.8PF NPO/100V | EA | . | 1.00 |
| C115 | 106-05030-0020 | | CH 3.0PF NPO/100V | EA | . | 1.00 |
| C116 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C117 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C118 | 106-05060-0020 | | CH 6PF NPO 100V | EA | . | 1.00 |
| C119 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| C120 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C121 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C125 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C126 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C127 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C128 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C129 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C130 | 106-04392-0057 | | CAPCH3900PFX7R/100 | EA | . | 1.00 |
| C131 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C132 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | 1.00 |
| C133 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | 1.00 |
| C134 | 102-00085-0000 | | CAP VAR SURF MTG | EA | . | 1.00 |
| C135 | 097-00108-0020 | | CAP EL 0.47UF | EA | . | 1.00 |
| C136 | 106-05020-0020 | | CH 2PF NPO 100V | EA | . | 1.00 |
| C137 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C138 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | . | 1.00 |
| C139 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C140 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C141 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 | . |
| C142 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 | . |
| C143 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | 1.00 | . |
| C144 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C145 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C146 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | 1.00 |
| C147 | 106-05020-0020 | | CH 2PF NPO 100V | EA | . | 1.00 |
| C148 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C149 | 106-04820-0026 | | CAP CH82PFNPO/100V | EA | . | 1.00 |
| C150 | 106-04330-0026 | | CH 33PF NPO/100V | EA | . | 1.00 |
| C151 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C152 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C153 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C154 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | 1.00 |
| C155 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | 1.00 |
| C156 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C157 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C158 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C159 | 106-04151-0026 | | CH 150PF NPO/100V | EA | . | 1.00 |
| C160 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C161 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C162 | 106-04154-0078 | | CAP CH 150KZ5U/50V | EA | . | 1.00 |
| C163 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C164 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C165 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| C166 | 096-01082-0057 | | CAP TN 1UF 35V | EA | . | 1.00 |
| C167 | 097-00149-0001 | | CAP AL 1000UF 50V | EA | 1.00 | . |
| C168 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C169 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C170 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C171 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C172 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C173 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C174 | 111-00001-0068 | | CAP CR .068UF 50V | EA | . | 1.00 |
| C175 | 111-00001-0003 | | CAP CR .22UF 50V | EA | . | 1.00 |
| C176 | 111-00001-0003 | | CAP CR .22UF 50V | EA | . | 1.00 |
| C177 | 097-00108-0018 | | CAP EL 0.22UF | EA | . | 1.00 |
| C178 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C179 | 097-00108-0014 | | CAP EL 4.7UF 35V | EA | . | 1.00 |
| C180 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C181 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C182 | 097-00108-0023 | | CAP EL 3.3UF | EA | . | 1.00 |
| C183 | 097-00108-0020 | | CAP EL 0.47UF | EA | . | 1.00 |
| C184 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C185 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C186 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C187 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C188 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C189 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C190 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C191 | 097-00108-0022 | | CAP EL 2.2UF | EA | . | 1.00 |
| C192 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| C193 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C194 | 111-00001-0001 | | CAP CR .1UF 50V | EA | . | 1.00 |
| C195 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C196 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C197 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C198 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C199 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C200 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C201 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C202 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C203 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C204 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C205 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C206 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C207 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C208 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C209 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C210 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C211 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C212 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C213 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C214 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C215 | 097-00108-0015 | | CAP EL 10UF 35V | EA | 1.00 | . |
| C216 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C217 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C218 | 106-04222-0057 | | CAPCH2200PFX7R/100 | EA | . | 1.00 |
| C219 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C220 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C221 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C222 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C223 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| C224 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C225 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C226 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | 1.00 |
| C227 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C228 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| C229 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C230 | 111-00001-0006 | | CAP CR .47UF 50V | EA | . | 1.00 |
| C231 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | 1.00 |
| C232 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C233 | 106-04101-0026 | | CH 100PF NPO/100V | EA | . | 1.00 |
| C235 | 111-00001-0068 | | CAP CR .068UF 50V | EA | 1.00 | . |
| C236 | 111-00001-0026 | | CAP CR .33UF 50V | EA | . | 1.00 |
| C237 | 096-01082-0040 | | CAP TN 3.3UF 35V | EA | . | 1.00 |
| C238 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C239 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C240 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| C241 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C242 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C243 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C244 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C245 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C246 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C247 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C248 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C249 | 106-04390-0026 | | CH 39PF NPO/100V | EA | . | 1.00 |
| C250 | 097-00108-0023 | | CAP EL 3.3UF | EA | . | 1.00 |
| C251 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C252 | 106-04391-0026 | | CH 390PF NPO/100V | EA | . | 1.00 |
| C253 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C254 | 106-04270-0026 | | CH 27PF NPO/100V | EA | 1.00 | . |
| C255 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C256 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C257 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C258 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C259 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C260 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | . | 1.00 |
| C261 | 106-04821-0016 | | CAP CH820PFNPO/50V | EA | . | 1.00 |
| C262 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C263 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C264 | 106-04821-0016 | | CAP CH820PFNPO/50V | EA | . | 1.00 |
| C265 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C267 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C268 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C269 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C270 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C271 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C272 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | 1.00 |
| C273 | 106-04829-0020 | | CAP CH 8.2 NPO/100 | EA | . | 1.00 |
| C274 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C281 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C282 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C284 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C285 | 096-01082-0002 | | CAP TN 1UF 35V | EA | . | 1.00 |
| C286 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | 1.00 |
| C287 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | 1.00 |
| CR101 | 007-04020-0005 | | MS5 VARACTOR DIODE | EA | . | 1.00 |
| CR102 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | 1.00 |
| CR104 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | 1.00 |
| CR105 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR106 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR107 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR108 | 007-05039-0002 | | DIO Z 40.2V | EA | . | 1.00 |
| CR109 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR110 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR111 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| CR112 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | 1.00 |
| CR113 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR114 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| CR115 | 007-05117-0017 | | DIO Z 16V SOT | EA | 1.00 | . |
| CR116 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| CR117 | 007-06228-0000 | | RF SWITCHING DIODE | EA | . | 1.00 |
| CR118 | 007-05117-0023 | | DIO Z 30V SOT | EA | . | 1.00 |
| CR119 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| CR120 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR121 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| CR122 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | . | 1.00 |
| CR123 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | 1.00 | . |
| CR124 | 007-06105-0000 | | DIO HV FDH444 | EA | . | 1.00 |
| CR125 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| F101 | 036-00014-0000 | | FUSE 3AG 250V 10A | EA | . | 1.00 |
| FL101 | 017-00076-0000 | | FLTR XTAL 11.4MHZ | EA | 1.00 | . |
| I101 | 120-03020-0001 | | IC IF AMP SO | EA | . | 1.00 |
| I102 | 120-03020-0001 | | IC IF AMP SO | EA | . | 1.00 |
| I103 | 120-03317-0000 | | SYNTHESIZER CX7925 | EA | 1.00 | . |
| I104 | 120-03094-0032 | | IC LM340LAZ-5.0 | EA | . | 1.00 |
| I105 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | 1.00 |
| I106 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | 1.00 |
| I107 | 120-03127-0011 | | IC LM2903 SO PKG | EA | . | 1.00 |
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | 1.00 |
| I109 | 120-03094-0032 | | IC LM340LAZ-5.0 | EA | . | 1.00 |
| I110 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| I111 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | 1.00 |
| I112 | 120-03190-0000 | | AUDIO AMP LM1877N- | EA | . | 1.00 |
| I113 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | 1.00 |
| L101 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | 1.00 |
| L102 | 019-02084-0024 | | CH 1.5UH 5% | EA | . | 1.00 |
| L103 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | 1.00 |
| L104 | 019-02084-0027 | | CH 1.8UH 10% | EA | . | 1.00 |
| L105 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | 1.00 |
| L106 | 019-02084-0034 | | CH 3.9UH 5% | EA | . | 1.00 |
| L107 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | 1.00 |
| L108 | 019-02084-0021 | | CH 1UH 10% | EA | . | 1.00 |
| L109 | 019-02209-0000 | | CHOKE FILTER | EA | . | 1.00 |
| L110 | 019-08078-0000 | | COIL TUN 20MH | EA | . | 1.00 |
| L111 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L112 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L113 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L114 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . |
| L115 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L116 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L117 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L118 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . |
| L119 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| L120 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L121 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L122 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L123 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L124 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L126 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . |
| L129 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| L130 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L132 | 019-02084-0027 | | CH 1.8UH 10% | EA | . | 1.00 |
| L133 | 019-02084-0021 | | CH 1UH 10% | EA | . | 1.00 |
| L134 | 019-02099-0003 | | CH .047UH 5% | EA | . | 1.00 |
| L135 | 019-02084-0000 | | CH .15UH 5% | EA | . | 1.00 |
| L136 | 019-02084-0005 | | CH .22UH 10% | EA | . | 1.00 |
| L137 | 019-02084-0009 | | CH .33UH 10% | EA | . | 1.00 |
| Q101 | 007-00254-0001 | | XSTR S PNP SOT-23 | EA | . | 1.00 |
| Q102 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| Q103 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| Q104 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| Q105 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q106 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q107 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q108 | 007-00579-0000 | | XSTR 2SK241 | EA | . | 1.00 |
| Q109 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q110 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q111 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q112 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q114 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | 1.00 |
| Q115 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | 1.00 |
| Q116 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | . | 1.00 |
| Q117 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q118 | 007-00280-0001 | | XSTR E175/J175 | EA | . | 1.00 |
| Q119 | 007-00280-0001 | | XSTR E175/J175 | EA | . | 1.00 |
| Q120 | 007-00280-0001 | | XSTR E175/J175 | EA | . | 1.00 |
| Q121 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | . | 1.00 |
| Q123 | 007-00078-0001 | | XSTR S NPN 2N3417 | EA | . | 1.00 |
| Q126 | 007-00250-0000 | | XSTR 2N4427 | EA | . | 1.00 |
| Q127 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q128 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | 1.00 |
| Q129 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | 1.00 |
| Q131 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q132 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q133 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | 1.00 |
| Q134 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q135 | 007-00537-0000 | | XSTR PNP MMBT5087 | EA | . | 1.00 |
| Q136 | 007-00537-0000 | | XSTR PNP MMBT5087 | EA | . | 1.00 |
| Q137 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q138 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | 1.00 |
| Q139 | 007-00383-0004 | | SOT-23 2N2222A XST | EA | . | 1.00 |
| Q140 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q141 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| R1001 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | 1.00 |
| R1002 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | 1.00 |
| R1003 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R1004 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R1005 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | 1.00 |
| R1006 | 139-00200-0000 | | RES CH 20.0 EW 1% | EA | . | 1.00 |
| R1007 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R1009 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | 1.00 |
| R101 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R1010 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R1011 | 139-02211-0000 | | RES CH 2.21K EW 1% | EA | . | 1.00 |
| R1012 | 139-08661-0000 | | RES CH 8.66K EW 1% | EA | . | 1.00 |
| R1013 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R1014 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R1015 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R1016 | 139-02210-0000 | | RES CH 221 EW 1% | EA | 1.00 | . |
| R1017 | 139-01211-0000 | | RES CHIP1.21KEW1% | EA | 1.00 | . |
| R1019 | 139-00750-0000 | | RES CH 75.0 EW 1% | EA | . | 1.00 |
| R102 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R1020 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R1021 | 130-05027-0033 | | RES CH 2.7 QW 5% | EA | . | 1.00 |
| R1022 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R1023 | 130-05027-0033 | | RES CH 2.7 QW 5% | EA | . | 1.00 |
| R1024 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R1025 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R103 | 139-01211-0000 | | RES CHIP1.21KEW1% | EA | . | 1.00 |
| R104 | 139-04750-0000 | | RES CH 475 EW 1% | EA | 1.00 | . |
| R105 | 139-02671-0000 | | RES CH 2.67K EW 1% | EA | . | 1.00 |
| R106 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R107 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R108 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| R109 | 139-00475-0000 | | RES CH 47.5 EW 1% | EA | . | 1.00 |
| R110 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | 1.00 |
| R111 | 139-04322-0000 | | RES CHIP 43.2KEW1% | EA | . | 1.00 |
| R112 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | 1.00 |
| R113 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | 1.00 |
| R114 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R115 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R116 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R117 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | 1.00 |
| R118 | 139-05112-0000 | | RES CHIP 51.1K 1% | EA | . | 1.00 |
| R119 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R120 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R121 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R122 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R123 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | 1.00 |
| R124 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | 1.00 |
| R125 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | 1.00 |
| R126 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R127 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R128 | 139-01101-0000 | | RES CH 1.1K EW 1% | EA | . | 1.00 |
| R129 | 139-09090-0000 | | RES CHIP 909 EW 1% | EA | . | 1.00 |
| R130 | 139-00562-0000 | | RES CH 56.2 EW 1% | EA | . | 1.00 |
| R131 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R132 | 139-02002-0000 | | RES CHIP 20.0KEW1% | EA | . | 1.00 |
| R133 | 139-03920-0000 | | 392 OHM 1/8W 1% | EA | . | 1.00 |
| R134 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | 1.00 |
| R135 | 139-01820-0000 | | RES CH 182 EW 1% | EA | . | 1.00 |
| R136 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R137 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | 1.00 |
| R138 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R139 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R140 | 139-03320-0000 | | RES CHIP 332 EW 1% | EA | . | 1.00 |
| R141 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | 1.00 |
| R142 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R143 | 139-08251-0000 | | RES CH 8.25K EW 1% | EA | . | 1.00 |
| R144 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R145 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | 1.00 |
| R146 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R147 | 139-03320-0000 | | RES CHIP 332 EW 1% | EA | . | 1.00 |
| R148 | 139-08251-0000 | | RES CH 8.25K EW 1% | EA | . | 1.00 |
| R149 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R150 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R151 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R152 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | 1.00 |
| R153 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | 1.00 |
| R154 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R155 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | 1.00 |
| R156 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | 1.00 |
| R157 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R158 | 139-06812-0000 | | RES 68.1K EW 1% | EA | . | 1.00 |
| R159 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R160 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R161 | 139-03921-0000 | | RES CH 3.92K EW 1% | EA | . | 1.00 |
| R162 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R163 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R164 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R165 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R166 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R167 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R168 | 139-01103-0000 | | RES CHIP 110K EW1% | EA | . | 1.00 |
| R169 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R170 | 139-01102-0000 | | RES 11K EW 1% | EA | . | 1.00 |
| R171 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| R172 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R173 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R174 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R175 | 139-03652-0000 | | RES CHIP 36.5KEW1% | EA | . | 1.00 |
| R176 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | 1.00 |
| R177 | 139-02742-0000 | | RES CHIP 27.4KEW1% | EA | . | 1.00 |
| R178 | 139-05111-0000 | | RES CHIP 5.11KEW1% | EA | . | 1.00 |
| R179 | 139-05111-0000 | | RES CHIP 5.11KEW1% | EA | . | 1.00 |
| R180 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R181 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R182 | 139-07500-0000 | | RES CHIP 750 EW 1% | EA | . | 1.00 |
| R183 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | 1.00 |
| R184 | 133-00351-0005 | | POTENTIOMETER 22K | EA | . | 1.00 |
| R185 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R186 | 139-02002-0000 | | RES CHIP 20.0KEW1% | EA | . | 1.00 |
| R187 | 139-01242-0000 | | RES CHIP 12.4KEW1% | EA | . | 1.00 |
| R188 | 139-01822-0000 | | RES CHIP 18.2KEW1% | EA | . | 1.00 |
| R189 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | 1.00 |
| R190 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R191 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R192 | 139-05620-0000 | | RES CH 562 EW 1% | EA | . | 1.00 |
| R193 | 131-00012-0033 | | RES CF 1.2 HW 5% | EA | . | 1.00 |
| R194 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R195 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | 1.00 |
| R196 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R197 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R198 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | 1.00 |
| R199 | 139-06193-0000 | | RES CH 619KEW 1% | EA | . | 1.00 |
| R200 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R201 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | 1.00 |
| R202 | 139-02743-0000 | | RES CH 274K EW 1% | EA | . | 1.00 |
| R204 | 139-02431-0000 | | RES CH 2.43K EW 1% | EA | . | 1.00 |
| R205 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R206 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R207 | 139-09091-0000 | | RES CH 9.09K EW 1% | EA | . | 1.00 |
| R208 | 139-01332-0000 | | RES CHIP 13.3KEW1% | EA | . | 1.00 |
| R209 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R210 | 139-02741-0000 | | RES CH 2.74K EW 1% | EA | . | 1.00 |
| R211 | 139-02003-0000 | | RES CHIP 200KEW1% | EA | . | 1.00 |
| R212 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R213 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R214 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R215 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R216 | 139-01102-0000 | | RES 11K EW 1% | EA | . | 1.00 |
| R217 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | . | 1.00 |
| R218 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R219 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R220 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R221 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | 1.00 |
| R222 | 139-01501-0000 | | RES CH 1.5K EW 1% | EA | . | 1.00 |
| R223 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | 1.00 |
| R224 | 130-05101-0033 | | RES CH 100 QW 5% | EA | . | 1.00 |
| R225 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | 1.00 |
| R226 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R227 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R228 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R229 | 139-00150-0000 | | RES CH 15 EW 1% | EA | . | 1.00 |
| R230 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R231 | 139-01004-0000 | | RES CHIP 1M EW 1% | EA | . | 1.00 |
| R232 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R233 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | 1.00 |
| R234 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | 1.00 |
| R235 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| R236 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R237 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R238 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R239 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R240 | 139-00221-0000 | | RES CH 22.1 EW 1% | EA | . | 1.00 |
| R241 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R242 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R243 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R244 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | 1.00 |
| R245 | 139-05621-0000 | | RES CHIP 5.62KEW1% | EA | . | 1.00 |
| R246 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R247 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | 1.00 |
| R248 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . |
| R250 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | 1.00 | . |
| R251 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | 1.00 | . |
| R252 | 131-00162-0033 | | RES CF 1.6K HW 5% | EA | 1.00 | . |
| R253 | 139-01500-0000 | | RES CH 150 EW 1% | EA | . | 1.00 |
| R254 | 139-06191-0000 | | RES CH 6.19KEW 1% | EA | . | 1.00 |
| R255 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R256 | 133-00351-0005 | | POTENTIOMETER 22K | EA | 1.00 | . |
| R257 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | 1.00 |
| R258 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | 1.00 |
| R261 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . |
| R262 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | 1.00 |
| R263 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | 1.00 |
| R264 | 139-06191-0000 | | RES CH 6.19KEW 1% | EA | . | 1.00 |
| R265 | 139-03921-0000 | | RES CH 3.92K EW 1% | EA | . | 1.00 |
| R266 | 139-01821-0000 | | RES CHIP 1.82KEW1% | EA | . | 1.00 |
| R267 | 133-00351-0003 | | POTENTIOMETER 4.7K | EA | . | 1.00 |
| R268 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R269 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | 1.00 |
| R270 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R271 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R272 | 132-05051-0000 | | RES WW .15 2W 5% | EA | 1.00 | . |
| R273 | 132-05051-0000 | | RES WW .15 2W 5% | EA | 1.00 | . |
| R274 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R275 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | 1.00 |
| R276 | 139-03651-0000 | | RESCH 3.65K 8EW 1% | EA | . | 1.00 |
| R277 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R278 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | 1.00 |
| R279 | 139-02210-0000 | | RES CH 221 EW 1% | EA | 1.00 | . |
| R280 | 139-06810-0000 | | RES CH 681 EW 1% | EA | . | 1.00 |
| R281 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | 1.00 |
| R282 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R283 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R284 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | 1.00 |
| R286 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R287 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | 1.00 |
| R288 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R289 | 139-05620-0000 | | RES CH 562 EW 1% | EA | . | 1.00 |
| R290 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R291 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R292 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R293 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R294 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R295 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R296 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R297 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R298 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | 1.00 |
| R299 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | 1.00 |
| REF1 | 300-07799-0001 | | 28V MAIN BOARD K | RF | .00 | . |
| REF2 | 002-07799-0000 | | KY96A/97A LCD MAIN | RF | . | .00 |
| T101 | 019-08079-0000 | | XFMR IF | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0003 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| T102 | 019-08080-0000 | | XFMR IF 15PF | EA | . | 1.00 |
| T103 | 019-08102-0000 | | XFMR IF 27PF | EA | . | 1.00 |
| T104 | 019-08103-0000 | | XFMR IF | EA | . | 1.00 |
| T105 | 019-02328-0081 | | 3.5 TURN CT | EA | . | 1.00 |
| T106 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| T107 | 019-05083-0000 | | XFMR AUD | EA | . | 1.00 |
| T108 | 019-05084-0001 | | XFMR MOD 900T | EA | . | 1.00 |
| T109 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| T110 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| TP101 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP102 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP104 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP105 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP106 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP107 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP108 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP109 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP110 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP112 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP115 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| Y101 | 044-00272-0001 | | 3.975 MHZ .001% | EA | . | 1.00 |
| | 009-07799-0000 | | PC BD MAIN | EA | . | 1.00 |
| | 012-01174-0000 | | INSULATOR | EA | . | 5.00 |
| | 016-01040-0000 | | COATING TYPE AR | AR | . | 1.00 |
| | 016-01082-0000 | | DC RTV 3145 | AR | . | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | 1.40 |
| | 026-00004-0000 | | WIRE, CU, 20AWG, T | IN | . | 6.40 |
| | 026-00013-0000 | | WIRE, COAX, RG-178 | IN | . | 4.75 |
| | 030-02174-0001 | | PIN CONT | EA | . | 2.00 |
| | 030-02174-0004 | | PIN CONTACT | EA | . | 9.00 |
| | 047-08202-0001 | | FENCE VCO | EA | . | 1.00 |
| | 047-08203-0001 | | FENCE PRESELECT/IF | EA | . | 1.00 |
| | 047-08208-0001 | | COVER VCO | EA | . | 1.00 |
| | 047-08209-0001 | | COVER PRESELECT/IF | EA | . | 1.00 |
| | 047-08476-0002 | | SHIELD VCO W/INS | EA | . | 1.00 |
| | 047-08477-0002 | | SHIELD PRESELW/INS | EA | . | 1.00 |
| | 047-08550-0002 | | GERMAN SHIELD | EA | . | 1.00 |
| | 089-06004-0003 | | SCR FHP 2-56X3/16 | EA | . | 3.00 |
| | 090-00213-0000 | | FUSE CLIP 1/4 IN. | EA | . | 2.00 |
| | 091-00025-0000 | | WSHR XSTR INSUL | EA | . | 1.00 |
| | 150-00003-0010 | | TUBING TFLN 24AWG | IN | . | 1.08 |
| | 150-00005-0010 | | TUBING TFLN 20AWG | IN | . | 6.40 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | 2.00 |
| | 155-02031-0027 | | JUMPER CABLE 9C | EA | . | 1.00 |
| | 155-02031-0030 | | JUMPER CABLE 9C | EA | . | 1.00 |
| | 200-07799-0099 | | COMMON BOM | EA | 1.00 | . |
| | 200-08506-0000 | | PC BOARD | EA | . | 1.00 |
| | 200-08506-0004 | | PC BOARD | EA | . | 1.00 |
| | 200-08939-0000 | | FILTER BD | EA | . | 1.00 |

THIS PAGE RESERVED

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

200-07799-0000 97A MAIN BD 25KHZ REV 11 KY 0097A
 200-07799-0001 96A MAIN BD 25KHZ REV 11 KY 0096A
 200-07799-0002 97A MAIN BD 50KHZ REV 10 KY 0097A
 200-07799-0003 96A MAIN BD 50KHZ REV 10 KY 0096A
 200-07799-0099 COMMON BOM REV 32 KY 0096A KY 0097A

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | |
|--------|----------------|--------------------|---|----|----------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 |
| | 009-07799-0000 | PC BD MAIN | | EA | . | . | . | . | 1.00 |
| | 012-01174-0000 | INSULATOR | | EA | . | . | . | . | 5.00 |
| | 016-01040-0000 | COATING TYPE AR | | AR | . | . | . | . | 1.00 |
| | 016-01082-0000 | DC RTV 3145 | | AR | . | . | . | . | 1.00 |
| | 026-00004-0000 | WIRE COP TIN 20G | | IN | 1.25 | . | 1.25 | . | . |
| | 026-00013-0000 | CA COAX RG-178BU | | IN | . | . | . | . | 4.75 |
| | 030-02174-0004 | PIN CONTACT | | EA | . | . | . | . | 9.00 |
| | 047-08202-0001 | FENCE VCO | A | EA | . | . | . | . | 1.00 |
| | 047-08203-0001 | FENCE PRESELECT/IF | | EA | . | . | . | . | 1.00 |
| | 047-08208-0001 | COVER VCO | A | EA | . | . | . | . | 1.00 |
| | 047-08209-0001 | COVER PRESELECT/IF | A | EA | . | . | . | . | 1.00 |
| | 047-08476-0002 | SHIELD VCO W/INS | A | ** | . | . | . | . | 1.00 |
| | 047-08477-0002 | SHIELD PRESELW/INS | A | ** | . | . | . | . | 1.00 |
| | 047-08550-0002 | GERMAN SHIELD | | EA | . | . | . | . | 1.00 |
| | 089-06004-0003 | SCR FHP 2-56X3/16 | | EA | . | . | . | . | 3.00 |
| | 090-00213-0000 | FUSE CLIP 1/4" | | EA | . | . | . | . | 2.00 |
| | 091-00025-0000 | WSHR XSTR INSUL | | EA | . | . | . | . | 1.00 |
| | 150-00003-0010 | TUBING TFLN 24AWG | | IN | . | . | . | . | 1.08 |
| | 150-00005-0010 | TUBING TFLN 20AWG | | IN | 0.75 | . | 0.75 | . | . |
| | 150-00103-0000 | SLDR SLEEVE | | EA | . | . | . | . | 2.00 |
| | 200-07799-0099 | COMMON BOM | A | EA | 1.00 | 1.00 | 1.00 | 1.00 | . |
| | 200-08506-0000 | PC BOARD | A | EA | . | . | . | . | 1.00 |
| | 200-08506-0004 | PC BOARD | A | EA | . | . | . | . | 1.00 |
| C | 101 | 106-04473-0047 | | EA | . | . | . | . | 1.00 |
| C | 102 | 106-05399-0020 | | EA | . | . | . | . | 1.00 |
| C | 103 | 106-05479-0020 | | EA | . | . | . | . | 1.00 |
| C | 104 | 106-04102-0026 | | EA | . | . | . | . | 1.00 |
| C | 105 | 106-04471-0026 | | EA | . | . | . | . | 1.00 |
| C | 106 | 106-05020-0020 | | EA | . | . | . | . | 1.00 |
| C | 107 | 106-04221-0026 | | EA | . | . | . | . | 1.00 |
| C | 108 | 106-04473-0047 | | EA | . | . | . | . | 1.00 |
| C | 109 | 106-04121-0026 | | EA | . | . | . | . | 1.00 |
| C | 110 | 106-04473-0047 | | EA | . | . | . | . | 1.00 |
| C | 111 | 106-04682-0057 | | EA | . | . | . | . | 1.00 |
| C | 112 | 106-04121-0026 | | EA | . | . | . | . | 1.00 |
| C | 113 | 106-04121-0026 | | EA | . | . | . | . | 1.00 |
| C | 114 | 106-05689-0020 | | EA | . | . | . | . | 1.00 |
| C | 115 | 106-05030-0020 | | EA | . | . | . | . | 1.00 |
| C | 116 | 106-04471-0026 | | EA | . | . | . | . | 1.00 |
| C | 117 | 106-04471-0026 | | EA | . | . | . | . | 1.00 |
| C | 118 | 106-05060-0020 | | EA | . | . | . | . | 1.00 |
| C | 119 | 999-09999-0098 | | RF | . | . | . | . | X. |
| C | 120 | 106-04473-0047 | | EA | . | . | . | . | 1.00 |
| C | 121 | 106-04473-0047 | | EA | . | . | . | . | 1.00 |
| C | 122 | 106-00001-0003 | | EA | 1.00 | 1.00 | . | . | . |
| C | 123 | 106-00001-0003 | | EA | 1.00 | 1.00 | . | . | . |
| C | 124 | 106-00001-0003 | | EA | 1.00 | 1.00 | . | . | . |
| C | 125 | 097-00108-0007 | | EA | . | . | . | . | 1.00 |
| C | 126 | 106-04473-0047 | | EA | . | . | . | . | 1.00 |
| C | 127 | 106-04473-0047 | | EA | . | . | . | . | 1.00 |
| C | 128 | 097-00108-0007 | | EA | . | . | . | . | 1.00 |
| C | 129 | 106-04473-0047 | | EA | . | . | . | . | 1.00 |
| C | 130 | 106-04392-0057 | | EA | . | . | . | . | 1.00 |
| C | 131 | 106-04121-0026 | | EA | . | . | . | . | 1.00 |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | |
|--------|----------------|--------------------|----|------|----------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 |
| C 132 | 106-04470-0026 | CH 47PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 133 | 106-04470-0026 | CH 47PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 134 | 102-00085-0000 | CAP VAR SURF MTG | EA | . | . | . | . | 1.00 | |
| C 135 | 097-00108-0020 | CAP EL 0.47UF | EA | . | . | . | . | 1.00 | |
| C 136 | 106-05020-0020 | CAP CER CHIP SERS | EA | . | . | . | . | 1.00 | |
| C 137 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 138 | 106-04103-0057 | CAP CH 10KX7R/100V | EA | . | . | . | . | 1.00 | |
| C 139 | 106-04473-0047 | CAP CH 47K X7R/50V | EA | . | . | . | . | 1.00 | |
| C 140 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 141 | 106-04103-0057 | CAP CH 10KX7R/100V | EA | . | . | . | . | 1.00 | |
| C 142 | 106-04103-0057 | CAP CH 10KX7R/100V | EA | . | . | . | . | 1.00 | |
| C 143 | 106-04103-0057 | CAP CH 10KX7R/100V | EA | . | . | . | . | 1.00 | |
| C 144 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 145 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 146 | 106-04220-0026 | CH 22PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 147 | 106-05020-0020 | CAP CER CHIP SERS | EA | . | . | . | . | 1.00 | |
| C 148 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 149 | 106-04820-0026 | CAP CH82PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 150 | 106-04330-0026 | CH 33PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 151 | 097-00104-0036 | CAP AL 47UF 25V | EA | . | . | . | . | 1.00 | |
| C 152 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 153 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 154 | 106-04220-0026 | CH 22PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 155 | 106-04470-0026 | CH 47PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 156 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 157 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 158 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 159 | 106-04151-0026 | CH 150PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 160 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 161 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 162 | 106-04154-0078 | CAP CH 150KZ5U/50V | EA | . | . | . | . | 1.00 | |
| C 163 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 164 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 165 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 166 | 096-01082-0057 | CAP TN IUF 35V | EA | . | . | . | . | 1.00 | |
| C 167 | 097-00149-0000 | CAP AL 2200UF 25V | EA | 1.00 | . | 1.00 | . | . | |
| C 167 | 097-00149-0001 | CAP AL 1000UF 50V | EA | . | 1.00 | . | 1.00 | . | |
| C 168 | 097-00109-0006 | CAP EL 100UF 16V | EA | . | . | . | . | 1.00 | |
| C 169 | 106-04473-0047 | CAP CH 47K X7R/50V | EA | . | . | . | . | 1.00 | |
| C 170 | 106-04473-0047 | CAP CH 47K X7R/50V | EA | . | . | . | . | 1.00 | |
| C 171 | 106-04473-0047 | CAP CH 47K X7R/50V | EA | . | . | . | . | 1.00 | |
| C 172 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 173 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 174 | 111-00001-0068 | CAP CR .068UF 50V | EA | . | . | . | . | 1.00 | |
| C 175 | 111-00001-0003 | CAP CR .22UF 50V | EA | . | . | . | . | 1.00 | |
| C 176 | 111-00001-0003 | CAP CR .22UF 50V | EA | . | . | . | . | 1.00 | |
| C 177 | 097-00108-0018 | CAP EL 0.22UF | EA | . | . | . | . | 1.00 | |
| C 178 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 179 | 097-00108-0014 | CAP EL 4.7UF 35V | EA | . | . | . | . | 1.00 | |
| C 180 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 181 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 182 | 097-00108-0023 | CAP EL 3.3UF | EA | . | . | . | . | 1.00 | |
| C 183 | 097-00108-0020 | CAP EL 0.47UF | EA | . | . | . | . | 1.00 | |
| C 184 | 097-00109-0006 | CAP EL 100UF 16V | EA | . | . | . | . | 1.00 | |
| C 185 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 186 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 187 | 097-00109-0006 | CAP EL 100UF 16V | EA | . | . | . | . | 1.00 | |
| C 188 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 189 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 190 | 097-00109-0006 | CAP EL 100UF 16V | EA | . | . | . | . | 1.00 | |
| C 191 | 097-00108-0022 | CAP EL 2.2UF | EA | . | . | . | . | 1.00 | |
| C 192 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| C 193 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 194 | 111-00001-0001 | CAP CR .1UF 50V | EA | . | . | . | . | 1.00 | |
| C 195 | 097-00104-0036 | CAP AL 47UF 25V | EA | . | . | . | . | 1.00 | |
| C 196 | 097-00109-0006 | CAP EL 100UF 16V | EA | . | . | . | . | 1.00 | |
| C 197 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 198 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 199 | 097-00104-0036 | CAP AL 47UF 25V | EA | . | . | . | . | 1.00 | |
| C 200 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 201 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | |
|--------|----------------|--------------------|----|------|----------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 |
| C 202 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 203 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 204 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 205 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 206 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 207 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 208 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 209 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 210 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 211 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 212 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 213 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 214 | 097-00104-0036 | CAP AL 47UF 25V | EA | . | . | . | . | 1.00 | |
| C 215 | 097-00108-0015 | CAP EL 10UF 35V | EA | . | 1.00 | . | 1.00 | . | |
| C 216 | 097-00104-0036 | CAP AL 47UF 25V | EA | . | . | . | . | 1.00 | |
| C 217 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 218 | 106-04222-0057 | CAPCH2200PFX7R/100 | EA | . | . | . | . | 1.00 | |
| C 219 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 220 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 221 | 097-00108-0021 | CAP EL 1.0UF 50V | EA | . | . | . | . | 1.00 | |
| C 222 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 223 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| C 224 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 225 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 226 | 106-04331-0026 | CAPCH330PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 227 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 228 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 229 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 230 | 111-00001-0006 | CAP CR .47UF 50V | EA | . | . | . | . | 1.00 | |
| C 231 | 106-04221-0026 | CAP CH220PFNPO/100 | EA | . | . | . | . | 1.00 | |
| C 232 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 233 | 106-04101-0026 | CH 100PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 235 | 111-00001-0068 | CAP CR .068UF 50V | EA | . | . | . | . | 1.00 | |
| C 236 | 111-00001-0026 | CAP CR .33UF 50V | EA | . | . | . | . | 1.00 | |
| C 237 | 096-01082-0040 | CAP TN 3.3UF 35V | EA | . | . | . | . | 1.00 | |
| C 238 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 239 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 240 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| C 241 | 106-04471-0026 | CH 470PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 242 | 106-04471-0026 | CH 470PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 243 | 106-04471-0026 | CH 470PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 244 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 245 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 246 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 247 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 248 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 249 | 106-04390-0026 | CH 39PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 250 | 097-00108-0023 | CAP EL 3.3UF | EA | . | . | . | . | 1.00 | |
| C 251 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 252 | 106-04391-0026 | CH 390PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 253 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 254 | 106-04270-0026 | CH 27PF NPO/100V | EA | 1.00 | 1.00 | 1.00 | 1.00 | . | |
| C 255 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 256 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 257 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 258 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 259 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 260 | 106-04103-0057 | CAP CH 10KX7R/100V | EA | . | . | . | . | 1.00 | |
| C 261 | 106-04821-0016 | CAP CH820PFNPO/50V | EA | . | . | . | . | 1.00 | |
| C 262 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 263 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 | |
| C 264 | 106-04821-0016 | CAP CH820PFNPO/50V | EA | . | . | . | . | 1.00 | |
| C 265 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 267 | 097-00104-0036 | CAP AL 47UF 25V | EA | . | . | . | . | 1.00 | |
| C 268 | 097-00104-0036 | CAP AL 47UF 25V | EA | . | . | . | . | 1.00 | |
| C 269 | 097-00108-0007 | CAP EL 10UF 16V | EA | . | . | . | . | 1.00 | |
| C 270 | 097-00104-0036 | CAP AL 47UF 25V | EA | . | . | . | . | 1.00 | |
| C 271 | 106-04121-0026 | CAPCH120PFNPO/100V | EA | . | . | . | . | 1.00 | |
| C 272 | 106-04220-0026 | CH 22PF NPO/100V | EA | . | . | . | . | 1.00 | |
| C 273 | 106-05829-0020 | CAP CER CHIP SERS | EA | . | . | . | . | 1.00 | |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | |
|--------|-------------|----------------|--------------------|----|----------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 |
| C | 274 | 106-04104-0047 | CH 100KX7R/50V | EA | . | . | . | . | 1.00 |
| C | 281 | 106-04104-0078 | CAP CH 100KZ5U/50V | EA | . | . | . | . | 1.00 |
| C | 282 | 106-04104-0078 | CAP CH 100KZ5U/50V | EA | . | . | . | . | 1.00 |
| C | 284 | 106-04102-0026 | CH 1KPF NPO/100V | EA | . | . | . | . | 1.00 |
| C | 285 | 096-01082-0002 | CAP TN 1UF 35V | EA | . | . | . | . | 1.00 |
| C | 286 | 106-04221-0026 | CAP CH220PFNPO/100 | EA | . | . | . | . | 1.00 |
| CR | 101 | 007-04020-0002 | DIO V SMV1163M5 | EA | . | . | . | . | 1.00 |
| CR | 102 | 007-06181-0000 | DIO DUAL MMBD2835 | EA | . | . | . | . | 1.00 |
| CR | 104 | 007-06223-0000 | DIO DA204K | EA | . | . | . | . | 1.00 |
| CR | 105 | 007-06222-0000 | DIO DAN202K | EA | . | . | . | . | 1.00 |
| CR | 106 | 007-06222-0000 | DIO DAN202K | EA | . | . | . | . | 1.00 |
| CR | 107 | 007-06222-0000 | DIO DAN202K | EA | . | . | . | . | 1.00 |
| CR | 108 | 007-05039-0002 | DIO Z 40.2V | EA | . | . | . | . | 1.00 |
| CR | 109 | 007-06222-0000 | DIO DAN202K | EA | . | . | . | . | 1.00 |
| CR | 110 | 007-06222-0000 | DIO DAN202K | EA | . | . | . | . | 1.00 |
| CR | 111 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. |
| CR | 112 | 007-06223-0000 | DIO DA204K | EA | . | . | . | . | 1.00 |
| CR | 113 | 007-06222-0000 | DIO DAN202K | EA | . | . | . | . | 1.00 |
| CR | 114 | 007-06181-0000 | DIO DUAL MMBD2835 | EA | . | . | . | . | 1.00 |
| CR | 115 | 007-05117-0017 | DIO Z 16V SOT | EA | 1.00 | 1.00 | 1.00 | 1.00 | . |
| CR | 116 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. |
| CR | 117 | 007-06228-0000 | RF SWITCHING DIODE | EA | . | . | . | . | 1.00 |
| CR | 118 | 007-05117-0023 | DIO Z 30V SOT | EA | . | . | . | . | 1.00 |
| CR | 119 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. |
| CR | 120 | 007-06222-0000 | DIO DAN202K | EA | . | . | . | . | 1.00 |
| CR | 121 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. |
| CR | 122 | 007-05117-0007 | DIO Z 6.2V SOT | EA | . | . | . | . | 1.00 |
| CR | 123 | 007-05117-0007 | DIO Z 6.2V SOT | EA | . | 1.00 | . | 1.00 | . |
| CR | 124 | 007-06105-0000 | DIO HV FDH444 | EA | . | . | . | . | 1.00 |
| CR | 125 | 007-06222-0000 | DIO DAN202K | EA | . | . | . | . | 1.00 |
| F | 101 | 036-00014-0000 | FUSE 3AG 250V 10A | EA | . | . | . | . | 1.00 |
| FL | 101 | 017-00069-0000 | FLTR XTAL 8P | EA | 1.00 | 1.00 | . | . | . |
| FL | 101 | 017-00076-0000 | FLTR XTAL 11.4MHZ | EA | . | . | 1.00 | 1.00 | . |
| I | 101 | 120-03020-0001 | IC IF AMP SO | EA | . | . | . | . | 1.00 |
| I | 102 | 120-03020-0001 | IC IF AMP SO | EA | . | . | . | . | 1.00 |
| I | 103 | 120-03317-0000 | SYNTHESIZER CX7925 | EA | . | . | . | . | 1.00 |
| I | 104 | 120-03094-0032 | IC LM340LAZ-5.0 | EA | . | . | . | . | 1.00 |
| I | 105 | 120-03053-0009 | LM358D DUAL OP AMP | EA | . | . | . | . | 1.00 |
| I | 106 | 120-03053-0009 | LM358D DUAL OP AMP | EA | . | . | . | . | 1.00 |
| I | 107 | 120-03127-0011 | IC LM2903 SO PKG | EA | . | . | . | . | 1.00 |
| I | 108 | 120-03026-0000 | IC MC7805CT | EA | . | . | . | . | 1.00 |
| I | 109 | 120-03094-0032 | IC LM340LAZ-5.0 | EA | . | . | . | . | 1.00 |
| I | 110 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. |
| I | 111 | 120-03053-0009 | LM358D DUAL OP AMP | EA | . | . | . | . | 1.00 |
| I | 112 | 120-03190-0000 | AUDIO AMP LM1877N | EA | . | . | . | . | 1.00 |
| I | 113 | 120-03053-0009 | LM358D DUAL OP AMP | EA | . | . | . | . | 1.00 |
| L | 101 | 019-02312-0060 | IDCTR V 2.5T | EA | . | . | . | . | 1.00 |
| L | 102 | 019-02082-0016 | CH 1.5UH 5% | EA | . | . | . | . | 1.00 |
| L | 103 | 019-02312-0060 | IDCTR V 2.5T | EA | . | . | . | . | 1.00 |
| L | 104 | 019-02084-0027 | CH 1.8UH 10% | EA | . | . | . | . | 1.00 |
| L | 105 | 019-02312-0060 | IDCTR V 2.5T | EA | . | . | . | . | 1.00 |
| L | 106 | 019-02084-0034 | CH 3.9UH 5% | EA | . | . | . | . | 1.00 |
| L | 107 | 019-02312-0060 | IDCTR V 2.5T | EA | . | . | . | . | 1.00 |
| L | 108 | 019-02084-0021 | CH 1UH 10% | EA | . | . | . | . | 1.00 |
| L | 109 | 019-02209-0000 | CHOKE FILTER | EA | . | . | . | . | 1.00 |
| L | 110 | 019-08078-0000 | COIL TUN 20MH | EA | . | . | . | . | 1.00 |
| L | 111 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | 1.00 |
| L | 112 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | 1.00 |
| L | 113 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | 1.00 |
| L | 114 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | 1.00 | . | 1.00 | . |
| L | 115 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | 1.00 |
| L | 116 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | 1.00 |
| L | 117 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | 1.00 |
| L | 118 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | 1.00 | . | 1.00 | . |
| L | 119 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | |
|--------|----------------|--------------------|----|------|----------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 |
| L 120 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | . | 1.00 |
| L 121 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | . | 1.00 |
| L 122 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | . | 1.00 |
| L 123 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | . | 1.00 |
| L 124 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | . | 1.00 |
| L 125 | 013-00028-0001 | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . | . | . |
| L 126 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | 1.00 | . | 1.00 | . | . |
| L 127 | 013-00028-0001 | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . | 1.00 | . |
| L 128 | 013-00028-0001 | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . | . | . |
| L 129 | 999-09999-0098 | NOT USED | RF | . | . | . | . | . | X. |
| L 130 | 013-00028-0001 | FERR BEAD W/LEAD | EA | . | . | . | . | . | 1.00 |
| L 132 | 019-02084-0027 | CH 1.8UH 10% | EA | . | . | . | . | . | 1.00 |
| L 133 | 019-02084-0017 | CH .68UH 10% | EA | . | . | . | . | . | 1.00 |
| L 134 | 019-02099-0003 | CH .047UH 5% | EA | . | . | . | . | . | 1.00 |
| L 135 | 019-02084-0000 | CH .15UH 5% | EA | . | . | . | . | . | 1.00 |
| L 136 | 019-02084-0005 | CH .22UH 10% | EA | . | . | . | . | . | 1.00 |
| Q 101 | 007-00254-0001 | XSTR S PNP SOT-23 | EA | . | . | . | . | . | 1.00 |
| Q 102 | 999-09999-0098 | NOT USED | RF | . | . | . | . | . | X. |
| Q 103 | 999-09999-0098 | NOT USED | RF | . | . | . | . | . | X. |
| Q 104 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 105 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 106 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 107 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 108 | 007-00579-0000 | XSTR 2SK241 | EA | . | . | . | . | . | 1.00 |
| Q 109 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 110 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 111 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 112 | 007-00187-0002 | XSTR SOT-23 2N5089 | EA | . | . | . | . | . | 1.00 |
| Q 114 | 007-00467-0000 | XSTR S NPN MMBTA06 | EA | . | . | . | . | . | 1.00 |
| Q 115 | 007-00467-0000 | XSTR S NPN MMBTA06 | EA | . | . | . | . | . | 1.00 |
| Q 116 | 007-00813-0000 | XSTR NPN S MMBTA14 | EA | . | . | . | . | . | 1.00 |
| Q 117 | 007-00187-0002 | XSTR SOT-23 2N5089 | EA | . | . | . | . | . | 1.00 |
| Q 118 | 007-00280-0001 | XSTR E175/J175 | EA | . | . | . | . | . | 1.00 |
| Q 119 | 007-00280-0001 | XSTR E175/J175 | EA | . | . | . | . | . | 1.00 |
| Q 120 | 007-00280-0001 | XSTR E175/J175 | EA | . | . | . | . | . | 1.00 |
| Q 121 | 007-00813-0000 | XSTR NPN S MMBTA14 | EA | . | . | . | . | . | 1.00 |
| Q 123 | 007-00078-0001 | XSTR S NPN 2N3417 | EA | . | . | . | . | . | 1.00 |
| Q 126 | 007-00250-0000 | XSTR 2N4427 | EA | . | . | . | . | . | 1.00 |
| Q 127 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 128 | 007-00179-0001 | XSTR SOT23 2N3904 | EA | . | . | . | . | . | 1.00 |
| Q 129 | 007-00179-0001 | XSTR SOT23 2N3904 | EA | . | . | . | . | . | 1.00 |
| Q 131 | 007-00187-0002 | XSTR SOT-23 2N5089 | EA | . | . | . | . | . | 1.00 |
| Q 132 | 007-00195-0001 | XSTR MP SH10 | EA | . | . | . | . | . | 1.00 |
| Q 133 | 007-00179-0001 | XSTR SOT23 2N3904 | EA | . | . | . | . | . | 1.00 |
| Q 134 | 007-00187-0002 | XSTR SOT-23 2N5089 | EA | . | . | . | . | . | 1.00 |
| Q 135 | 007-00537-0000 | XSTR PNP MMBT5087 | EA | . | . | . | . | . | 1.00 |
| Q 136 | 007-00537-0000 | XSTR PNP MMBT5087 | EA | . | . | . | . | . | 1.00 |
| Q 137 | 007-00187-0002 | XSTR SOT-23 2N5089 | EA | . | . | . | . | . | 1.00 |
| Q 138 | 007-00179-0001 | XSTR SOT23 2N3904 | EA | . | . | . | . | . | 1.00 |
| Q 139 | 007-00383-0004 | SOT-23 2N2222A XST | EA | . | . | . | . | . | 1.00 |
| Q 140 | 007-00187-0002 | XSTR SOT-23 2N5089 | EA | . | . | . | . | . | 1.00 |
| Q 141 | 007-00187-0002 | XSTR SOT-23 2N5089 | EA | . | . | . | . | . | 1.00 |
| R 101 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | . | . | . | . | . | 1.00 |
| R 102 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | . | 1.00 |
| R 103 | 139-01211-0000 | RES CHIP 1.21KEW1% | EA | . | . | . | . | . | 1.00 |
| R 104 | 139-04750-0000 | RES CH 475 EW 1% | EA | . | 1.00 | . | 1.00 | . | . |
| R 105 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | . | 1.00 |
| R 106 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | . | 1.00 |
| R 107 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | . | 1.00 |
| R 108 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | . | 1.00 |
| R 109 | 139-00475-0000 | RES CH 47.5 EW 1% | EA | . | . | . | . | . | 1.00 |
| R 110 | 139-05622-0000 | RES CH 56.2K EW 1% | EA | . | . | . | . | . | 1.00 |
| R 111 | 139-04322-0000 | RES CHIP 43.2KEW1% | EA | . | . | . | . | . | 1.00 |
| R 112 | 139-05622-0000 | RES CH 56.2K EW 1% | EA | . | . | . | . | . | 1.00 |
| R 113 | 139-02000-0000 | RES CH 200 EW 1% | EA | . | . | . | . | . | 1.00 |
| R 114 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | . | 1.00 |
| R 115 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | . | 1.00 |
| R 116 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | . | 1.00 |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | |
|--------|----------------|--------------------|----|----|----------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 |
| R 117 | 139-05622-0000 | RES CH 56.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 118 | 139-05112-0000 | RES CHIP 51.1K 1% | EA | . | . | . | . | 1.00 | |
| R 119 | 139-03320-0000 | RES CHIP 332 EW 1% | EA | . | . | . | . | 1.00 | |
| R 120 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 121 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | 1.00 | |
| R 122 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | 1.00 | |
| R 123 | 139-00100-0000 | RES CHIP 10 EW 1% | EA | . | . | . | . | 1.00 | |
| R 124 | 139-01212-0000 | RES CHIP 12.1K1%EW | EA | . | . | . | . | 1.00 | |
| R 125 | 139-00100-0000 | RES CHIP 10 EW 1% | EA | . | . | . | . | 1.00 | |
| R 126 | 139-02212-0000 | RES CHIP 22.1KEW1% | EA | . | . | . | . | 1.00 | |
| R 127 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 128 | 139-01101-0000 | RES CH 1.1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 129 | 139-09090-0000 | RES CHIP 909 EW 1% | EA | . | . | . | . | 1.00 | |
| R 130 | 139-00562-0000 | RES CH 56.2 EW 1% | EA | . | . | . | . | 1.00 | |
| R 131 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 132 | 139-02002-0000 | RES CHIP 20.0KEW1% | EA | . | . | . | . | 1.00 | |
| R 133 | 139-03010-0000 | RES CHIP 301 EW 1% | EA | . | . | . | . | 1.00 | |
| R 134 | 139-01502-0000 | RES CHIP 15K EW 1% | EA | . | . | . | . | 1.00 | |
| R 135 | 139-01820-0000 | RES CH 182 EW 1% | EA | . | . | . | . | 1.00 | |
| R 136 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | 1.00 | |
| R 137 | 139-02000-0000 | RES CH 200 EW 1% | EA | . | . | . | . | 1.00 | |
| R 138 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | 1.00 | |
| R 139 | 139-04753-0000 | RES CH 475K EW 1% | EA | . | . | . | . | 1.00 | |
| R 140 | 139-03320-0000 | RES CHIP 332 EW 1% | EA | . | . | . | . | 1.00 | |
| R 141 | 139-04750-0000 | RES CH 475 EW 1% | EA | . | . | . | . | 1.00 | |
| R 142 | 139-03322-0000 | RES CH 33.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 143 | 139-08251-0000 | RES CH8.25 KEW 1% | EA | . | . | . | . | 1.00 | |
| R 144 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 145 | 139-05110-0000 | RES CH 511 EW 1% | EA | . | . | . | . | 1.00 | |
| R 146 | 139-03322-0000 | RES CH 33.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 147 | 139-03320-0000 | RES CHIP 332 EW 1% | EA | . | . | . | . | 1.00 | |
| R 148 | 139-08251-0000 | RES CH8.25 KEW 1% | EA | . | . | . | . | 1.00 | |
| R 149 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 150 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 151 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 152 | 139-03922-0000 | RES CH 39.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 153 | 139-01212-0000 | RES CHIP 12.1K1%EW | EA | . | . | . | . | 1.00 | |
| R 154 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 155 | 139-03922-0000 | RES CH 39.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 156 | 139-01212-0000 | RES CHIP 12.1K1%EW | EA | . | . | . | . | 1.00 | |
| R 157 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | 1.00 | |
| R 158 | 139-06812-0000 | RES 68.1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 159 | 139-02212-0000 | RES CHIP 22.1KEW1% | EA | . | . | . | . | 1.00 | |
| R 160 | 139-03322-0000 | RES CH 33.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 161 | 139-03921-0000 | RES CH 3.92K EW 1% | EA | . | . | . | . | 1.00 | |
| R 162 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 163 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 164 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 165 | 139-03322-0000 | RES CH 33.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 166 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | 1.00 | |
| R 167 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 168 | 139-01103-0000 | RES CHIP 110K EW1% | EA | . | . | . | . | 1.00 | |
| R 169 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | . | . | 1.00 | |
| R 170 | 139-01102-0000 | RES 11K EW 1% | EA | . | . | . | . | 1.00 | |
| R 171 | 139-03010-0000 | RES CHIP 301 EW 1% | EA | . | . | . | . | 1.00 | |
| R 172 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| R 173 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 174 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 175 | 139-03652-0000 | RES CHIP 36.5KEW1% | EA | . | . | . | . | 1.00 | |
| R 176 | 133-00351-0004 | POTENTIOMETER 10K | EA | . | . | . | . | 1.00 | |
| R 177 | 139-02742-0000 | RES CHIP 27.4KEW1% | EA | . | . | . | . | 1.00 | |
| R 178 | 139-05111-0000 | RES CHIP 5.11KEW1% | EA | . | . | . | . | 1.00 | |
| R 179 | 139-05111-0000 | RES CHIP 5.11KEW1% | EA | . | . | . | . | 1.00 | |
| R 180 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 181 | 139-04753-0000 | RES CH 475K EW 1% | EA | . | . | . | . | 1.00 | |
| R 182 | 139-07500-0000 | RES CHIP 750 EW 1% | EA | . | . | . | . | 1.00 | |
| R 183 | 139-03922-0000 | RES CH 39.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 184 | 133-00351-0005 | POTENTIOMETER 22K | EA | . | . | . | . | 1.00 | |
| R 185 | 139-03322-0000 | RES CH 33.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 186 | 139-02002-0000 | RES CHIP 20.0KEW1% | EA | . | . | . | . | 1.00 | |
| R 187 | 139-01242-0000 | RES CHIP 12.4KEW1% | EA | . | . | . | . | 1.00 | |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | |
|--------|----------------|--------------------|----|------|----------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 |
| R 188 | 139-01822-0000 | RES CHIP 16.2KEW1% | EA | . | . | . | . | 1.00 | |
| R 189 | 133-00351-0004 | POTENTIOMETER 10K | EA | . | . | . | . | 1.00 | |
| R 190 | 139-02212-0000 | RES CHIP 22.1KEW1% | EA | . | . | . | . | 1.00 | |
| R 191 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 192 | 139-05620-0000 | RES CH 562 EW 1% | EA | . | . | . | . | 1.00 | |
| R 193 | 131-00012-0033 | RES CF 1.2 HW 5% | EA | . | . | . | . | 1.00 | |
| R 194 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 195 | 139-05110-0000 | RES CH 511 EW 1% | EA | . | . | . | . | 1.00 | |
| R 196 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | . | . | 1.00 | |
| R 197 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| R 198 | 139-02000-0000 | RES CH 200 EW 1% | EA | . | . | . | . | 1.00 | |
| R 199 | 139-06193-0000 | RES CH 619KEW 1% | EA | . | . | . | . | 1.00 | |
| R 200 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | . | . | 1.00 | |
| R 201 | 139-02001-0000 | RES CHIP 2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 202 | 139-02743-0000 | RES CH 274K EW 1% | EA | . | . | . | . | 1.00 | |
| R 203 | 139-04750-0000 | RES CH 475 EW 1% | EA | 1.00 | . | 1.00 | . | . | |
| R 204 | 139-02431-0000 | RES CH 2.43K EW 1% | EA | . | . | . | . | 1.00 | |
| R 205 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | . | . | 1.00 | |
| R 206 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | . | . | 1.00 | |
| R 207 | 139-09091-0000 | RES CH 9.09K EW 1% | EA | . | . | . | . | 1.00 | |
| R 208 | 139-01332-0000 | RES CHIP 13.3KEW1% | EA | . | . | . | . | 1.00 | |
| R 209 | 139-04753-0000 | RES CH 475K EW 1% | EA | . | . | . | . | 1.00 | |
| R 210 | 139-02741-0000 | RES CH 2.74K EW 1% | EA | . | . | . | . | 1.00 | |
| R 211 | 139-02003-0000 | RES CHIP 200KEW1% | EA | . | . | . | . | 1.00 | |
| R 212 | 139-04753-0000 | RES CH 475K EW 1% | EA | . | . | . | . | 1.00 | |
| R 213 | 139-02212-0000 | RES CHIP 22.1KEW1% | EA | . | . | . | . | 1.00 | |
| R 214 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| R 215 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 216 | 139-01102-0000 | RES 11K EW 1% | EA | . | . | . | . | 1.00 | |
| R 217 | 139-03010-0000 | RES CHIP 301 EW 1% | EA | . | . | . | . | 1.00 | |
| R 218 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 219 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 220 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 221 | 133-00351-0004 | POTENTIOMETER 10K | EA | . | . | . | . | 1.00 | |
| R 222 | 139-01501-0000 | RES CH 1.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 223 | 139-03922-0000 | RES CH 39.2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 224 | 130-05101-0033 | RES CH 100 QW 5% | EA | . | . | . | . | 1.00 | |
| R 225 | 139-04750-0000 | RES CH 475 EW 1% | EA | . | . | . | . | 1.00 | |
| R 226 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 227 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 228 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 229 | 139-00150-0000 | RES CH 15 EW 1% | EA | . | . | . | . | 1.00 | |
| R 230 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | . | . | 1.00 | |
| R 231 | 139-01004-0000 | RES CHIP 1M EW 1% | EA | . | . | . | . | 1.00 | |
| R 232 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 233 | 139-02432-0000 | RES CH 24.3K EW 1% | EA | . | . | . | . | 1.00 | |
| R 234 | 139-02432-0000 | RES CH 24.3K EW 1% | EA | . | . | . | . | 1.00 | |
| R 235 | 139-03011-0000 | RES CH 3.01K EW 1% | EA | . | . | . | . | 1.00 | |
| R 236 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 237 | 139-04753-0000 | RES CH 475K EW 1% | EA | . | . | . | . | 1.00 | |
| R 238 | 139-04753-0000 | RES CH 475K EW 1% | EA | . | . | . | . | 1.00 | |
| R 239 | 139-02212-0000 | RES CHIP 22.1KEW1% | EA | . | . | . | . | 1.00 | |
| R 240 | 139-00221-0000 | RES CH 22.1 EW 1% | EA | . | . | . | . | 1.00 | |
| R 241 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 242 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 243 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 244 | 139-02432-0000 | RES CH 24.3K EW 1% | EA | . | . | . | . | 1.00 | |
| R 245 | 139-05621-0000 | RES CHIP 5.62KEW1% | EA | . | . | . | . | 1.00 | |
| R 246 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 247 | 139-02000-0000 | RES CH 200 EW 1% | EA | . | . | . | . | 1.00 | |
| R 248 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | . | 1.00 | . | 1.00 | . | |
| R 249 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | 1.00 | . | 1.00 | . | . | |
| R 250 | 139-02212-0000 | RES CHIP 22.1KEW1% | EA | 1.00 | 1.00 | 1.00 | 1.00 | . | |
| R 251 | 139-01502-0000 | RES CHIP 15K EW 1% | EA | . | 1.00 | . | 1.00 | . | |
| R 251 | 139-09091-0000 | RES CH 9.09K EW 1% | EA | 1.00 | . | 1.00 | . | . | |
| R 252 | 131-00162-0033 | RES CF 1.6K HW 5% | EA | . | 1.00 | . | 1.00 | . | |
| R 252 | 131-00182-0033 | RES CF 1.8K HW 5% | EA | 1.00 | . | 1.00 | . | . | |
| R 253 | 139-01500-0000 | RES CH 150 EW 1% | EA | . | . | . | . | 1.00 | |
| R 255 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| R 256 | 133-00351-0004 | POTENTIOMETER 10K | EA | 1.00 | . | 1.00 | . | . | |
| R 256 | 133-00351-0005 | POTENTIOMETER 22K | EA | . | 1.00 | . | 1.00 | . | |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | |
|--------|----------------|--------------------|----|------|----------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 |
| R 257 | 139-03321-0000 | RES CHIP 3.32K EW | EA | . | . | . | . | 1.00 | |
| R 258 | 139-01502-0000 | RES CHIP 15K EW 1% | EA | . | . | . | . | 1.00 | |
| R 259 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . | . | |
| R 260 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . | . | |
| R 261 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | . | 1.00 | . | 1.00 | . | |
| R 262 | 139-00100-0000 | RES CHIP 10 EW 1% | EA | . | . | . | . | 1.00 | |
| R 263 | 139-00100-0000 | RES CHIP 10 EW 1% | EA | . | . | . | . | 1.00 | |
| R 264 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | . | . | 1.00 | |
| R 265 | 139-04751-0000 | RES CH 4.75K EW 1% | EA | . | . | . | . | 1.00 | |
| R 266 | 139-01821-0000 | RES CHIP 1.82KEW1% | EA | . | . | . | . | 1.00 | |
| R 267 | 133-00351-0003 | POTENTIOMETER 4.7K | EA | . | . | . | . | 1.00 | |
| R 268 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 269 | 139-02001-0000 | RES CHIP 2K EW 1% | EA | . | . | . | . | 1.00 | |
| R 270 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 271 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| R 272 | 132-05051-0000 | RES WW .15 2W 5% | EA | . | 1.00 | . | 1.00 | . | |
| R 273 | 132-05051-0000 | RES WW .15 2W 5% | EA | . | 1.00 | . | 1.00 | . | |
| R 274 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 275 | 139-02210-0000 | RES CH 221 EW 1% | EA | . | . | . | . | 1.00 | |
| R 276 | 139-03651-0000 | RESCH 3.65K 8EW 1% | EA | . | . | . | . | 1.00 | |
| R 277 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 278 | 139-03321-0000 | RES CHIP 3.32K EW | EA | . | . | . | . | 1.00 | |
| R 279 | 139-02210-0000 | RES CH 221 EW 1% | EA | . | . | . | . | 1.00 | |
| R 280 | 139-06810-0000 | RES CH 681 EW 1% | EA | . | . | . | . | 1.00 | |
| R 281 | 139-02210-0000 | RES CH 221 EW 1% | EA | . | . | . | . | 1.00 | |
| R 282 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 283 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 284 | 139-03321-0000 | RES CHIP 3.32K EW | EA | . | . | . | . | 1.00 | |
| R 285 | 999-09999-0098 | NOT USED | RF | . | . | . | . | X. | |
| R 286 | 139-04753-0000 | RES CH 475K EW 1% | EA | . | . | . | . | 1.00 | |
| R 287 | 139-01502-0000 | RES CHIP 15K EW 1% | EA | . | . | . | . | 1.00 | |
| R 288 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 289 | 139-05620-0000 | RES CH 562 EW 1% | EA | . | . | . | . | 1.00 | |
| R 290 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 291 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 292 | 139-01000-0000 | RES CHIP 100 EW 1% | EA | . | . | . | . | 1.00 | |
| R 293 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 294 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 295 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 296 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | . | . | . | . | 1.00 | |
| R 297 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 298 | 139-04750-0000 | RES CH 475 EW 1% | EA | . | . | . | . | 1.00 | |
| R 299 | 139-02210-0000 | RES CH 221 EW 1% | EA | . | . | . | . | 1.00 | |
| R 1001 | 139-02432-0000 | RES CH 24.3K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1002 | 139-03011-0000 | RES CH 3.01K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1003 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1004 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | 1.00 | |
| R 1005 | 139-05110-0000 | RES CH 511 EW 1% | EA | . | . | . | . | 1.00 | |
| R 1006 | 139-00200-0000 | RES CH 20.0 EW 1% | EA | . | . | . | . | 1.00 | |
| R 1007 | 139-04752-0000 | RES CH 47.5K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1009 | 133-00351-0004 | POTENTIOMETER 10K | EA | . | . | . | . | 1.00 | |
| R 1010 | 139-01001-0000 | RES CHIP 1K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1011 | 139-02211-0000 | RES CH 2.21K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1012 | 139-02741-0000 | RES CH 2.74K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1013 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1014 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1015 | 139-01002-0000 | RES CHIP 10K EW 1% | EA | . | . | . | . | 1.00 | |
| R 1016 | 139-02210-0000 | RES CH 221 EW 1% | EA | . | . | . | . | 1.00 | |
| R 1017 | 139-01211-0000 | RES CHIP 1.21KEW1% | EA | . | 1.00 | . | 1.00 | . | |
| R 1018 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . | . | |
| R 1019 | 139-00750-0000 | RES CH 75.0 EW 1% | EA | . | . | . | . | 1.00 | |
| R 1020 | 139-01003-0000 | RES CHIP 100KEW1% | EA | . | . | . | . | 1.00 | |
| R 1021 | 130-05027-0033 | RES CH 2.7 QW 5% | EA | . | . | . | . | 1.00 | |
| R 1022 | 130-05000-0025 | RES CHIP 0 EW CJ | EA | . | . | . | . | 1.00 | |
| R 1023 | 130-05027-0033 | RES CH 2.7 QW 5% | EA | . | . | . | . | 1.00 | |
| REF 1 | 300-07799-0000 | MAIN BD ASSY 14V | RF | X. | . | X. | . | . | |
| REF 1 | 300-07799-0001 | MAIN BD ASSY 28V | RF | . | X. | . | X. | . | |
| REF 2 | 002-07799-0000 | SCH MAIN BD | RF | . | . | . | . | X. | |

THIS PAGE CONTAINS OLD REVISION BOMS, FOR REFERENCE ONLY.

| SYMBOL | PART NUMBER | DESCRIPTION | A | UM | QUANTITY | | | | | |
|--------|-------------|----------------|---|-------------------|----------|------|------|------|------|------|
| | | | | | 0000 | 0001 | 0002 | 0003 | 0099 | |
| T | 101 | 019-08079-0000 | | XFMR IF | EA | . | . | . | . | 1.00 |
| T | 102 | 019-08080-0000 | | XFMR IF 15PF | EA | . | . | . | . | 1.00 |
| T | 103 | 019-08102-0000 | | XFMR IF 27PF | EA | . | . | . | . | 1.00 |
| T | 104 | 019-08103-0000 | | XFMR IF | EA | . | . | . | . | 1.00 |
| T | 105 | 019-02328-0081 | | 3.5 TURN CT | EA | . | . | . | . | 1.00 |
| T | 106 | 999-09999-0098 | | NOT USED | RF | . | . | . | . | X. |
| T | 107 | 019-05083-0000 | | XFMR AUD | EA | . | . | . | . | 1.00 |
| T | 108 | 019-05084-0001 | | XFMR MOD 900T | EA | . | . | . | . | 1.00 |
| T | 109 | 999-09999-0098 | | NOT USED | RF | . | . | . | . | X. |
| T | 110 | 999-09999-0098 | | NOT USED | RF | . | . | . | . | X. |
| TP | 101 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 102 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 103 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 104 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 105 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 106 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 107 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 108 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 109 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 110 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 112 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 114 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| TP | 115 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | . | 1.00 |
| Y | 101 | 044-00272-0000 | | 3.975 MHZ X-TAL | EA | . | . | . | . | 1.00 |

THIS PAGE RESERVED

200-07799-0020 97A MNBD 25K FUJI REV D
 200-07799-0021 96A MN BD 25K FUJI REV D
 200-07799-0022 97A MN BD 50K FUJI REV B
 200-07799-0099 COMMON BOM REV CK

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| A101 | 200-08777-0010 | | SONY REPLACEMENT | EA | 1.00 | 1.00 | 1.00 | . |
| C101 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C102 | 106-05399-0020 | | CH 3.9PF NPO/100V | EA | . | . | . | 1.00 |
| C103 | 106-05479-0020 | | CH 4.7PF NPO/100V | EA | . | . | . | 1.00 |
| C104 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C105 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C107 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | . | . | 1.00 |
| C108 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C109 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C110 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C111 | 106-04682-0057 | | CAPCH6800PFX7R/100 | EA | . | . | . | 1.00 |
| C112 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C113 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C114 | 106-05689-0020 | | CH 6.8PF NPO/100V | EA | . | . | . | 1.00 |
| C115 | 106-05030-0020 | | CH 3.0PF NPO/100V | EA | . | . | . | 1.00 |
| C116 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C117 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C118 | 106-05060-0020 | | CH 6PF NPO 100V | EA | . | . | . | 1.00 |
| C119 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| C120 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C121 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C122 | 106-00146-1R2B | | CAP PORC 1.2PF 500 | EA | 1.00 | 1.00 | . | . |
| C123 | 106-00146-1R2B | | CAP PORC 1.2PF 500 | EA | 1.00 | 1.00 | . | . |
| C124 | 106-00146-1R2B | | CAP PORC 1.2PF 500 | EA | 1.00 | 1.00 | . | . |
| C125 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C126 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C127 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C128 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C129 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C130 | 106-04392-0057 | | CAPCH3900PFX7R/100 | EA | . | . | . | 1.00 |
| C131 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C132 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | . | . | 1.00 |
| C133 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | . | . | 1.00 |
| C134 | 102-00085-0000 | | CAP VAR SURF MTG | EA | . | . | . | 1.00 |
| C135 | 097-00108-0020 | | CAP EL 0.47UF | EA | . | . | . | 1.00 |
| C136 | 106-05020-0020 | | CH 2PF NPO 100V | EA | . | . | . | 1.00 |
| C137 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C138 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | . | . | . | 1.00 |
| C139 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C140 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C144 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C145 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C146 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | . | . | 1.00 |
| C147 | 106-05020-0020 | | CH 2PF NPO 100V | EA | . | . | . | 1.00 |
| C148 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C149 | 106-04820-0026 | | CAP CH82PFNPO/100V | EA | . | . | . | 1.00 |
| C150 | 106-04330-0026 | | CH 33PF NPO/100V | EA | . | . | . | 1.00 |
| C151 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C152 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C153 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C154 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | . | . | 1.00 |
| C155 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | . | . | 1.00 |
| C156 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C157 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C158 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C159 | 106-04151-0026 | | CH 150PF NPO/100V | EA | . | . | . | 1.00 |
| C160 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C161 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C162 | 106-04154-0078 | | CAP CH 150KZ5U/50V | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| C163 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C164 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C165 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C166 | 096-01082-0057 | | CAP TN 1UF 35V | EA | . | . | . | 1.00 |
| C167 | 097-00149-0000 | | CAP AL 2200UF 25V | EA | 1.00 | . | 1.00 | . |
| C167 | 097-00149-0001 | | CAP AL 1000UF 50V | EA | . | 1.00 | . | . |
| C168 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C169 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C170 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C171 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | . | . | 1.00 |
| C172 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C173 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C174 | 111-00001-0068 | | CAP CR .068UF 50V | EA | . | . | . | 1.00 |
| C175 | 111-00001-0003 | | CAP CR .22UF 50V | EA | . | . | . | 1.00 |
| C176 | 111-00001-0003 | | CAP CR .22UF 50V | EA | . | . | . | 1.00 |
| C177 | 097-00108-0018 | | CAP EL 0.22UF | EA | . | . | . | 1.00 |
| C178 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C179 | 097-00108-0014 | | CAP EL 4.7UF 35V | EA | . | . | . | 1.00 |
| C180 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C181 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C182 | 097-00108-0023 | | CAP EL 3.3UF | EA | . | . | . | 1.00 |
| C183 | 097-00108-0020 | | CAP EL 0.47UF | EA | . | . | . | 1.00 |
| C184 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C185 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C186 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C187 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C188 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C189 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C190 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C191 | 097-00108-0022 | | CAP EL 2.2UF | EA | . | . | . | 1.00 |
| C192 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| C193 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C194 | 111-00001-0001 | | CAP CR .1UF 50V | EA | . | . | . | 1.00 |
| C195 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C196 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | . | . | 1.00 |
| C197 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C198 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C199 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C200 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C201 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C202 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C203 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C204 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C205 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C206 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C207 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C208 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C209 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C210 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C211 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C212 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C213 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C214 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C215 | 097-00108-0015 | | CAP EL 10UF 35V | EA | . | 1.00 | . | . |
| C216 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C217 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C218 | 106-04222-0057 | | CAPCH2200PFX7R/100 | EA | . | . | . | 1.00 |
| C219 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C220 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C221 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | . | . | 1.00 |
| C222 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C223 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| C224 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| C225 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C226 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | . | . | 1.00 |
| C227 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C228 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C229 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C230 | 111-00001-0006 | | CAP CR .47UF 50V | EA | . | . | . | 1.00 |
| C231 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | . | . | 1.00 |
| C232 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C233 | 106-04101-0026 | | CH 100PF NPO/100V | EA | . | . | . | 1.00 |
| C236 | 111-00001-0026 | | CAP CR .33UF 50V | EA | . | . | . | 1.00 |
| C237 | 096-01082-0040 | | CAP TN 3.3UF 35V | EA | . | . | . | 1.00 |
| C238 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C239 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C240 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| C241 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C242 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C243 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | . | . | 1.00 |
| C244 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C245 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C246 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C247 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C248 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C249 | 106-04390-0026 | | CH 39PF NPO/100V | EA | . | . | . | 1.00 |
| C250 | 097-00108-0023 | | CAP EL 3.3UF | EA | . | . | . | 1.00 |
| C251 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C252 | 106-04391-0026 | | CH 390PF NPO/100V | EA | . | . | . | 1.00 |
| C253 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C254 | 106-04270-0026 | | CH 27PF NPO/100V | EA | 1.00 | 1.00 | 1.00 | . |
| C255 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C256 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C257 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C258 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C259 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C260 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | . | . | . | 1.00 |
| C261 | 106-04821-0016 | | CAP CH820PFNPO/50V | EA | . | . | . | 1.00 |
| C262 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C263 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C264 | 106-04821-0016 | | CAP CH820PFNPO/50V | EA | . | . | . | 1.00 |
| C265 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C267 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C268 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C269 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | . | . | 1.00 |
| C270 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | . | . | 1.00 |
| C271 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | . | . | 1.00 |
| C272 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | . | . | 1.00 |
| C273 | 106-04829-0020 | | CAP CH 8.2 NPO/100 | EA | . | . | . | 1.00 |
| C274 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C281 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C282 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | . | . | 1.00 |
| C284 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | . | . | 1.00 |
| C285 | 096-01082-0002 | | CAP TN 1UF 35V | EA | . | . | . | 1.00 |
| C286 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | . | . | 1.00 |
| C287 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | . | . | 1.00 |
| C288 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | 1.00 | 1.00 | 1.00 | . |
| CR101 | 007-04020-0005 | | MS5 VARACTOR DIODE | EA | . | . | . | 1.00 |
| CR102 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | . | . | 1.00 |
| CR104 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | . | . | 1.00 |
| CR105 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR106 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR107 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR108 | 007-05039-0002 | | DIO Z 40.2V | EA | . | . | . | 1.00 |
| CR109 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR110 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| CR111 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| CR112 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | . | . | 1.00 |
| CR113 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR114 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | . | . | 1.00 |
| CR115 | 007-05117-0017 | | DIO Z 16V SOT | EA | 1.00 | 1.00 | 1.00 | . |
| CR116 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| CR117 | 007-06228-0000 | | RF SWITCHING DIODE | EA | . | . | . | 1.00 |
| CR118 | 007-05117-0023 | | DIO Z 30V SOT | EA | . | . | . | 1.00 |
| CR119 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| CR120 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| CR121 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| CR122 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | . | . | . | 1.00 |
| CR123 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | . | 1.00 | . | . |
| CR124 | 007-06105-0000 | | DIO HV FDH444 | EA | . | . | . | 1.00 |
| CR125 | 007-06222-0000 | | DIO DAN202K | EA | . | . | . | 1.00 |
| F101 | 036-00014-0000 | | FUSE 3AG 250V 10A | EA | . | . | . | 1.00 |
| FL101 | 017-00069-0000 | | FLTR XTAL 8P | EA | 1.00 | 1.00 | . | . |
| FL101 | 017-00076-0000 | | FLTR XTAL 11.4MHZ | EA | . | . | 1.00 | . |
| I101 | 120-03020-0001 | | IC IF AMP S0 | EA | . | . | . | 1.00 |
| I102 | 120-03020-0001 | | IC IF AMP S0 | EA | . | . | . | 1.00 |
| I104 | 120-03094-0032 | | IC LM340LAZ-5.0 | EA | . | . | . | 1.00 |
| I105 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | . | . | 1.00 |
| I106 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | . | . | 1.00 |
| I107 | 120-03127-0011 | | IC LM2903 S0 PKG | EA | . | . | . | 1.00 |
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | . | . | 1.00 |
| I109 | 120-03094-0032 | | IC LM340LAZ-5.0 | EA | . | . | . | 1.00 |
| I110 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| I111 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | . | . | 1.00 |
| I112 | 120-03190-0000 | | AUDIO AMP LM1877N- | EA | . | . | . | 1.00 |
| I113 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | . | . | 1.00 |
| L101 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | . | . | 1.00 |
| L102 | 019-02084-0024 | | CH 1.5UH 5% | EA | . | . | . | 1.00 |
| L103 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | . | . | 1.00 |
| L104 | 019-02084-0027 | | CH 1.8UH 10% | EA | . | . | . | 1.00 |
| L105 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | . | . | 1.00 |
| L106 | 019-02084-0034 | | CH 3.9UH 5% | EA | . | . | . | 1.00 |
| L107 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | . | . | 1.00 |
| L108 | 019-02084-0021 | | CH 1UH 10% | EA | . | . | . | 1.00 |
| L109 | 019-02209-0000 | | CHOKE FILTER | EA | . | . | . | 1.00 |
| L110 | 019-08078-0000 | | COIL TUN 20MH | EA | . | . | . | 1.00 |
| L111 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L112 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L113 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L114 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 | . | . |
| L115 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L116 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L117 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L118 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 | . | . |
| L119 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| L120 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L121 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L122 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L123 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L124 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L125 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . |
| L126 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 | . | . |
| L127 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . |
| L128 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . | 1.00 | . |
| L129 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| L130 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | . | . | 1.00 |
| L132 | 019-02084-0027 | | CH 1.8UH 10% | EA | . | . | . | 1.00 |
| L133 | 019-02084-0021 | | CH 1UH 10% | EA | . | . | . | 1.00 |
| L134 | 019-02099-0003 | | CH .047UH 5% | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| L135 | 019-02084-0000 | | CH .15UH 5% | EA | . | . | . | 1.00 |
| L136 | 019-02084-0005 | | CH .22UH 10% | EA | . | . | . | 1.00 |
| L137 | 019-02084-0009 | | CH .33UH 10% | EA | . | . | . | 1.00 |
| Q101 | 007-00254-0001 | | XSTR S PNP SOT-23 | EA | . | . | . | 1.00 |
| Q102 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| Q103 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| Q104 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q105 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q106 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q107 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q108 | 007-00579-0000 | | XSTR 2SK241 | EA | . | . | . | 1.00 |
| Q109 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q110 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q111 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q112 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q114 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | . | . | 1.00 |
| Q115 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | . | . | 1.00 |
| Q116 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | . | . | . | 1.00 |
| Q117 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q118 | 007-00280-0001 | | XSTR E175/J175 | EA | . | . | . | 1.00 |
| Q119 | 007-00280-0001 | | XSTR E175/J175 | EA | . | . | . | 1.00 |
| Q120 | 007-00280-0001 | | XSTR E175/J175 | EA | . | . | . | 1.00 |
| Q121 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | . | . | . | 1.00 |
| Q123 | 007-00078-0001 | | XSTR S NPN 2N3417 | EA | . | . | . | 1.00 |
| Q126 | 007-00250-0000 | | XSTR 2N4427 | EA | . | . | . | 1.00 |
| Q127 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q128 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | . | 1.00 |
| Q129 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | . | 1.00 |
| Q131 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q132 | 007-00195-0001 | | XSTR MPSH10 | EA | . | . | . | 1.00 |
| Q133 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | . | 1.00 |
| Q134 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q135 | 007-00537-0000 | | XSTR PNP MMBT5087 | EA | . | . | . | 1.00 |
| Q136 | 007-00537-0000 | | XSTR PNP MMBT5087 | EA | . | . | . | 1.00 |
| Q137 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q138 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | . | . | 1.00 |
| Q139 | 007-00383-0004 | | SOT-23 2N2222A XST | EA | . | . | . | 1.00 |
| Q140 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| Q141 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | . | . | 1.00 |
| R1001 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | . | . | 1.00 |
| R1002 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | . | . | 1.00 |
| R1003 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R1004 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R1005 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | . | . | 1.00 |
| R1006 | 139-00200-0000 | | RES CH 20.0 EW 1% | EA | . | . | . | 1.00 |
| R1007 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R1009 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | . | . | 1.00 |
| R101 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R1010 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R1011 | 139-02211-0000 | | RES CH 2.21K EW 1% | EA | . | . | . | 1.00 |
| R1012 | 139-08661-0000 | | RES CH 8.66K EW 1% | EA | . | . | . | 1.00 |
| R1013 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R1014 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R1015 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R1016 | 139-06811-0000 | | RES CH 6.81K EW 1% | EA | 1.00 | 1.00 | 1.00 | . |
| R1017 | 139-01211-0000 | | RES CHIP1.21KEW1% | EA | . | 1.00 | . | . |
| R1018 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . |
| R1019 | 139-00750-0000 | | RES CH 75.0 EW 1% | EA | . | . | . | 1.00 |
| R102 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R1020 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R1021 | 130-05027-0033 | | RES CH 2.7 QW 5% | EA | . | . | . | 1.00 |
| R1022 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R1023 | 130-05027-0033 | | RES CH 2.7 QW 5% | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| R1024 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R1025 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R103 | 139-01211-0000 | | RES CHIP1.21KEW1% | EA | . | . | . | 1.00 |
| R104 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | 1.00 | . | . |
| R105 | 139-02671-0000 | | RES CH 2.67K EW 1% | EA | . | . | . | 1.00 |
| R106 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R107 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R108 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R109 | 139-00475-0000 | | RES CH 47.5 EW 1% | EA | . | . | . | 1.00 |
| R110 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | . | . | 1.00 |
| R111 | 139-04322-0000 | | RES CHIP 43.2KEW1% | EA | . | . | . | 1.00 |
| R112 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | . | . | 1.00 |
| R113 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | . | . | 1.00 |
| R114 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R115 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R116 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R117 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | . | . | 1.00 |
| R118 | 139-05112-0000 | | RES CHIP 51.1K 1% | EA | . | . | . | 1.00 |
| R119 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R120 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R121 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R122 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R123 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | . | 1.00 |
| R124 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | . | . | 1.00 |
| R125 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | . | 1.00 |
| R126 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R127 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R128 | 139-01101-0000 | | RES CH 1.1K EW 1% | EA | . | . | . | 1.00 |
| R129 | 139-09090-0000 | | RES CHIP 909 EW 1% | EA | . | . | . | 1.00 |
| R130 | 139-00562-0000 | | RES CH 56.2 EW 1% | EA | . | . | . | 1.00 |
| R131 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R132 | 139-02002-0000 | | RES CHIP 20.0KEW1% | EA | . | . | . | 1.00 |
| R133 | 139-03920-0000 | | 392 OHM 1/8W 1% | EA | . | . | . | 1.00 |
| R134 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | . | . | 1.00 |
| R135 | 139-01820-0000 | | RES CH 182 EW 1% | EA | . | . | . | 1.00 |
| R136 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R137 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | . | . | 1.00 |
| R138 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R139 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R140 | 139-03320-0000 | | RES CHIP 332 EW 1% | EA | . | . | . | 1.00 |
| R141 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | . | . | 1.00 |
| R142 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R143 | 139-08251-0000 | | RES CH 8.25K EW 1% | EA | . | . | . | 1.00 |
| R144 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R145 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | . | . | 1.00 |
| R146 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R147 | 139-03320-0000 | | RES CHIP 332 EW 1% | EA | . | . | . | 1.00 |
| R148 | 139-08251-0000 | | RES CH 8.25K EW 1% | EA | . | . | . | 1.00 |
| R149 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R150 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R151 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R152 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | . | 1.00 |
| R153 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | . | . | 1.00 |
| R154 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R155 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | . | 1.00 |
| R156 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | . | . | 1.00 |
| R157 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R158 | 139-06812-0000 | | RES 68.1K EW 1% | EA | . | . | . | 1.00 |
| R159 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R160 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R161 | 139-03921-0000 | | RES CH 3.92K EW 1% | EA | . | . | . | 1.00 |
| R162 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R163 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| R164 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R165 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R166 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | . | . | 1.00 |
| R167 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R168 | 139-01103-0000 | | RES CHIP 110K EW1% | EA | . | . | . | 1.00 |
| R169 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R170 | 139-01102-0000 | | RES 11K EW 1% | EA | . | . | . | 1.00 |
| R171 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | . | . | . | 1.00 |
| R172 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R173 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R174 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R175 | 139-03652-0000 | | RES CHIP 36.5KEW1% | EA | . | . | . | 1.00 |
| R176 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | . | . | 1.00 |
| R177 | 139-02742-0000 | | RES CHIP 27.4KEW1% | EA | . | . | . | 1.00 |
| R178 | 139-05111-0000 | | RES CHIP 5.11KEW1% | EA | . | . | . | 1.00 |
| R179 | 139-05111-0000 | | RES CHIP 5.11KEW1% | EA | . | . | . | 1.00 |
| R180 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R181 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R182 | 139-07500-0000 | | RES CHIP 750 EW 1% | EA | . | . | . | 1.00 |
| R183 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | . | 1.00 |
| R184 | 133-00351-0005 | | POTENTIOMETER 22K | EA | . | . | . | 1.00 |
| R185 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | . | . | 1.00 |
| R186 | 139-02002-0000 | | RES CHIP 20.0KEW1% | EA | . | . | . | 1.00 |
| R187 | 139-01242-0000 | | RES CHIP 12.4KEW1% | EA | . | . | . | 1.00 |
| R188 | 139-01822-0000 | | RES CHIP 18.2KEW1% | EA | . | . | . | 1.00 |
| R189 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | . | . | 1.00 |
| R190 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R191 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R192 | 139-05620-0000 | | RES CH 562 EW 1% | EA | . | . | . | 1.00 |
| R193 | 131-00012-0033 | | RES CF 1.2 HW 5% | EA | . | . | . | 1.00 |
| R194 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R195 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | . | . | 1.00 |
| R196 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R197 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R198 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | . | . | 1.00 |
| R199 | 139-06193-0000 | | RES CH 619KEW 1% | EA | . | . | . | 1.00 |
| R200 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R201 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | . | . | 1.00 |
| R202 | 139-02743-0000 | | RES CH 274K EW 1% | EA | . | . | . | 1.00 |
| R203 | 139-04750-0000 | | RES CH 475 EW 1% | EA | 1.00 | . | 1.00 | . |
| R204 | 139-02431-0000 | | RES CH 2.43K EW 1% | EA | . | . | . | 1.00 |
| R205 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R206 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R207 | 139-09091-0000 | | RES CH 9.09K EW 1% | EA | . | . | . | 1.00 |
| R208 | 139-01332-0000 | | RES CHIP 13.3KEW1% | EA | . | . | . | 1.00 |
| R209 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R210 | 139-02741-0000 | | RES CH 2.74K EW 1% | EA | . | . | . | 1.00 |
| R211 | 139-02003-0000 | | RES CHIP 200KEW1% | EA | . | . | . | 1.00 |
| R212 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R213 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R214 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R215 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R216 | 139-01102-0000 | | RES 11K EW 1% | EA | . | . | . | 1.00 |
| R217 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | . | . | . | 1.00 |
| R218 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R219 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R220 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R221 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | . | . | 1.00 |
| R222 | 139-01501-0000 | | RES CH 1.5K EW 1% | EA | . | . | . | 1.00 |
| R223 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | . | . | 1.00 |
| R224 | 130-05101-0033 | | RES CH 100 QW 5% | EA | . | . | . | 1.00 |
| R225 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | . | . | 1.00 |
| R226 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| R227 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R228 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R229 | 139-00150-0000 | | RES CH 15 EW 1% | EA | . | . | . | 1.00 |
| R230 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | . | . | 1.00 |
| R231 | 139-01004-0000 | | RES CHIP 1M EW 1% | EA | . | . | . | 1.00 |
| R232 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R233 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | . | . | 1.00 |
| R234 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | . | . | 1.00 |
| R235 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | . | . | 1.00 |
| R236 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R237 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R238 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R239 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | . | . | 1.00 |
| R240 | 139-00221-0000 | | RES CH 22.1 EW 1% | EA | . | . | . | 1.00 |
| R241 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R242 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R243 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R244 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | . | . | 1.00 |
| R245 | 139-05621-0000 | | RES CHIP 5.62KEW1% | EA | . | . | . | 1.00 |
| R246 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R247 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | . | . | 1.00 |
| R248 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 | . | . |
| R249 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | 1.00 | . | 1.00 | . |
| R250 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | 1.00 | 1.00 | 1.00 | . |
| R251 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | 1.00 | . | . |
| R251 | 139-09091-0000 | | RES CH 9.09K EW 1% | EA | 1.00 | . | 1.00 | . |
| R252 | 131-00162-0033 | | RES CF 1.6K HW 5% | EA | . | 1.00 | . | . |
| R252 | 131-00182-0033 | | RES CF 1.8K HW 5% | EA | 1.00 | . | 1.00 | . |
| R253 | 139-01500-0000 | | RES CH 150 EW 1% | EA | . | . | . | 1.00 |
| R254 | 139-06191-0000 | | RES CH 6.19KEW 1% | EA | . | . | . | 1.00 |
| R255 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R256 | 133-00351-0004 | | POTENTIOMETER 10K | EA | 1.00 | . | 1.00 | . |
| R256 | 133-00351-0005 | | POTENTIOMETER 22K | EA | . | 1.00 | . | . |
| R257 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | . | . | 1.00 |
| R258 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | . | . | 1.00 |
| R259 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . |
| R260 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . | 1.00 | . |
| R261 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 | . | . |
| R262 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | . | 1.00 |
| R263 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | . | . | 1.00 |
| R264 | 139-06191-0000 | | RES CH 6.19KEW 1% | EA | . | . | . | 1.00 |
| R265 | 139-03921-0000 | | RES CH 3.92K EW 1% | EA | . | . | . | 1.00 |
| R266 | 139-01821-0000 | | RES CHIP 1.82KEW1% | EA | . | . | . | 1.00 |
| R267 | 133-00351-0003 | | POTENTIOMETER 4.7K | EA | . | . | . | 1.00 |
| R268 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R269 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | . | . | 1.00 |
| R270 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R271 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| R272 | 132-05051-0000 | | RES WW .15 2W 5% | EA | . | 1.00 | . | . |
| R273 | 132-05051-0000 | | RES WW .15 2W 5% | EA | . | 1.00 | . | . |
| R274 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R275 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | . | . | 1.00 |
| R276 | 139-03651-0000 | | RESCH 3.65K 8EW 1% | EA | . | . | . | 1.00 |
| R277 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R278 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | . | . | 1.00 |
| R279 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | 1.00 | 1.00 | . |
| R280 | 139-06810-0000 | | RES CH 681 EW 1% | EA | . | . | . | 1.00 |
| R281 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | . | . | 1.00 |
| R282 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R283 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | . | . | 1.00 |
| R284 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | . | . | 1.00 |
| R286 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | . | . | 1.00 |
| R287 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|-------|-------|
| R288 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R289 | 139-05620-0000 | | RES CH 562 EW 1% | EA | . | . | . | 1.00 |
| R290 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R291 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R292 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | . | . | 1.00 |
| R293 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R294 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | . | . | 1.00 |
| R295 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R296 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | . | . | 1.00 |
| R297 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | . | . | 1.00 |
| R298 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | . | . | 1.00 |
| R299 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | . | . | 1.00 |
| REF1 | 300-07799-0000 | | 14V MAIN BOARD KY | RF | .00 | . | .00 | . |
| REF1 | 300-07799-0001 | | 28V MAIN BOARD K | RF | . | .00 | . | . |
| REF2 | 002-07799-0000 | | KY96A/97A LCD MAIN | RF | . | . | . | .00 |
| T101 | 019-08079-0000 | | XFMR IF | EA | . | . | . | 1.00 |
| T102 | 019-08080-0000 | | XFMR IF 15PF | EA | . | . | . | 1.00 |
| T103 | 019-08102-0000 | | XFMR IF 27PF | EA | . | . | . | 1.00 |
| T104 | 019-08103-0000 | | XFMR IF | EA | . | . | . | 1.00 |
| T105 | 019-02328-0081 | | 3.5 TURN CT | EA | . | . | . | 1.00 |
| T106 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| T107 | 019-05083-0000 | | XFMR AUD | EA | . | . | . | 1.00 |
| T108 | 019-05084-0001 | | XFMR MOD 900T | EA | . | . | . | 1.00 |
| T109 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| T110 | 999-09999-0098 | | PLACE HOLDER | RF | . | . | . | .00 |
| TP101 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP102 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP104 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP105 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP106 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP107 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP108 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP109 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP110 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP112 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| TP115 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | . | . | 1.00 |
| Y101 | 044-00272-0001 | | 3.975 MHZ .001% | EA | . | . | . | 1.00 |
| | 009-07799-0000 | | PC BD MAIN | EA | . | . | . | 1.00 |
| | 012-01174-0000 | | INSULATOR | EA | . | . | . | 5.00 |
| | 016-01040-0000 | | COATING TYPE AR | AR | . | . | . | 1.00 |
| | 016-01082-0000 | | DC RTV 3145 | AR | . | . | . | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | . | . | 1.40 |
| | 026-00004-0000 | | WIRE, CU, 20AWG, T | IN | 1.25 | . | 1.25 | 6.40 |
| | 026-00013-0000 | | WIRE, COAX, RG-178 | IN | . | . | . | 4.75 |
| | 030-02174-0001 | | PIN CONT | EA | . | . | . | 2.00 |
| | 030-02174-0004 | | PIN CONTACT | EA | . | . | . | 9.00 |
| | 047-08202-0001 | | FENCE VCO | EA | . | . | . | 1.00 |
| | 047-08203-0001 | | FENCE PRESELECT/IF | EA | . | . | . | 1.00 |
| | 047-08208-0001 | | COVER VCO | EA | . | . | . | 1.00 |
| | 047-08209-0001 | | COVER PRESELECT/IF | EA | . | . | . | 1.00 |
| | 047-08476-0002 | | SHIELD VCO W/INS | EA | . | . | . | 1.00 |
| | 047-08477-0002 | | SHIELD PRESELW/INS | EA | . | . | . | 1.00 |
| | 047-08550-0002 | | GERMAN SHIELD | EA | . | . | . | 1.00 |
| | 089-06004-0003 | | SCR FHP 2-56X3/16 | EA | . | . | . | 3.00 |
| | 090-00213-0000 | | FUSE CLIP 1/4 IN. | EA | . | . | . | 2.00 |
| | 091-00025-0000 | | WSHR XSTR INSUL | EA | . | . | . | 1.00 |
| | 150-00003-0010 | | TUBING TFLN 24AWG | IN | . | . | . | 1.08 |
| | 150-00005-0010 | | TUBING TFLN 20AWG | IN | .75 | . | .75 | 6.40 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | . | . | 2.00 |
| | 155-02031-0027 | | JUMPER CABLE 9C | EA | . | . | . | 1.00 |
| | 155-02031-0030 | | JUMPER CABLE 9C | EA | . | . | . | 1.00 |
| | 200-07799-0099 | | COMMON BOM | EA | 1.00 | 1.00 | 1.00 | . |
| | 200-08506-0000 | | PC BOARD | EA | . | . | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0020 | -0021 | -0022 | -0099 |
|--------|----------------|---------|-------------|----|-------|-------|-------|-------|
| | 200-08506-0004 | | PC BOARD | EA | . | . | . | 1.00 |
| | 200-08939-0000 | | FILTER BD | EA | . | . | . | 1.00 |

200-07799-0023 96A MN BD 50K FUJI
 200-07799-0099 COMMON BOM

REV B
 REV CK

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| A101 | 200-08777-0010 | | SONY REPLACEMENT | EA | 1.00 | . |
| C101 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C102 | 106-05399-0020 | | CH 3.9PF NPO/100V | EA | . | 1.00 |
| C103 | 106-05479-0020 | | CH 4.7PF NPO/100V | EA | . | 1.00 |
| C104 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C105 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C107 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | 1.00 |
| C108 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C109 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C110 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C111 | 106-04682-0057 | | CAPCH6800PFX7R/100 | EA | . | 1.00 |
| C112 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C113 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C114 | 106-05689-0020 | | CH 6.8PF NPO/100V | EA | . | 1.00 |
| C115 | 106-05030-0020 | | CH 3.0PF NPO/100V | EA | . | 1.00 |
| C116 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C117 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C118 | 106-05060-0020 | | CH 6PF NPO 100V | EA | . | 1.00 |
| C119 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| C120 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C121 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C125 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C126 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C127 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C128 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C129 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C130 | 106-04392-0057 | | CAPCH3900PFX7R/100 | EA | . | 1.00 |
| C131 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C132 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | 1.00 |
| C133 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | 1.00 |
| C134 | 102-00085-0000 | | CAP VAR SURF MTG | EA | . | 1.00 |
| C135 | 097-00108-0020 | | CAP EL 0.47UF | EA | . | 1.00 |
| C136 | 106-05020-0020 | | CH 2PF NPO 100V | EA | . | 1.00 |
| C137 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C138 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | . | 1.00 |
| C139 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C140 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C144 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C145 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C146 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | 1.00 |
| C147 | 106-05020-0020 | | CH 2PF NPO 100V | EA | . | 1.00 |
| C148 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C149 | 106-04820-0026 | | CAP CH82PFNPO/100V | EA | . | 1.00 |
| C150 | 106-04330-0026 | | CH 33PF NPO/100V | EA | . | 1.00 |
| C151 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C152 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C153 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C154 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | 1.00 |
| C155 | 106-04470-0026 | | CAPCH 47PFNPO/100V | EA | . | 1.00 |
| C156 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C157 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C158 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C159 | 106-04151-0026 | | CH 150PF NPO/100V | EA | . | 1.00 |
| C160 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C161 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C162 | 106-04154-0078 | | CAP CH 150KZ5U/50V | EA | . | 1.00 |
| C163 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C164 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C165 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C166 | 096-01082-0057 | | CAP TN 1UF 35V | EA | . | 1.00 |
| C167 | 097-00149-0001 | | CAP AL 1000UF 50V | EA | 1.00 | . |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| C168 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C169 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C170 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C171 | 106-04473-0047 | | CAP CH 47K X7R/50V | EA | . | 1.00 |
| C172 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C173 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C174 | 111-00001-0068 | | CAP CR .068UF 50V | EA | . | 1.00 |
| C175 | 111-00001-0003 | | CAP CR .22UF 50V | EA | . | 1.00 |
| C176 | 111-00001-0003 | | CAP CR .22UF 50V | EA | . | 1.00 |
| C177 | 097-00108-0018 | | CAP EL 0.22UF | EA | . | 1.00 |
| C178 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C179 | 097-00108-0014 | | CAP EL 4.7UF 35V | EA | . | 1.00 |
| C180 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C181 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C182 | 097-00108-0023 | | CAP EL 3.3UF | EA | . | 1.00 |
| C183 | 097-00108-0020 | | CAP EL 0.47UF | EA | . | 1.00 |
| C184 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C185 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C186 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C187 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C188 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C189 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C190 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C191 | 097-00108-0022 | | CAP EL 2.2UF | EA | . | 1.00 |
| C192 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| C193 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C194 | 111-00001-0001 | | CAP CR .1UF 50V | EA | . | 1.00 |
| C195 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C196 | 097-00109-0006 | | CAP EL 100UF 16V | EA | . | 1.00 |
| C197 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C198 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C199 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C200 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C201 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C202 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C203 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C204 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C205 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C206 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C207 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C208 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C209 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C210 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C211 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C212 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C213 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C214 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C215 | 097-00108-0015 | | CAP EL 10UF 35V | EA | 1.00 | . |
| C216 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C217 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C218 | 106-04222-0057 | | CAPCH2200PFX7R/100 | EA | . | 1.00 |
| C219 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C220 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C221 | 097-00108-0021 | | CAP EL 1.0UF 50V | EA | . | 1.00 |
| C222 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C223 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| C224 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C225 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C226 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | 1.00 |
| C227 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C228 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C229 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C230 | 111-00001-0006 | | CAP CR .47UF 50V | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| C231 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | 1.00 |
| C232 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C233 | 106-04101-0026 | | CH 100PF NPO/100V | EA | . | 1.00 |
| C236 | 111-00001-0026 | | CAP CR .33UF 50V | EA | . | 1.00 |
| C237 | 096-01082-0040 | | CAP TN 3.3UF 35V | EA | . | 1.00 |
| C238 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C239 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C240 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| C241 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C242 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C243 | 106-04471-0026 | | CH 470PF NPO/100V | EA | . | 1.00 |
| C244 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C245 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C246 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C247 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C248 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C249 | 106-04390-0026 | | CH 39PF NPO/100V | EA | . | 1.00 |
| C250 | 097-00108-0023 | | CAP EL 3.3UF | EA | . | 1.00 |
| C251 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C252 | 106-04391-0026 | | CH 390PF NPO/100V | EA | . | 1.00 |
| C253 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C254 | 106-04270-0026 | | CH 27PF NPO/100V | EA | 1.00 | . |
| C255 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C256 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C257 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C258 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C259 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C260 | 106-04103-0057 | | CAP CH 10KX7R/100V | EA | . | 1.00 |
| C261 | 106-04821-0016 | | CAP CH820PFNPO/50V | EA | . | 1.00 |
| C262 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C263 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C264 | 106-04821-0016 | | CAP CH820PFNPO/50V | EA | . | 1.00 |
| C265 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C267 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C268 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C269 | 097-00108-0007 | | CAP EL 10UF 16V | EA | . | 1.00 |
| C270 | 097-00104-0036 | | CAP AL 47UF 25V | EA | . | 1.00 |
| C271 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | . | 1.00 |
| C272 | 106-04220-0026 | | CH 22PF NPO/100V | EA | . | 1.00 |
| C273 | 106-04829-0020 | | CAP CH 8.2 NPO/100 | EA | . | 1.00 |
| C274 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C281 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C282 | 106-04104-0047 | | CH 100KX7R/50V | EA | . | 1.00 |
| C284 | 106-04102-0026 | | CH 1KPF NPO/100V | EA | . | 1.00 |
| C285 | 096-01082-0002 | | CAP TN 1UF 35V | EA | . | 1.00 |
| C286 | 106-04221-0026 | | CAP CH220PFNPO/100 | EA | . | 1.00 |
| C287 | 106-04331-0026 | | CAPCH330PFNPO/100V | EA | . | 1.00 |
| C288 | 106-04121-0026 | | CAPCH120PFNPO/100V | EA | 1.00 | . |
| CR101 | 007-04020-0005 | | MS5 VARACTOR DIODE | EA | . | 1.00 |
| CR102 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | 1.00 |
| CR104 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | 1.00 |
| CR105 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR106 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR107 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR108 | 007-05039-0002 | | DIO Z 40.2V | EA | . | 1.00 |
| CR109 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR110 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR111 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| CR112 | 007-06223-0000 | | DIO DUAL SWITCHING | EA | . | 1.00 |
| CR113 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR114 | 007-06181-0000 | | DIO DUAL MMBD2835 | EA | . | 1.00 |
| CR115 | 007-05117-0017 | | DIO Z 16V SOT | EA | 1.00 | . |
| CR116 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| CR117 | 007-06228-0000 | | RF SWITCHING DIODE | EA | . | 1.00 |
| CR118 | 007-05117-0023 | | DIO Z 30V SOT | EA | . | 1.00 |
| CR119 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| CR120 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| CR121 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| CR122 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | . | 1.00 |
| CR123 | 007-05117-0007 | | DIO Z 6.2V SOT | EA | 1.00 | . |
| CR124 | 007-06105-0000 | | DIO HV FDH444 | EA | . | 1.00 |
| CR125 | 007-06222-0000 | | DIO DAN202K | EA | . | 1.00 |
| F101 | 036-00014-0000 | | FUSE 3AG 250V 10A | EA | . | 1.00 |
| FL101 | 017-00076-0000 | | FLTR XTAL 11.4MHZ | EA | 1.00 | . |
| I101 | 120-03020-0001 | | IC IF AMP S0 | EA | . | 1.00 |
| I102 | 120-03020-0001 | | IC IF AMP S0 | EA | . | 1.00 |
| I104 | 120-03094-0032 | | IC LM340LAZ-5.0 | EA | . | 1.00 |
| I105 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | 1.00 |
| I106 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | 1.00 |
| I107 | 120-03127-0011 | | IC LM2903 S0 PKG | EA | . | 1.00 |
| I108 | 120-03026-0000 | | IC MC7805CT | EA | . | 1.00 |
| I109 | 120-03094-0032 | | IC LM340LAZ-5.0 | EA | . | 1.00 |
| I110 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| I111 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | 1.00 |
| I112 | 120-03190-0000 | | AUDIO AMP LM1877N- | EA | . | 1.00 |
| I113 | 120-03053-0009 | | LM358D DUAL OP AMP | EA | . | 1.00 |
| L101 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | 1.00 |
| L102 | 019-02084-0024 | | CH 1.5UH 5% | EA | . | 1.00 |
| L103 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | 1.00 |
| L104 | 019-02084-0027 | | CH 1.8UH 10% | EA | . | 1.00 |
| L105 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | 1.00 |
| L106 | 019-02084-0034 | | CH 3.9UH 5% | EA | . | 1.00 |
| L107 | 019-02312-0060 | | IDCTR V 2.5T | EA | . | 1.00 |
| L108 | 019-02084-0021 | | CH 1UH 10% | EA | . | 1.00 |
| L109 | 019-02209-0000 | | CHOKE FILTER | EA | . | 1.00 |
| L110 | 019-08078-0000 | | COIL TUN 20MH | EA | . | 1.00 |
| L111 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L112 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L113 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L114 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . |
| L115 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L116 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L117 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L118 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . |
| L119 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| L120 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L121 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L122 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L123 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L124 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L126 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | 1.00 | . |
| L129 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| L130 | 013-00028-0001 | | FERR BEAD W/LEAD | EA | . | 1.00 |
| L132 | 019-02084-0027 | | CH 1.8UH 10% | EA | . | 1.00 |
| L133 | 019-02084-0021 | | CH 1UH 10% | EA | . | 1.00 |
| L134 | 019-02099-0003 | | CH .047UH 5% | EA | . | 1.00 |
| L135 | 019-02084-0000 | | CH .15UH 5% | EA | . | 1.00 |
| L136 | 019-02084-0005 | | CH .22UH 10% | EA | . | 1.00 |
| L137 | 019-02084-0009 | | CH .33UH 10% | EA | . | 1.00 |
| Q101 | 007-00254-0001 | | XSTR S PNP SOT-23 | EA | . | 1.00 |
| Q102 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| Q103 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| Q104 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q105 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q106 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q107 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| Q108 | 007-00579-0000 | | XSTR 2SK241 | EA | . | 1.00 |
| Q109 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q110 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q111 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q112 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q114 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | 1.00 |
| Q115 | 007-00467-0000 | | XSTR S NPN MMBTA06 | EA | . | 1.00 |
| Q116 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | . | 1.00 |
| Q117 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q118 | 007-00280-0001 | | XSTR E175/J175 | EA | . | 1.00 |
| Q119 | 007-00280-0001 | | XSTR E175/J175 | EA | . | 1.00 |
| Q120 | 007-00280-0001 | | XSTR E175/J175 | EA | . | 1.00 |
| Q121 | 007-00813-0000 | | XSTR NPN S MMBTA14 | EA | . | 1.00 |
| Q123 | 007-00078-0001 | | XSTR S NPN 2N3417 | EA | . | 1.00 |
| Q126 | 007-00250-0000 | | XSTR 2N4427 | EA | . | 1.00 |
| Q127 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q128 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | 1.00 |
| Q129 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | 1.00 |
| Q131 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q132 | 007-00195-0001 | | XSTR MPSH10 | EA | . | 1.00 |
| Q133 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | 1.00 |
| Q134 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q135 | 007-00537-0000 | | XSTR PNP MMBT5087 | EA | . | 1.00 |
| Q136 | 007-00537-0000 | | XSTR PNP MMBT5087 | EA | . | 1.00 |
| Q137 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q138 | 007-00179-0001 | | XSTR SOT23 2N3904 | EA | . | 1.00 |
| Q139 | 007-00383-0004 | | SOT-23 2N2222A XST | EA | . | 1.00 |
| Q140 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| Q141 | 007-00187-0002 | | XSTR SOT-23 2N5089 | EA | . | 1.00 |
| R1001 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | 1.00 |
| R1002 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | 1.00 |
| R1003 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R1004 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R1005 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | 1.00 |
| R1006 | 139-00200-0000 | | RES CH 20.0 EW 1% | EA | . | 1.00 |
| R1007 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R1009 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | 1.00 |
| R101 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R1010 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R1011 | 139-02211-0000 | | RES CH 2.21K EW 1% | EA | . | 1.00 |
| R1012 | 139-08661-0000 | | RES CH 8.66K EW 1% | EA | . | 1.00 |
| R1013 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R1014 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R1015 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R1016 | 139-06811-0000 | | RES CH 6.81K EW 1% | EA | 1.00 | . |
| R1017 | 139-01211-0000 | | RES CHIP1.21KEW1% | EA | 1.00 | . |
| R1019 | 139-00750-0000 | | RES CH 75.0 EW 1% | EA | . | 1.00 |
| R102 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R1020 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R1021 | 130-05027-0033 | | RES CH 2.7 QW 5% | EA | . | 1.00 |
| R1022 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R1023 | 130-05027-0033 | | RES CH 2.7 QW 5% | EA | . | 1.00 |
| R1024 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R1025 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R103 | 139-01211-0000 | | RES CHIP1.21KEW1% | EA | . | 1.00 |
| R104 | 139-04750-0000 | | RES CH 475 EW 1% | EA | 1.00 | . |
| R105 | 139-02671-0000 | | RES CH 2.67K EW 1% | EA | . | 1.00 |
| R106 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R107 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R108 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R109 | 139-00475-0000 | | RES CH 47.5 EW 1% | EA | . | 1.00 |
| R110 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | 1.00 |
| R111 | 139-04322-0000 | | RES CHIP 43.2KEW1% | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| R112 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | 1.00 |
| R113 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | 1.00 |
| R114 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R115 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R116 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R117 | 139-05622-0000 | | RES CH 56.2K EW 1% | EA | . | 1.00 |
| R118 | 139-05112-0000 | | RES CHIP 51.1K 1% | EA | . | 1.00 |
| R119 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R120 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R121 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R122 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R123 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | 1.00 |
| R124 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | 1.00 |
| R125 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | 1.00 |
| R126 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R127 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R128 | 139-01101-0000 | | RES CH 1.1K EW 1% | EA | . | 1.00 |
| R129 | 139-09090-0000 | | RES CHIP 909 EW 1% | EA | . | 1.00 |
| R130 | 139-00562-0000 | | RES CH 56.2 EW 1% | EA | . | 1.00 |
| R131 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R132 | 139-02002-0000 | | RES CHIP 20.0KEW1% | EA | . | 1.00 |
| R133 | 139-03920-0000 | | 392 OHM 1/8W 1% | EA | . | 1.00 |
| R134 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | 1.00 |
| R135 | 139-01820-0000 | | RES CH 182 EW 1% | EA | . | 1.00 |
| R136 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R137 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | 1.00 |
| R138 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R139 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R140 | 139-03320-0000 | | RES CHIP 332 EW 1% | EA | . | 1.00 |
| R141 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | 1.00 |
| R142 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R143 | 139-08251-0000 | | RES CH 8.25K EW 1% | EA | . | 1.00 |
| R144 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R145 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | 1.00 |
| R146 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R147 | 139-03320-0000 | | RES CHIP 332 EW 1% | EA | . | 1.00 |
| R148 | 139-08251-0000 | | RES CH 8.25K EW 1% | EA | . | 1.00 |
| R149 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R150 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R151 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R152 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | 1.00 |
| R153 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | 1.00 |
| R154 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R155 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | 1.00 |
| R156 | 139-01212-0000 | | RES CHIP 12.1K1%EW | EA | . | 1.00 |
| R157 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R158 | 139-06812-0000 | | RES 68.1K EW 1% | EA | . | 1.00 |
| R159 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R160 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R161 | 139-03921-0000 | | RES CH 3.92K EW 1% | EA | . | 1.00 |
| R162 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R163 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R164 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R165 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R166 | 139-01003-0000 | | RES CHIP 100KEW1% | EA | . | 1.00 |
| R167 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R168 | 139-01103-0000 | | RES CHIP 110K EW1% | EA | . | 1.00 |
| R169 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R170 | 139-01102-0000 | | RES 11K EW 1% | EA | . | 1.00 |
| R171 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | . | 1.00 |
| R172 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R173 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R174 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| R175 | 139-03652-0000 | | RES CHIP 36.5KEW1% | EA | . | 1.00 |
| R176 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | 1.00 |
| R177 | 139-02742-0000 | | RES CHIP 27.4KEW1% | EA | . | 1.00 |
| R178 | 139-05111-0000 | | RES CHIP 5.11KEW1% | EA | . | 1.00 |
| R179 | 139-05111-0000 | | RES CHIP 5.11KEW1% | EA | . | 1.00 |
| R180 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R181 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R182 | 139-07500-0000 | | RES CHIP 750 EW 1% | EA | . | 1.00 |
| R183 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | 1.00 |
| R184 | 133-00351-0005 | | POTENTIOMETER 22K | EA | . | 1.00 |
| R185 | 139-03322-0000 | | RES CH 33.2K EW 1% | EA | . | 1.00 |
| R186 | 139-02002-0000 | | RES CHIP 20.0KEW1% | EA | . | 1.00 |
| R187 | 139-01242-0000 | | RES CHIP 12.4KEW1% | EA | . | 1.00 |
| R188 | 139-01822-0000 | | RES CHIP 18.2KEW1% | EA | . | 1.00 |
| R189 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | 1.00 |
| R190 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R191 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R192 | 139-05620-0000 | | RES CH 562 EW 1% | EA | . | 1.00 |
| R193 | 131-00012-0033 | | RES CF 1.2 HW 5% | EA | . | 1.00 |
| R194 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R195 | 139-05110-0000 | | RES CH 511 EW 1% | EA | . | 1.00 |
| R196 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R197 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R198 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | 1.00 |
| R199 | 139-06193-0000 | | RES CH 619KEW 1% | EA | . | 1.00 |
| R200 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R201 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | 1.00 |
| R202 | 139-02743-0000 | | RES CH 274K EW 1% | EA | . | 1.00 |
| R204 | 139-02431-0000 | | RES CH 2.43K EW 1% | EA | . | 1.00 |
| R205 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R206 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R207 | 139-09091-0000 | | RES CH 9.09K EW 1% | EA | . | 1.00 |
| R208 | 139-01332-0000 | | RES CHIP 13.3KEW1% | EA | . | 1.00 |
| R209 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R210 | 139-02741-0000 | | RES CH 2.74K EW 1% | EA | . | 1.00 |
| R211 | 139-02003-0000 | | RES CHIP 200KEW1% | EA | . | 1.00 |
| R212 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R213 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R214 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R215 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R216 | 139-01102-0000 | | RES 11K EW 1% | EA | . | 1.00 |
| R217 | 139-03010-0000 | | RES CHIP 301 EW 1% | EA | . | 1.00 |
| R218 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R219 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R220 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R221 | 133-00351-0004 | | POTENTIOMETER 10K | EA | . | 1.00 |
| R222 | 139-01501-0000 | | RES CH 1.5K EW 1% | EA | . | 1.00 |
| R223 | 139-03922-0000 | | RES CH 39.2K EW 1% | EA | . | 1.00 |
| R224 | 130-05101-0033 | | RES CH 100 QW 5% | EA | . | 1.00 |
| R225 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | 1.00 |
| R226 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R227 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R228 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R229 | 139-00150-0000 | | RES CH 15 EW 1% | EA | . | 1.00 |
| R230 | 139-04751-0000 | | RES CH 4.75K EW 1% | EA | . | 1.00 |
| R231 | 139-01004-0000 | | RES CHIP 1M EW 1% | EA | . | 1.00 |
| R232 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R233 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | 1.00 |
| R234 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | 1.00 |
| R235 | 139-03011-0000 | | RES CH 3.01K EW 1% | EA | . | 1.00 |
| R236 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R237 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R238 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| R239 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | . | 1.00 |
| R240 | 139-00221-0000 | | RES CH 22.1 EW 1% | EA | . | 1.00 |
| R241 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R242 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R243 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R244 | 139-02432-0000 | | RES CH 24.3K EW 1% | EA | . | 1.00 |
| R245 | 139-05621-0000 | | RES CHIP 5.62KEW1% | EA | . | 1.00 |
| R246 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R247 | 139-02000-0000 | | RES CH 200 EW 1% | EA | . | 1.00 |
| R248 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . |
| R250 | 139-02212-0000 | | RES CHIP 22.1KEW1% | EA | 1.00 | . |
| R251 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | 1.00 | . |
| R252 | 131-00162-0033 | | RES CF 1.6K HW 5% | EA | 1.00 | . |
| R253 | 139-01500-0000 | | RES CH 150 EW 1% | EA | . | 1.00 |
| R254 | 139-06191-0000 | | RES CH 6.19KEW 1% | EA | . | 1.00 |
| R255 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R256 | 133-00351-0005 | | POTENTIOMETER 22K | EA | 1.00 | . |
| R257 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | 1.00 |
| R258 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | 1.00 |
| R261 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . |
| R262 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | 1.00 |
| R263 | 139-00100-0000 | | RES CHIP 10 EW 1% | EA | . | 1.00 |
| R264 | 139-06191-0000 | | RES CH 6.19KEW 1% | EA | . | 1.00 |
| R265 | 139-03921-0000 | | RES CH 3.92K EW 1% | EA | . | 1.00 |
| R266 | 139-01821-0000 | | RES CHIP 1.82KEW1% | EA | . | 1.00 |
| R267 | 133-00351-0003 | | POTENTIOMETER 4.7K | EA | . | 1.00 |
| R268 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R269 | 139-02001-0000 | | RES CHIP 2K EW 1% | EA | . | 1.00 |
| R270 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R271 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| R272 | 132-05051-0000 | | RES WW .15 2W 5% | EA | 1.00 | . |
| R273 | 132-05051-0000 | | RES WW .15 2W 5% | EA | 1.00 | . |
| R274 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R275 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | 1.00 |
| R276 | 139-03651-0000 | | RESCH 3.65K 8EW 1% | EA | . | 1.00 |
| R277 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R278 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | 1.00 |
| R279 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | 1.00 | . |
| R280 | 139-06810-0000 | | RES CH 681 EW 1% | EA | . | 1.00 |
| R281 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | 1.00 |
| R282 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R283 | 139-01002-0000 | | RES CHIP 10K EW 1% | EA | . | 1.00 |
| R284 | 139-03321-0000 | | RES CHIP 3.32K EW | EA | . | 1.00 |
| R286 | 139-04753-0000 | | RES CH 475K EW 1% | EA | . | 1.00 |
| R287 | 139-01502-0000 | | RES CHIP 15K EW 1% | EA | . | 1.00 |
| R288 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R289 | 139-05620-0000 | | RES CH 562 EW 1% | EA | . | 1.00 |
| R290 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R291 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R292 | 139-01000-0000 | | RES CHIP 100 EW 1% | EA | . | 1.00 |
| R293 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R294 | 139-04752-0000 | | RES CH 47.5K EW 1% | EA | . | 1.00 |
| R295 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R296 | 130-05000-0025 | | RES CHIP 0 EW CJ | EA | . | 1.00 |
| R297 | 139-01001-0000 | | RES CHIP 1K EW 1% | EA | . | 1.00 |
| R298 | 139-04750-0000 | | RES CH 475 EW 1% | EA | . | 1.00 |
| R299 | 139-02210-0000 | | RES CH 221 EW 1% | EA | . | 1.00 |
| REF1 | 300-07799-0001 | | 28V MAIN BOARD K | RF | .00 | . |
| REF2 | 002-07799-0000 | | KY96A/97A LCD MAIN | RF | . | .00 |
| T101 | 019-08079-0000 | | XFMR IF | EA | . | 1.00 |
| T102 | 019-08080-0000 | | XFMR IF 15PF | EA | . | 1.00 |
| T103 | 019-08102-0000 | | XFMR IF 27PF | EA | . | 1.00 |
| T104 | 019-08103-0000 | | XFMR IF | EA | . | 1.00 |

| SYMBOL | PART NUMBER | FIND NO | DESCRIPTION | UM | -0023 | -0099 |
|--------|----------------|---------|--------------------|----|-------|-------|
| T105 | 019-02328-0081 | | 3.5 TURN CT | EA | . | 1.00 |
| T106 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| T107 | 019-05083-0000 | | XFMR AUD | EA | . | 1.00 |
| T108 | 019-05084-0001 | | XFMR MOD 900T | EA | . | 1.00 |
| T109 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| T110 | 999-09999-0098 | | PLACE HOLDER | RF | . | .00 |
| TP101 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP102 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP104 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP105 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP106 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP107 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP108 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP109 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP110 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP112 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| TP115 | 008-00096-0001 | | TERMINAL TEST PNT | EA | . | 1.00 |
| Y101 | 044-00272-0001 | | 3.975 MHZ .001% | EA | . | 1.00 |
| | 009-07799-0000 | | PC BD MAIN | EA | . | 1.00 |
| | 012-01174-0000 | | INSULATOR | EA | . | 5.00 |
| | 016-01040-0000 | | COATING TYPE AR | AR | . | 1.00 |
| | 016-01082-0000 | | DC RTV 3145 | AR | . | 1.00 |
| | 025-00005-0002 | | WIRE 18 RED | IN | . | 1.40 |
| | 026-00004-0000 | | WIRE, CU, 20AWG, T | IN | . | 6.40 |
| | 026-00013-0000 | | WIRE, COAX, RG-178 | IN | . | 4.75 |
| | 030-02174-0001 | | PIN CONT | EA | . | 2.00 |
| | 030-02174-0004 | | PIN CONTACT | EA | . | 9.00 |
| | 047-08202-0001 | | FENCE VCO | EA | . | 1.00 |
| | 047-08203-0001 | | FENCE PRESELECT/IF | EA | . | 1.00 |
| | 047-08208-0001 | | COVER VCO | EA | . | 1.00 |
| | 047-08209-0001 | | COVER PRESELECT/IF | EA | . | 1.00 |
| | 047-08476-0002 | | SHIELD VCO W/INS | EA | . | 1.00 |
| | 047-08477-0002 | | SHIELD PRESELW/INS | EA | . | 1.00 |
| | 047-08550-0002 | | GERMAN SHIELD | EA | . | 1.00 |
| | 089-06004-0003 | | SCR FHP 2-56X3/16 | EA | . | 3.00 |
| | 090-00213-0000 | | FUSE CLIP 1/4 IN. | EA | . | 2.00 |
| | 091-00025-0000 | | WSHR XSTR INSUL | EA | . | 1.00 |
| | 150-00003-0010 | | TUBING TFLN 24AWG | IN | . | 1.08 |
| | 150-00005-0010 | | TUBING TFLN 20AWG | IN | . | 6.40 |
| | 150-00103-0000 | | SLDR SLEEVE | EA | . | 2.00 |
| | 155-02031-0027 | | JUMPER CABLE 9C | EA | . | 1.00 |
| | 155-02031-0030 | | JUMPER CABLE 9C | EA | . | 1.00 |
| | 200-07799-0099 | | COMMON BOM | EA | 1.00 | . |
| | 200-08506-0000 | | PC BOARD | EA | . | 1.00 |
| | 200-08506-0004 | | PC BOARD | EA | . | 1.00 |
| | 200-08939-0000 | | FILTER BD | EA | . | 1.00 |

THIS PAGE RESERVED




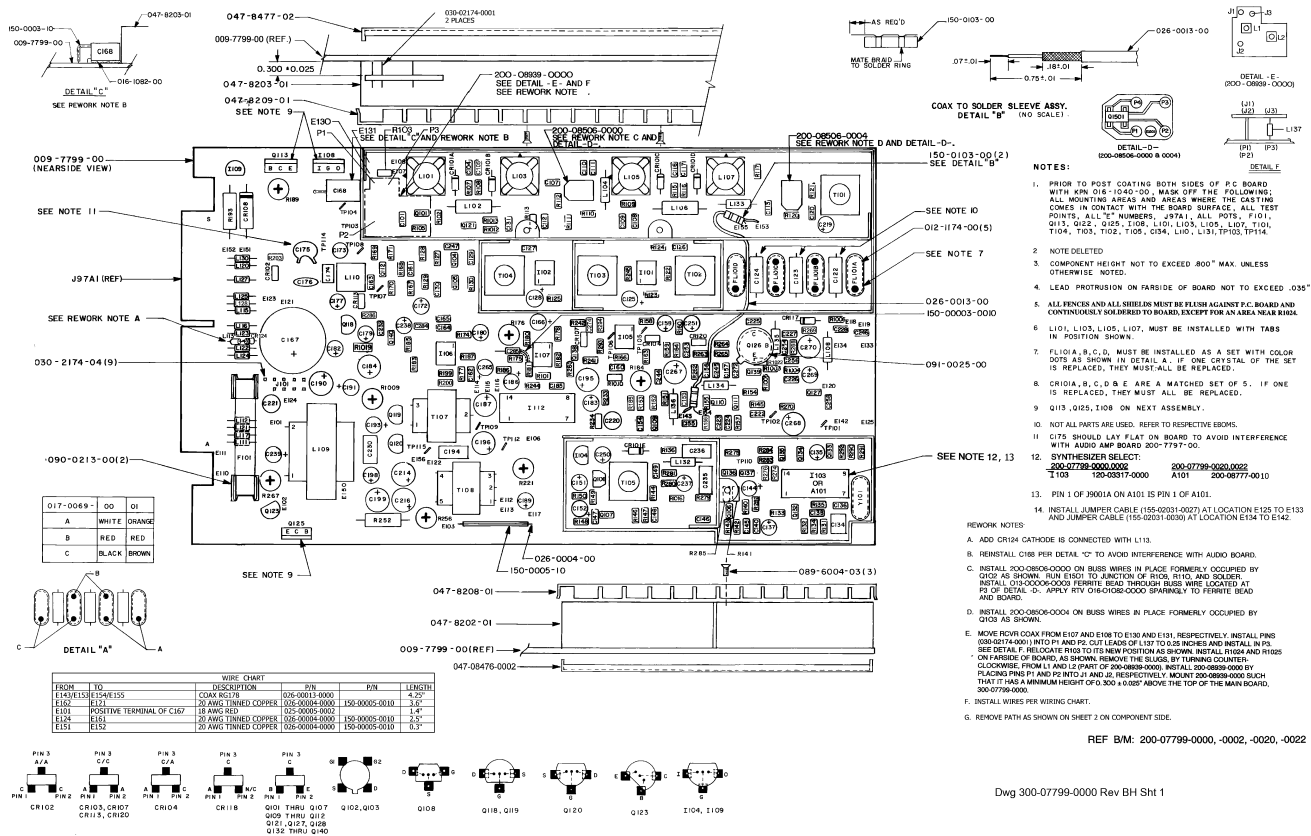


FIGURE 6-15 KY 97A (14V) Main Board Assembly (Sht 1 of 2)
(Dwg No 300-07799-0000, Rev BH, Sht 1)

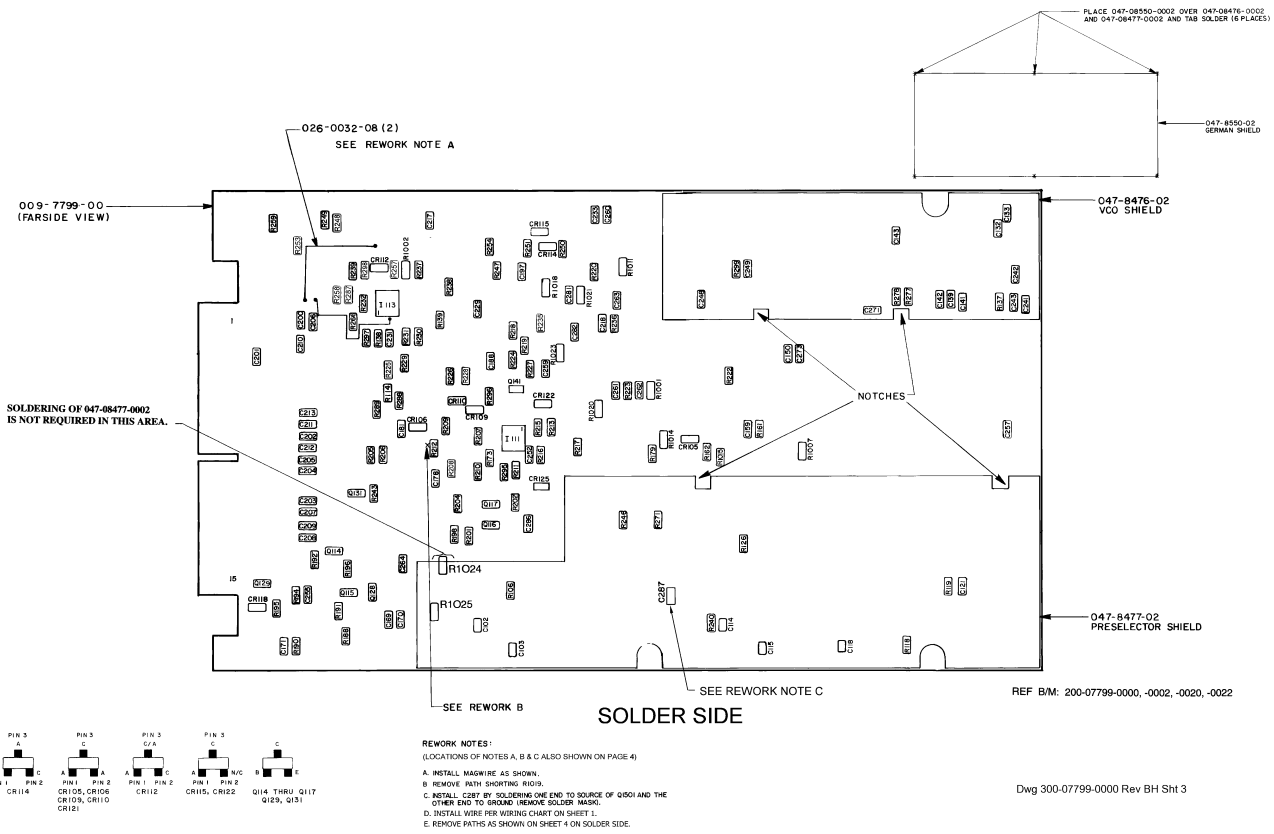

REWORK NOTES:
 (LOCATIONS OF NOTES A, B & C ALSO SHOWN ON PAGE 4)
 A. INSTALL MAGWIRE AS SHOWN.
 B. REMOVE WITH SHORTING RIDGES.
 C. INSTALL C8B7 BY SOLDERING ONE END TO SOURCE OF Q101 AND THE OTHER END TO GROUND (REMOVE SOLDER MASK).
 D. INSTALL WIRE PER WIRING CHART ON SHEET 1.
 E. REMOVE PATHS AS SHOWN ON SHEET 4 ON SOLDER SIDE.

FIGURE 6-15 KY 97A (14V) Main Board Assembly (Sht 2 of 2)
 (Dwg No 300-07799-0000, Rev BH, Sht 3)


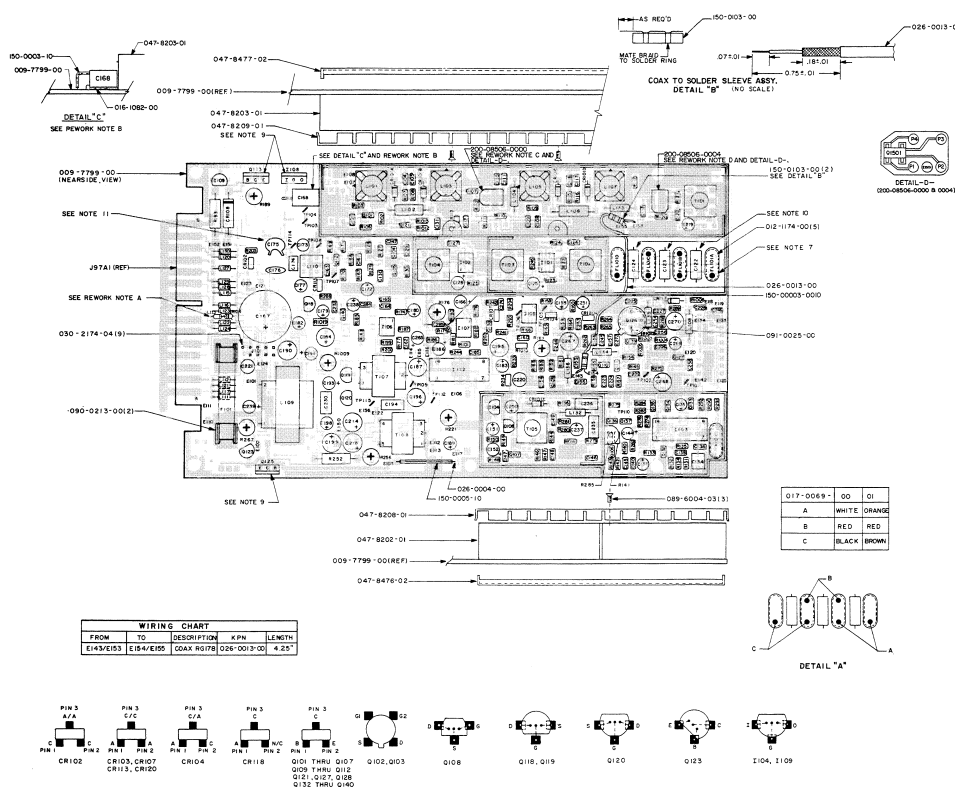


- NOTES:**
- PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH EN G18-0042-00, MARK OFF THE FOLLOWING: ALL MOUNTING AREAS AND AREAS WHERE THE CASTING COMES IN CONTACT WITH THE BOARD SURFACE. ALL TEST POINTS. ALL "E" NUMBERS: J7A1, ALL POS. F10-013, G12, G23, J10R, L10I, L10S, L10E, L07, T10I, T104, T03, T102, T109, G34, L10I, L13I.
 -
 - COMPONENT HEIGHT NOT TO EXCEED .800" MAX UNLESS OTHERWISE NOTED.
 - LEAD PROTRUSION ON PARSIE OF BOARD NOT TO EXCEED .035".
 - ALL FENCES AND ALL SHIELDS MUST BE FLUSH AGAINST P.C. BOARD AND CONTINUOUSLY SOLDERED TO BOARD.
 - L10I, L10S, L107, MUST BE INSTALLED WITH TABS IN POSITION SHOWN.
 - F10I A, B, C, D, MUST BE INSTALLED AS A SET WITH COLOR CODES AS SHOWN IN DETAIL A. IF ONE CRISTAL OF THE SET IS REPLACED, THEY MUST ALL BE REPLACED.
 - CRISTAL A, B, C, D, E ARE A MATCHED SET OF 5. IF ONE IS REPLACED, THEY MUST ALL BE REPLACED.
 - G113, G125, I108 ON NEXT ASSEMBLY.
 - G122, G123, G124 NOT ON 200-7799-02.
 - G175 SHOULD LAY FLAT ON BOARD TO AVOID INTERFERENCE WITH AUDIO AMP BOARD 200-7797-00.

- REWORK NOTES:**
- ADD CR124 CATHODE IS CONNECTED WITH L113.
 - REINSTALL C128 PER DETAIL C TO AVOID INTERFERENCE WITH AUDIO BOARD.
 - INSTALL 200-0806-0000 ON BUSS WIRES IN PLACE FORMALLY OCCUPIED BY C128. DO NOT TRY TO JOIN TOP OF BUSH WITH SOLDER. INSTALL 020-0006-0000 FERRITE BEAD THROUGH BUSS WIRE LOCATED AT PER DETAIL C. APPLY RTV OR GLO-BOND SPACERS TO FERRITE BEAD W/ BUSH.
 - INSTALL 200-0806-0004 ON BUSS WIRES IN PLACE FORMALLY OCCUPIED BY C128 AS SHOWN.


Dwg 300-07799-0000 Rev 18

FIGURE 6-15A KY 97A (14V) Main Board Assembly (Sht 1 of 2) (Dwg No 300-07799-0000, Rev 18)

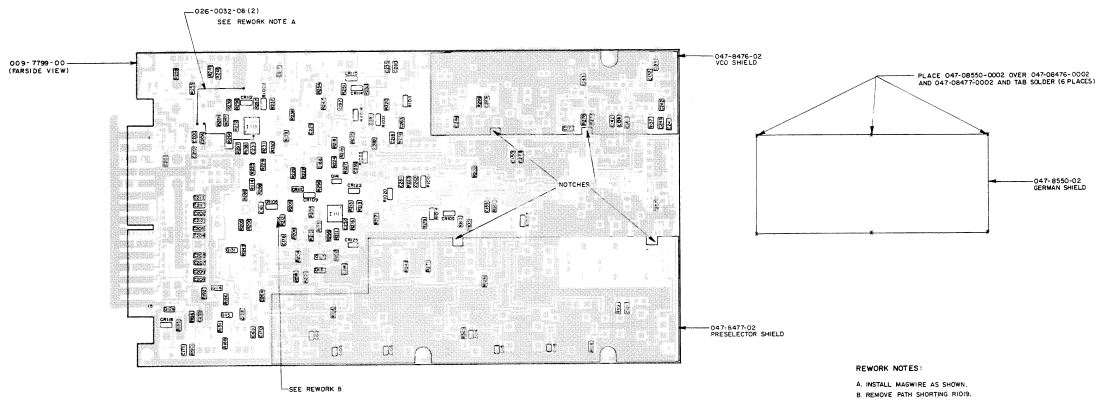

Dwg 300-07799-0000 Rev 18

FIGURE 6-15A KY 97A (14V) Main Board Assembly (Sht 2 of 2)
(Dwg No 300-07799-0000, Rev 18)

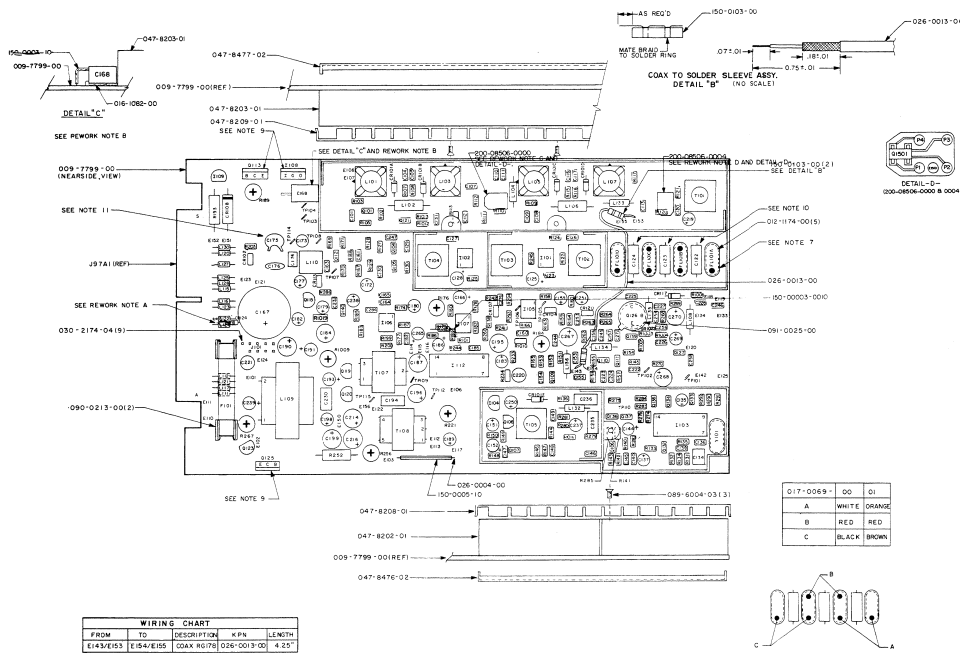

- NOTES:
1. PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH MIN. D15-1040-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS AND AREAS WHERE THE CASTING COMES IN CONTACT WITH THE BOARD SURFACE. ALL TEST POINTS, ALL "T" NUMBERS; J97A1; ALL POTS; F101, Q113, Q124, Q125, Q128, L101, L102, L103, L104, T101, T104, T103, T102, T105, Q134; L110, L131.
 - 2.
 3. COMPONENT HEIGHT NOT TO EXCEED .800" MAX UNLESS OTHERWISE NOTED.
 4. LEAD PROTRUSION ON FAR SIDE OF BOARD NOT TO EXCEED .035".
 5. ALL FENCES AND ALL SHIELDS MUST BE FLUSH AGAINST P.C. BOARD AND CONTINUOUSLY SOLDERED TO BOARD.
 6. L110, L103, L105, L107, MUST BE INSTALLED WITH TABS IN POSITION SHOWN.
 7. FLUIDIA, B, C, D, MUST BE INSTALLED AS A SET WITH COLOR DOTS AS SHOWN IN DETAIL A. IF ONE CRYSTAL OF THE SET IS REPLACED, THEY MUST ALL BE REPLACED.
 8. CR101A, B, C, D, E ARE A MATCHED SET OF 5. IF ONE IS REPLACED, THEY MUST ALL BE REPLACED.
 9. Q113, Q125, Q128 ON NEXT ASSEMBLY.
 10. C122, C123, C124 NOT ON 200-7799-02.
 11. C175 SHOULD LAY FLAT ON BOARD TO AVOID INTERFERENCE WITH AUDIO AMP BOARD 200-7797-00.

REWORK NOTES

- A. 400 CR124 CATHODE IS CONNECTED WITH L113.
- B. REINSTALL C168 PER DETAIL C TO AVOID INTERFERENCE WITH AUDIO BOARD.
- C. INSTALL 200-0806-0004 ON BUSS WIRES IN PLACE FORMALLY OCCUPIED BY 200-0806-0004 FROM L101 TO POSITION OF BUSS WIRE LOCATED AT P3 OF DETAIL-D.
- D. INSTALL 200-0806-0004 ON BUSS WIRES IN PLACE FORMALLY OCCUPIED BY 200-0806-0004.

| WIRING CHART | | | | |
|--------------|-----------|-------------|-------------|--------|
| FROM | TO | DESCRIPTION | WPN | LENGTH |
| E143/E153 | E164/E165 | COAX W/759 | 026-0013-00 | 4.22" |

| Q17-059-1 | DO | DI |
|-----------|-------|--------|
| A | WHITE | ORANGE |
| B | RED | RED |
| C | BLACK | BROWN |






FIGURE 6-15B KY 97A (14V) Main Board Assembly (Sht 1 of 2) (Dwg No 300-07799-0000, Rev 17)

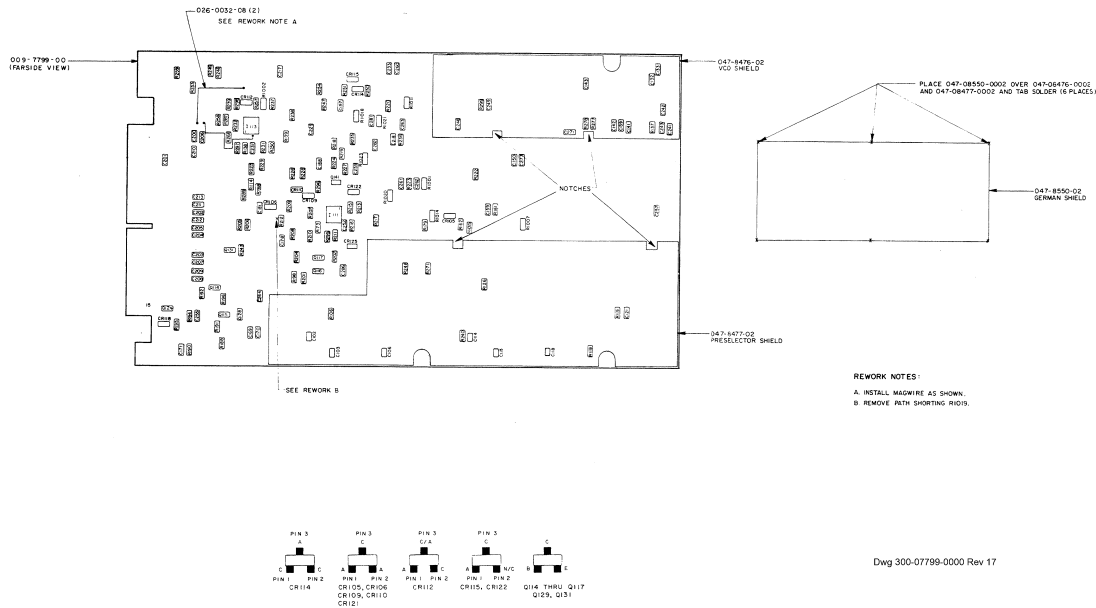

Dwg 300-07799-0000 Rev 17


FIGURE 6-15B KY 97A (14V) Main Board Assembly (Sht 2 of 2)
(Dwg No 300-07799-0000, Rev 17)

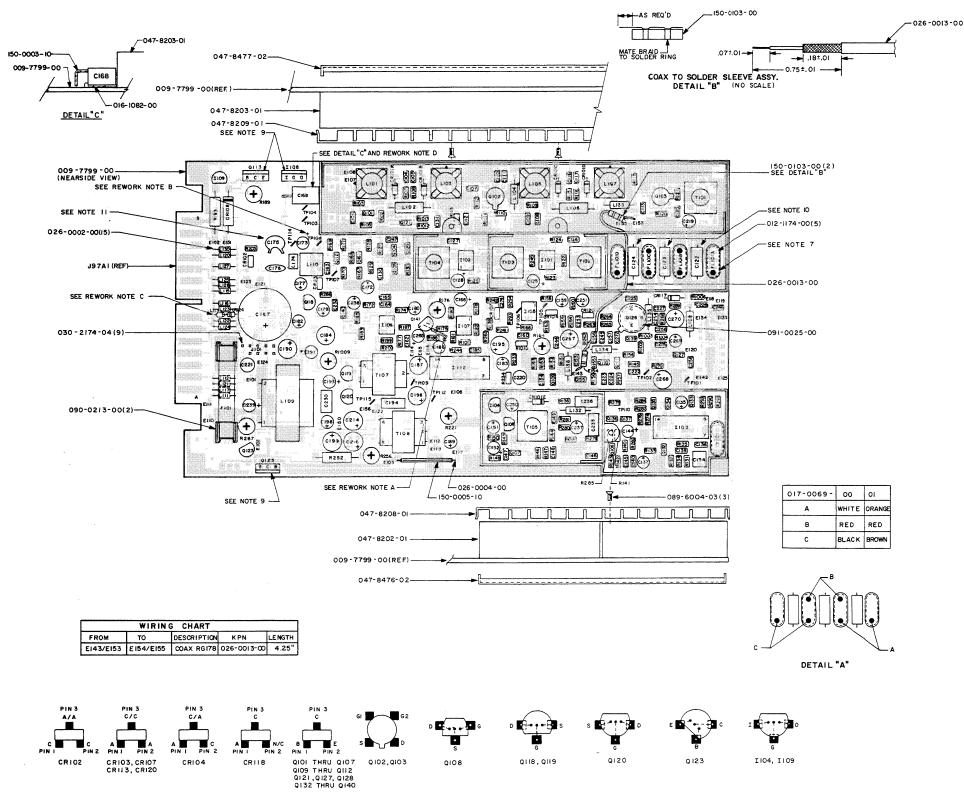

- NOTES:**
- PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH KEN 018-1040-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS AND AREAS WHERE THE CASTING COMES IN CONTACT WITH THE BOARD SURFACE. ALL TEST POINTS; ALL "T" NUMBERS; J97A1; ALL POTS; F101, Q113, Q122, Q123, Q124, L101, L103, L104, L107, T104, T104, T103, T102, T105, Q34, L10, L131.
 -
 - COMPONENT HEIGHT NOT TO EXCEED .800" MAX. UNLESS OTHERWISE NOTED.
 - LEAD PROTRUSION ON FARSIDE OF BOARD NOT TO EXCEED .035".
 - ALL FENCES AND ALL SHIELDS MUST BE FLUSH AGAINST P.C. BOARD AND CONTINUOUSLY SOLDERED TO BOARD.
 - L101, L103, L105, L107, MUST BE INSTALLED WITH TABS IN POSITION SHOWN.
 - F101A, B, C, D, MUST BE INSTALLED AS A SET WITH COLOR CODES AS SHOWN IN DETAIL A. IF ONE CRYSTAL OF THE SET IS REPLACED, THEY MUST ALL BE REPLACED.
 - CR101A, B, C, D, E ARE A MATCHED SET OF 5. IF ONE IS REPLACED, THEY MUST ALL BE REPLACED.
 - Q113, Q123, Q124 NOT ON 200-7799-02.
 - Q122, Q123, Q124 NOT ON 200-7799-02.
 - C175 SHOULD LAY FLAT ON BOARD TO AVOID INTERFERENCE WITH AUDIO AMP BOARD 200-7797-00.

- REWORK NOTES:**
- ADD SLEEVE 090-0010-00 AT THE # SYMBOL FOR C166. WRAP THE BASE LEAD OF Q141 AROUND THE LEAD OF Q140 THAT COMES THROUGH FROM THE FARSIDE. ENCLOSE THE BASE LEAD OF Q141 WITH 90-0000-00.
 - REMOVE THE # SYMBOL FOR C175 AND REINSTALL C173.
 - ADD CR124 CATHODE IS CONNECTED WITH L113.
 - REINSTALL C166 PER DETAIL C TO AVOID INTERFERENCE WITH AUDIO BOARD.

FIGURE 6-15C KY 97A (14V) Main Board Assembly (Sht 1 of 2)
(Dwg No 300-07799-0000, Rev 7)

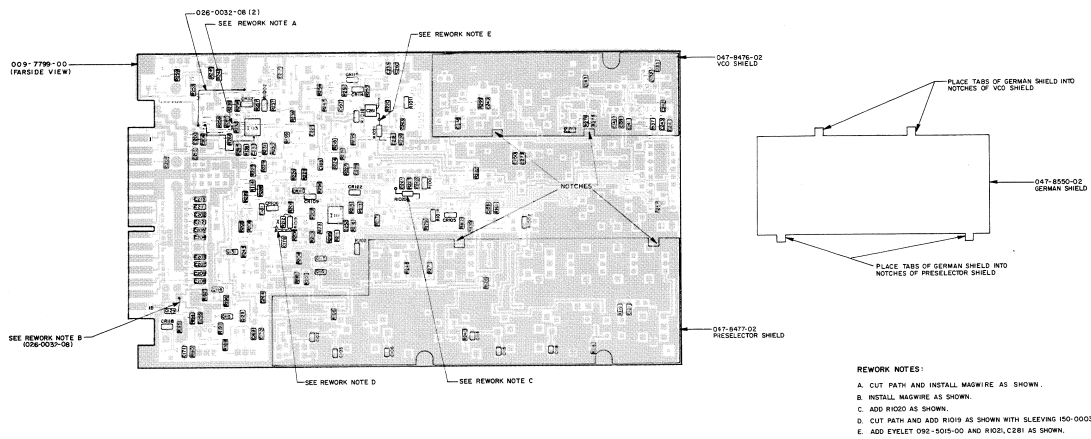

- REWORK NOTES:
- A. CUT PATH AND INSTALL MAGWIRE AS SHOWN.
 - B. INSTALL MAGWIRE AS SHOWN.
 - C. ADD R1020 AS SHOWN.
 - D. CUT PATH AND ADD R1019 AS SHOWN WITH SLEEVING 150-0003-10.
 - E. ADD EYELET 090-1019-00 AND R1020, C281 AS SHOWN.

Dwg 300-07799-0000 Rev 7




FIGURE 6-15C KY 97A (14V) Main Board Assembly (Sht 2 of 2)
(Dwg No 300-07799-0000, Rev 7)

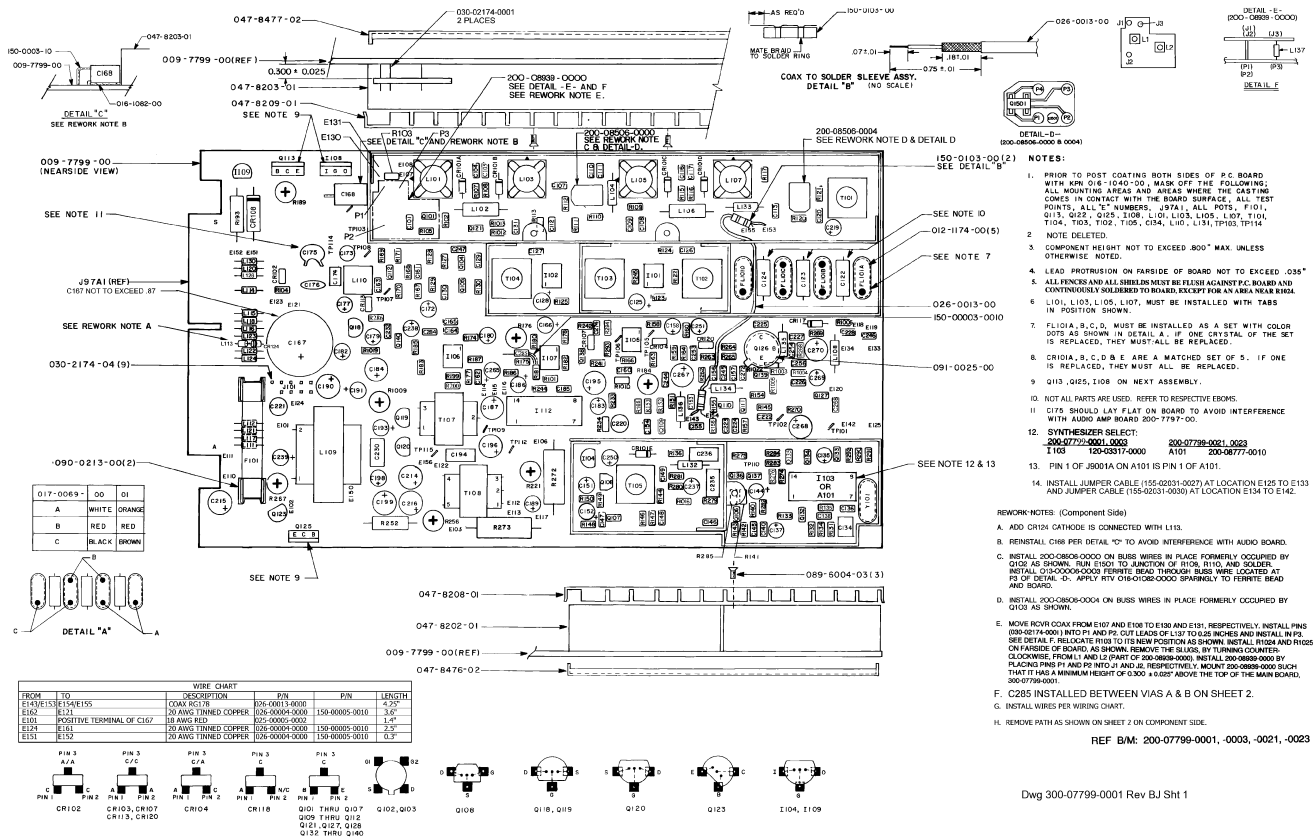


FIGURE 6-16 KY 96A (28V) Main Board Assembly (Sht 1 of 2)
(Dwg No 300-07799-0001, Rev BJ, Sht 1)


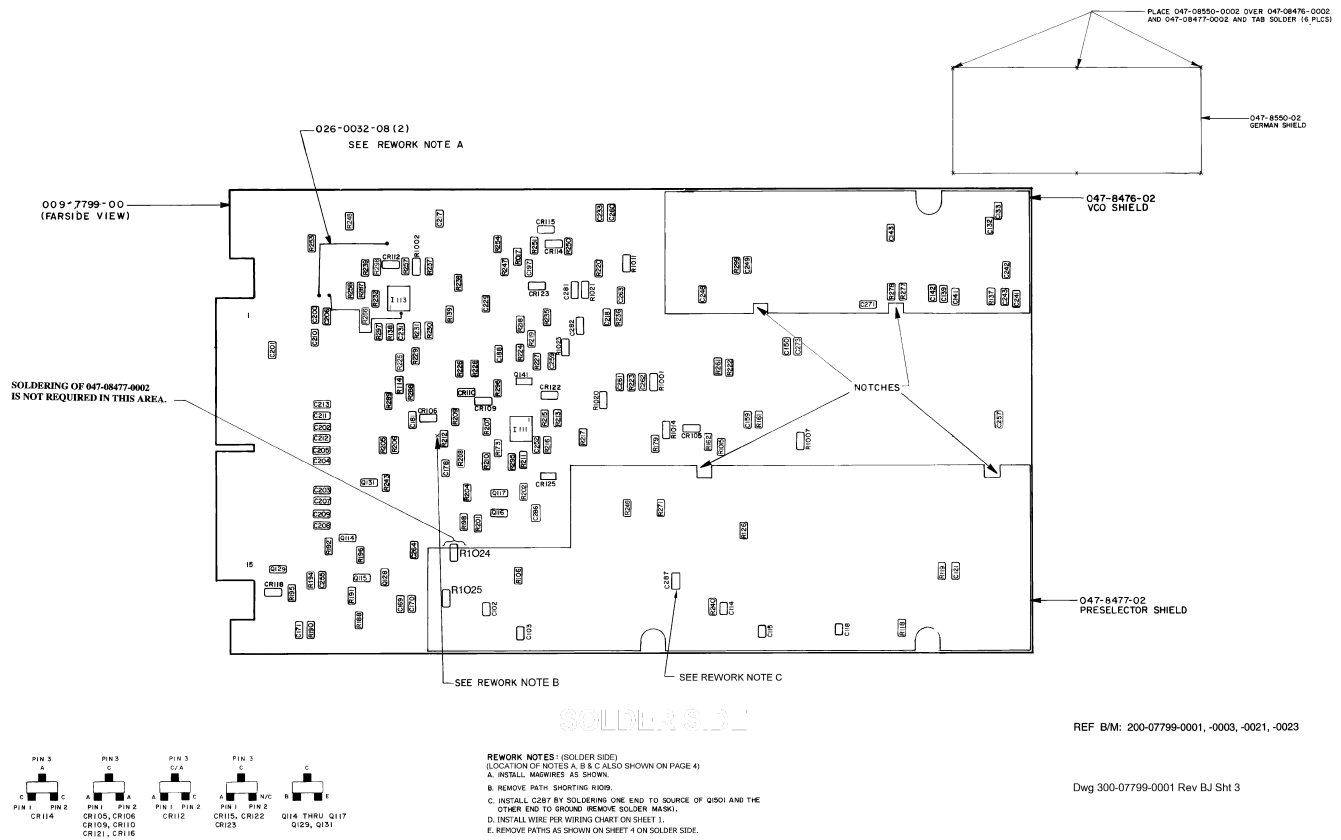


FIGURE 6-16 KY 96A (28V) Main Board Assembly (Sht 2 of 2)
 (Dwg No 300-07799-0001, Rev BJ, Sht 3)

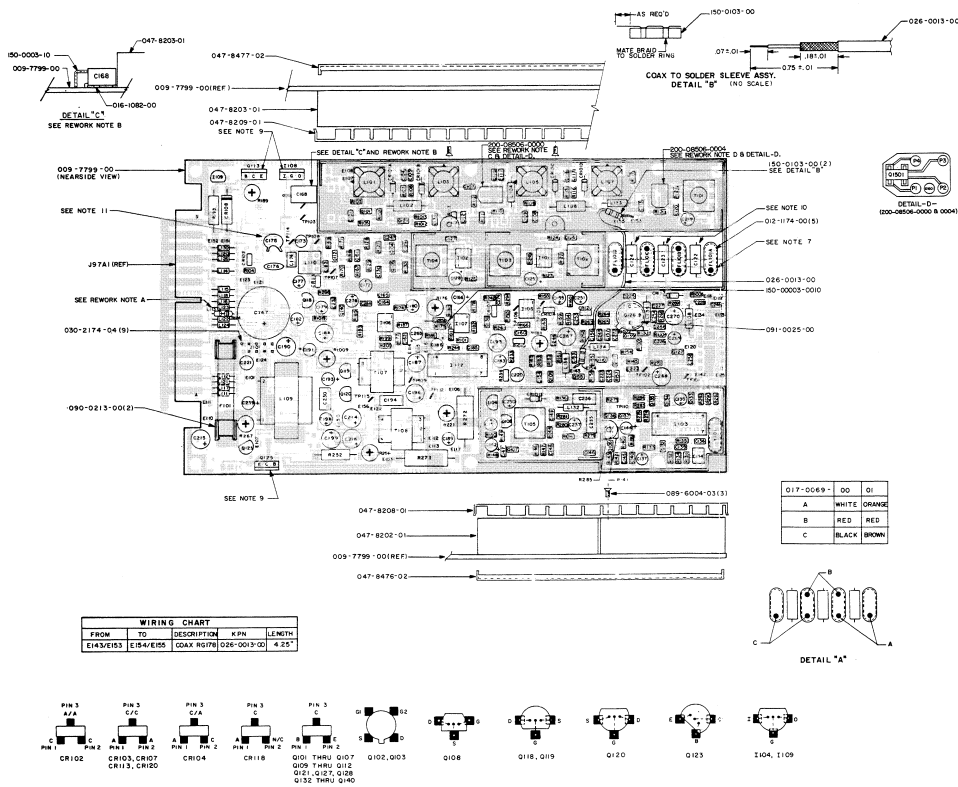

- NOTES:**
1. PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH WAX DIE-1040-00, MARK OFF THE FOLLOWING: ALL MOUNTING AREAS AND AREAS WHERE THE CASTING COMES IN CONTACT WITH THE BOARD SURFACE. ALL TEST POINTS; ALL "X" NUMBERS; J7A1; ALL POTS; F101, Q113, Q22, Q25, I108, L10, L103, L104, L107, T104, T104, T03, T102, T105, Q34, L10, L131.
 - 2.
 3. COMPONENT HEIGHT NOT TO EXCEED .000" MAX. UNLESS OTHERWISE NOTED.
 4. LEAD PROTRUSION ON FAR SIDE OF BOARD NOT TO EXCEED .035".
 5. ALL FENCES AND ALL SHIELDS MUST BE FLUSH AGAINST P.C. BOARD AND CONTINUOUSLY SOLDERED TO BOARD.
 6. L101, L103, L107, MUST BE INSTALLED WITH TABS IN POSITION SHOWN.
 7. FL101A, B, C, D, MUST BE INSTALLED AS A SET WITH COLOR CODE AS SHOWN IN DETAIL A. IF ONE CRYSTAL OF THE SET IS REPLACED, THEY MUST ALL BE REPLACED.
 8. CR101A, B, C, D & E ARE A MATCHED SET OF 5. IF ONE IS REPLACED, THEY MUST ALL BE REPLACED.
 9. Q113, Q125, I108 ON NEXT ASSEMBLY.
 10. Q122, Q124 NOT ON 200-7799-03.
 11. C178 SHOULD LAY FLAT ON BOARD TO AVOID INTERFERENCE WITH AUDIO AMP BOARD 200-7797-00.

- REWORK NOTES:**
- A. ADD CR124 CATHODE IS CONNECTED WITH L113.
 - B. REINSTALL C48 PER DETAIL C TO AVOID INTERFERENCE WITH AUDIO BOARD.
 - C. INSTALL 200-0800-0000 ON BUSS WIRES IN PLACE FORMALLY OCCUPIED BY Q102 AS SHOWN. BUSS SHOULD BE IDENTICAL TO Q102. IF ANY Q102 IS INSTALLED, 200-0800-0000 PARTS. BRUSH THROUGH BUSS WIRE TO DETAIL C. APPLY RTV 06-1000-0000 SPARTRAY TO FORMER HEAD AND HORN.
 - D. INSTALL 200-0800-0000 ON BUSS WIRES IN PLACE FORMALLY OCCUPIED BY Q103 AS SHOWN.

WIRING CHART

| FROM | TO | DESCRIPTION | W.P.N. | LENGTH |
|-----------|-----------|-------------|-------------|--------|
| E143/E153 | E154/E155 | COAX RG178 | D28-0013-00 | 4.25" |

| Q17-Q269 | OO | Q1 |
|----------|-------|--------|
| A | WHITE | ORANGE |
| B | RED | RED |
| C | BLACK | BROWN |






FIGURE 6-16A KY 96A (28V) Main Board Assembly (Sht 1 of 2)
(Dwg No 300-07799-0001, Rev 18)

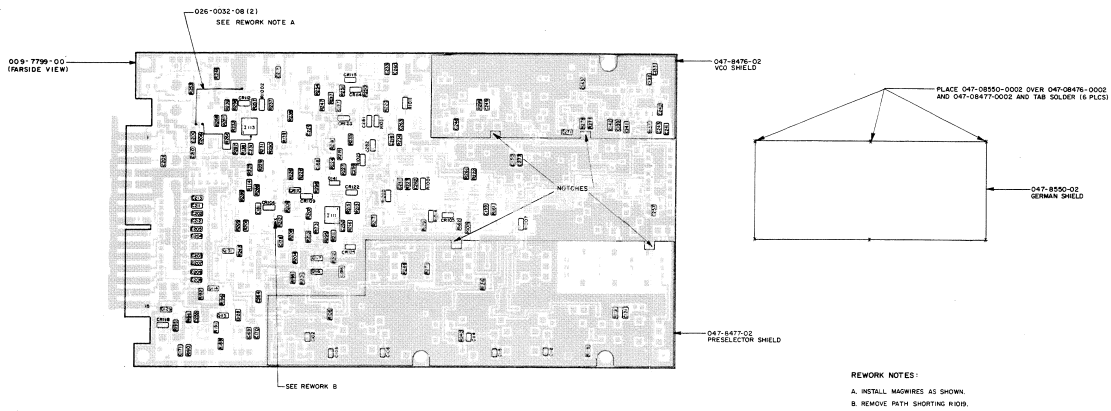


REWORK NOTES:
A. INSTALL MAGWIRE AS SHOWN.
B. REMOVE PATH SHORTING WOOD.



Dwg 300-07799-0001 Rev 18


FIGURE 6-16A KY 96A (28V) Main Board Assembly (Sht 2 of 2)
(Dwg No 300-07799-0001, Rev 18)

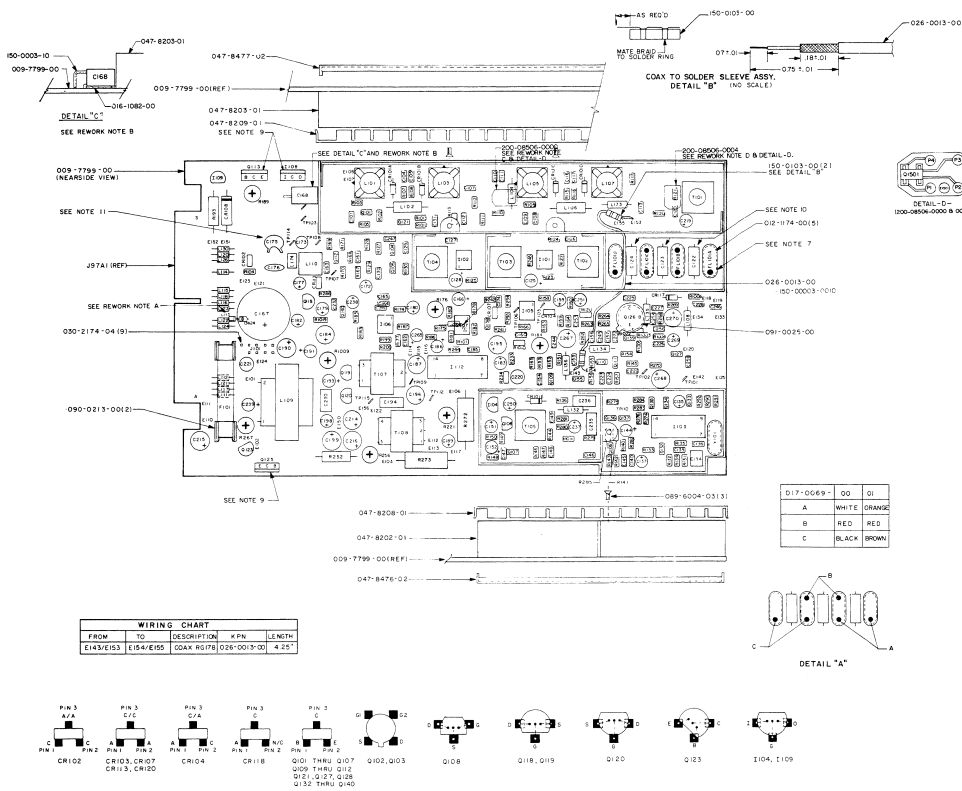


- NOTES:**
- PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH KEN D16-1065-00; MASK OFF THE FOLLOWING: ALL MOUNTING AREAS AND AREAS WHERE THE CASTING COMES IN CONTACT WITH THE BOARD SURFACE. ALL TEST POINTS, ALL "S" NUMBERS, J57A, ALL POTS, P101, Q13, Q22, Q23, L108, L101, L103, L105, L107, T104, T105, T102, T105, D14, L10, L131.
 -
 - COMPONENT HEIGHT NOT TO EXCEED .800" MAX UNLESS OTHERWISE NOTED.
 - LEAD PROTRUSION ON FAR SIDE OF BOARD NOT TO EXCEED .035"
 - ALL FENCES AND ALL SHIELDS MUST BE FLUSH AGAINST P.C. BOARD AND CONTINUOUSLY SOLDERED TO BOARD.
 - L101, L103, L105, L107, MUST BE INSTALLED WITH TABS IN POSITION SHOWN.
 - F101A, B, C, D, MUST BE INSTALLED AS A SET WITH COLOR CODES AS SHOWN IN DETAIL A. IF ONE CRYSTAL OF THE SET IS REPLACED, THEY MUST ALL BE REPLACED.
 - CR101A, B, C, D, E ARE A MATCHED SET OF S. IF ONE IS REPLACED, THEY MUST ALL BE REPLACED.
 - Q13, Q23, L108 ON NEXT ASSEMBLY.
 - Q12, Q23, Q24 NOT ON 200-7799-03.
 - C175 SHOULD LAY FLAT ON BOARD TO AVOID INTERFERENCE WITH AUDIO AMP BOARD 200-7797-00.

- REWORK NOTES**
- ADD CR124 CATHODE IS CONNECTED WITH L113.
 - REINSTALL C168 PER DETAIL C TO AVOID INTERFERENCE WITH AUDIO BOARD.
 - INSTALL 200-0806-0004 ON BUSS WIRES IN PLACE FORMALLY OCCUPIED BY Q123 AS SHOWN. BUSHES TO BE LOCATED TO THE RIGHT OF Q123 AS SHOWN. THROUGH BUSS WIRE LOCATED AT P3 OF DETAIL D.
 - INSTALL 200-0806-0004 ON BUSS WIRES IN PLACE FORMALLY OCCUPIED BY Q123 AS SHOWN.

FIGURE 6-16B KY 96A (28V) Main Board Assembly (Sht 1 of 2)
(Dwg No 300-07799-0001, Rev 17)

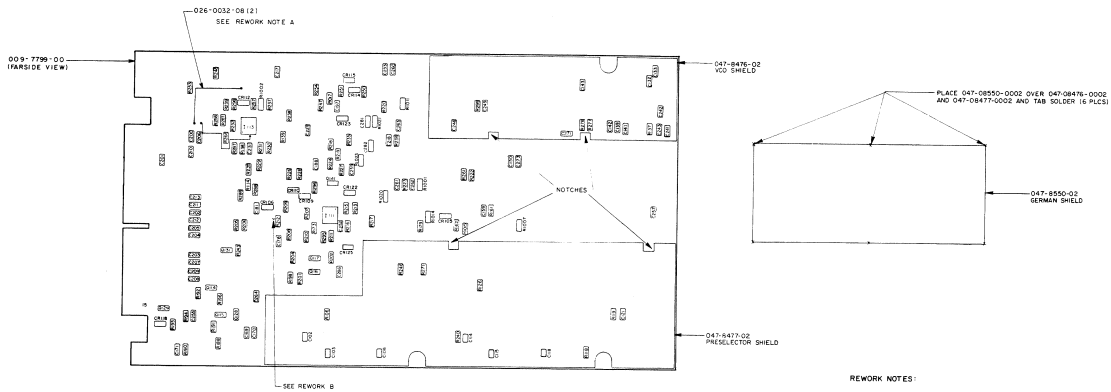


REWORK NOTES:
 A. INSTALL MAGWIRES AS SHOWN.
 B. REMOVE WITH SHORTING RIGS.



Dwg 300-07799-0001 Rev 17

FIGURE 6-16B KY 96A (28V) Main Board Assembly (Sht 2 of 2)
 (Dwg No 300-07799-0001, Rev 17)

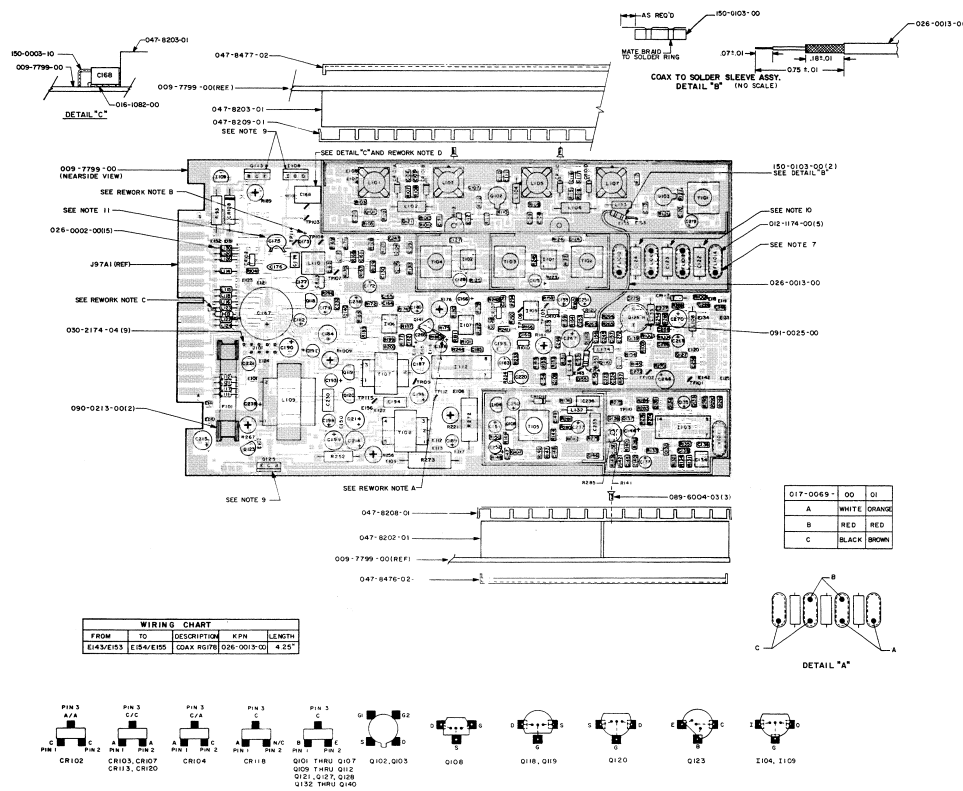


- NOTES:**
1. PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH KRN 016-1040-00, MASK OFF THE FOLLOWING: ALL MOUNTING AREAS AND AREAS WHERE THE CASTING COMES IN CONTACT WITH THE BOARD SURFACE, ALL TEST POINTS, ALL "S" NUMBERS, J37A1, ALL POTS, F101, Q113, Q122, Q125, I108, L101, L102, L105, L107, T101, T104, T103, T102, T105, Q154, L110, L111.
 - 2.
 3. COMPONENT HEIGHT NOT TO EXCEED .800" MAX. UNLESS OTHERWISE NOTED.
 4. LEAD PROTRUSION ON FARSIDE OF BOARD NOT TO EXCEED .035".
 5. ALL FENCES AND ALL SHIELDS MUST BE FLUSH AGAINST P.C. BOARD AND CONTINUOUSLY SOLDERED TO BOARD.
 6. L101, L103, L105, L107, MUST BE INSTALLED WITH TABS IN POSITION SHOWN.
 7. FL10A, B, C, D, MUST BE INSTALLED AS A SET, WITH COLOR CODES AS SHOWN IN DETAIL A. IF ONE CRISTAL OF THE SET IS REPLACED, THEY MUST ALL BE REPLACED.
 8. CR10A, B, C, D & E ARE A MATCHED SET OF 5. IF ONE IS REPLACED, THEY MUST ALL BE REPLACED.
 9. Q113, Q123, I108 ON NEXT ASSEMBLY.
 10. Q122, Q123, Q124 NOT ON 200-7799-03.
 11. C175 SHOULD LAY FLAT ON BOARD TO AVOID INTERFERENCE WITH AUDIO AMP BOARD 200-7797-00.

- REWORK NOTES:**
- A. ADD EYELET 090-5015-06 AT THE + SYMBOL FOR C168. WELD THE BASE LEAD OF Q141 AROUND THE LEAD OF F100 THAT COMES THROUGH BOARD. ENCLOSE THE BASE LEAD OF Q141 WITH ISO-0003-10.
 - B. REMOVE THE + SYMBOL FOR C175 AND REINSTALL C175.
 - C. ADD CR124 CATHODE IS CONNECTED WITH L113.
 - D. REINSTALL C168 PER DETAIL C TO AVOID INTERFERENCE WITH AUDIO BOARD.


| FROM | TO | DESCRIPTION | KPN | LENGTH |
|-----------|-----------|-------------|-------------|--------|
| E143/E153 | E184/E195 | COAX RG178 | Q26-0013-00 | 4.25" |

| Q17-0049-0 | Q0 | Q1 |
|------------|-------|--------|
| A | WHITE | ORANGE |
| B | RED | RED |
| C | BLACK | BROWN |



Dwg 300-07799-0001 Rev 7

FIGURE 6-16C KY 96A (28V) Main Board Assembly (Sht 1 of 2)
(Dwg No 300-07799-0001, Rev 7)

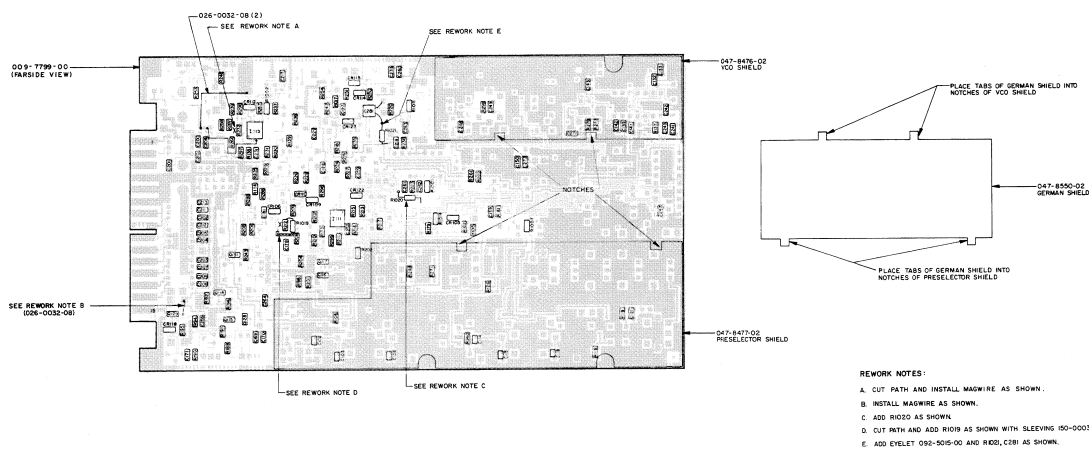

- REWORK NOTES:**
- A. CUT PATH AND INSTALL MAGWIRE AS SHOWN.
 - B. INSTALL MAGWIRE AS SHOWN.
 - C. ADD RI202 AS SHOWN.
 - D. CUT PATH AND ADD RI019 AS SHOWN WITH SLEEVING 150-0003-10.
 - E. ADD EYELET 092-5015-00 AND R020, C181 AS SHOWN.

Dwg 300-07799-0001 Rev 7





FIGURE 6-16C KY 96A (28V) Main Board Assembly (Sht 2 of 2)
 (Dwg No 300-07799-0001, Rev 7)

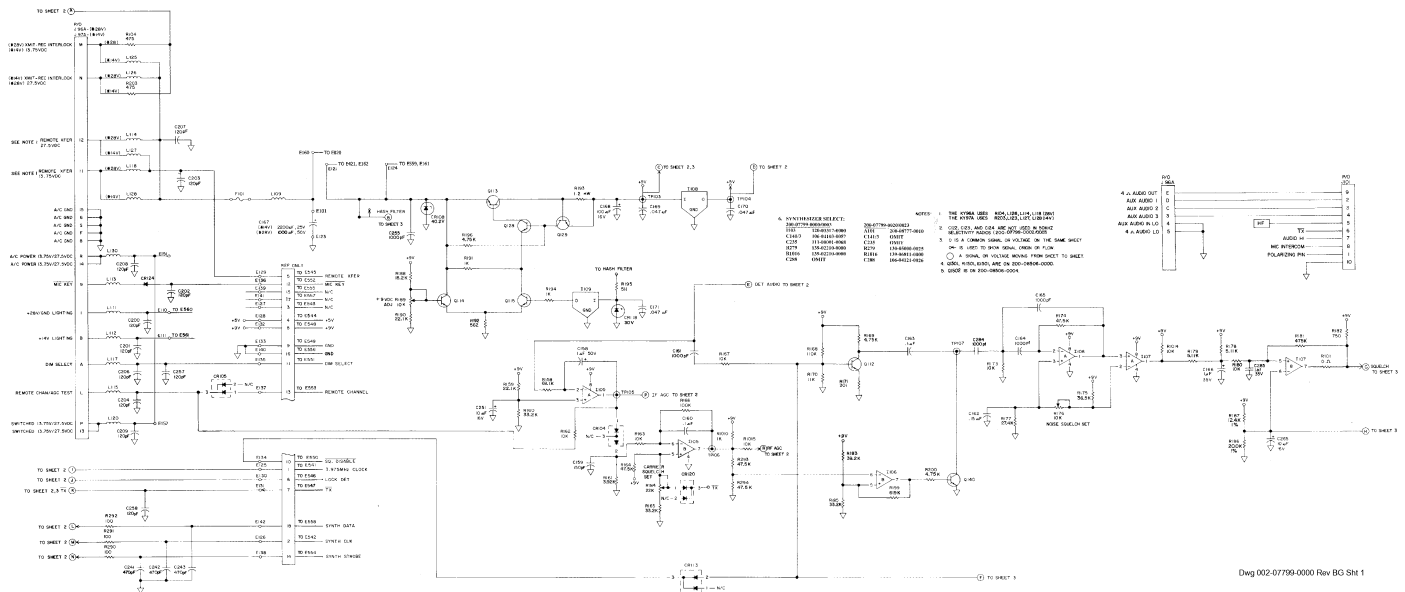

Dwg 002-07799-0000 Rev BG Sht 1

FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 1 of 9)
(Dwg No 002-07799-0000, Rev BG, Sht 1)

Dwg 002-07799-0000 Rev BG Sht 1 Sect A

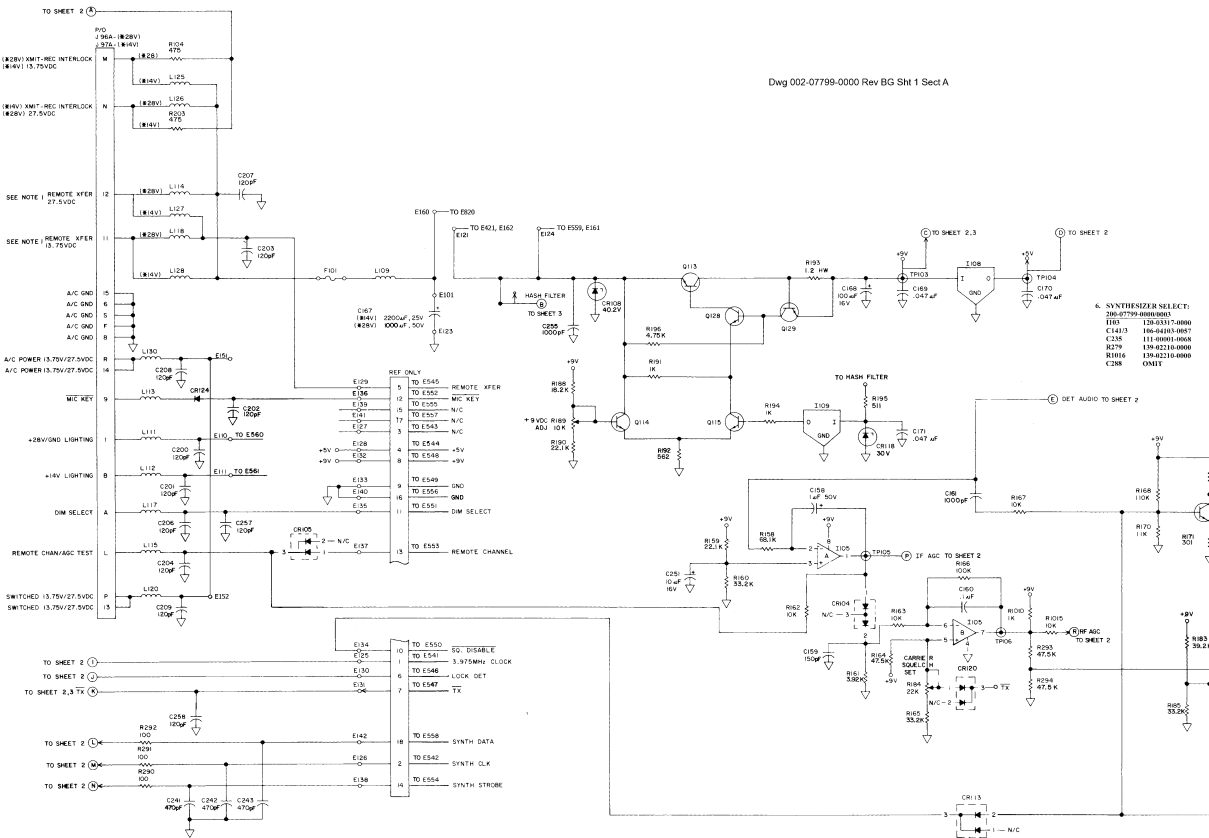


FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 2 of 9)
(Dwg No 002-07799-0000, Rev BG, Sht 1, Sect A)


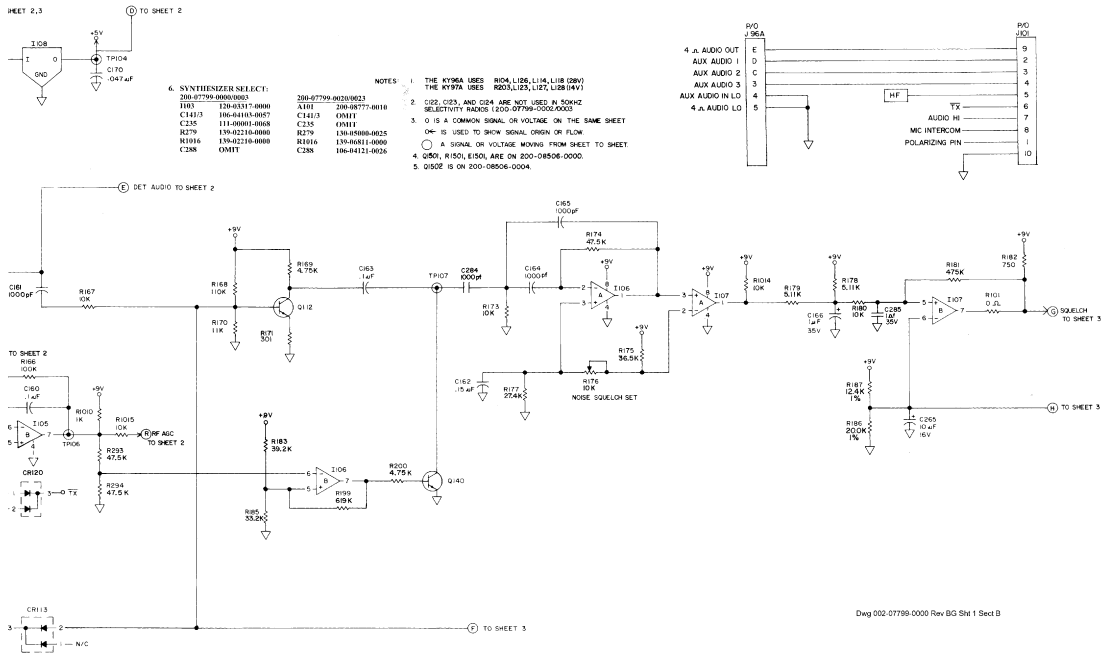



FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 3 of 9) (Dwg No 002-07799-0000, Rev BG, Sht 1, Sect B)

Dwg 002-07799-0000 Rev BG Sht 1 Sect B

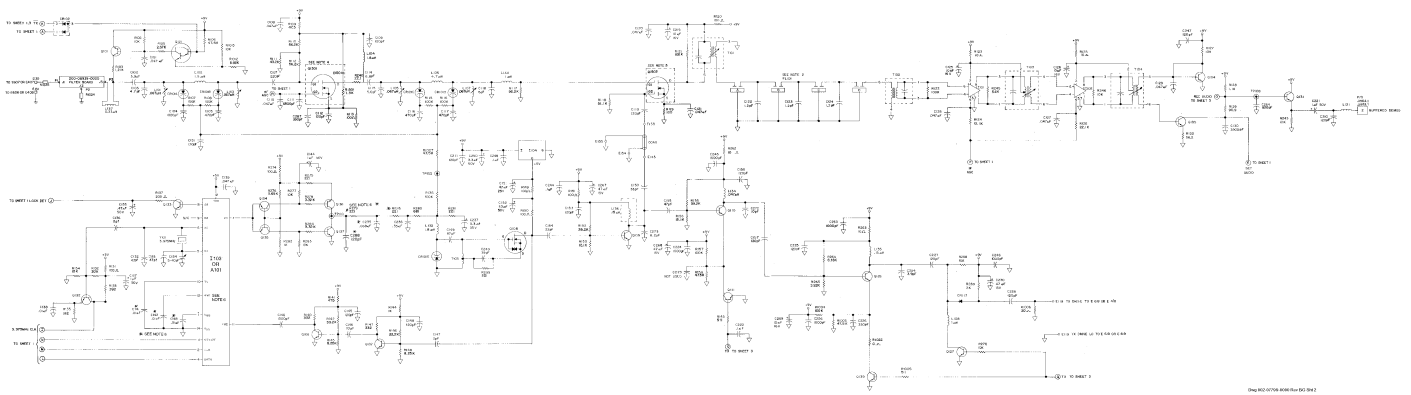

Dwg No 002-07799-0000

FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 4 of 9)
(Dwg No 002-07799-0000, Rev BG, Sht 2)

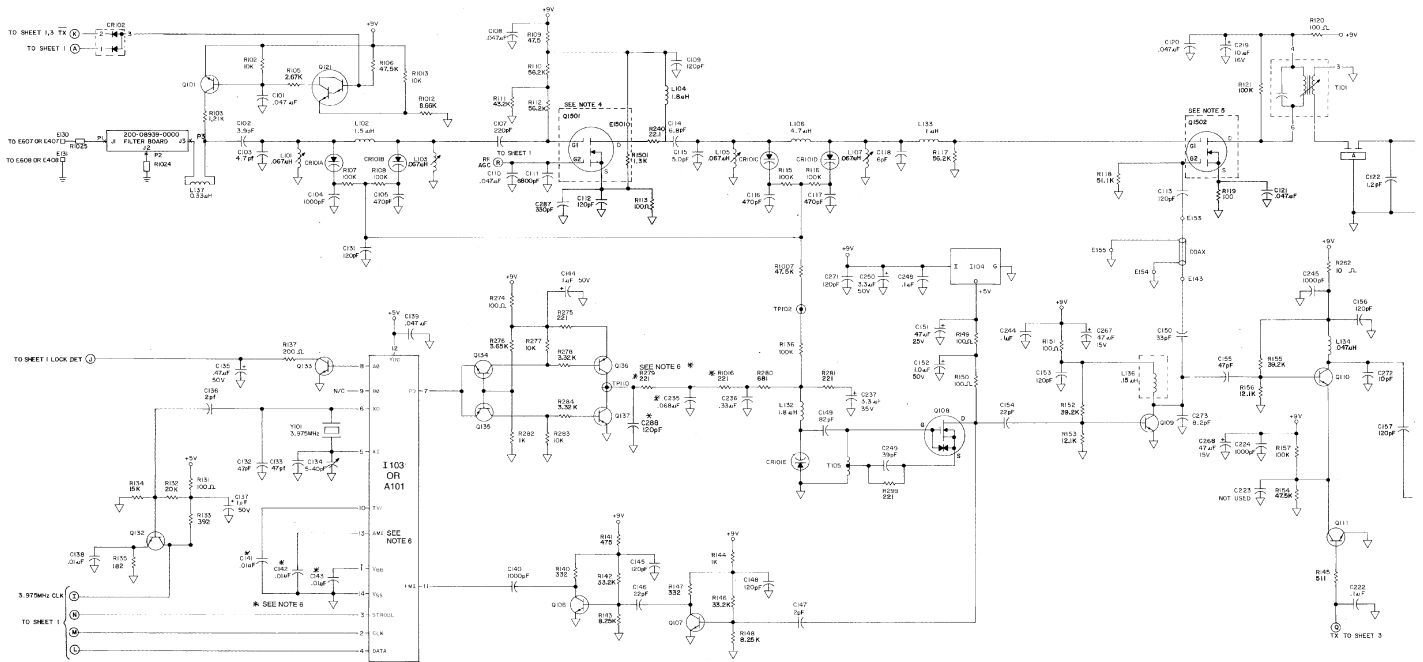

Dwg 002-07799-0000 Rev BG Sht 2 Sect A

FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 5 of 9)
(Dwg No 002-07799-0000, Rev BG, Sht 2, Sect A)

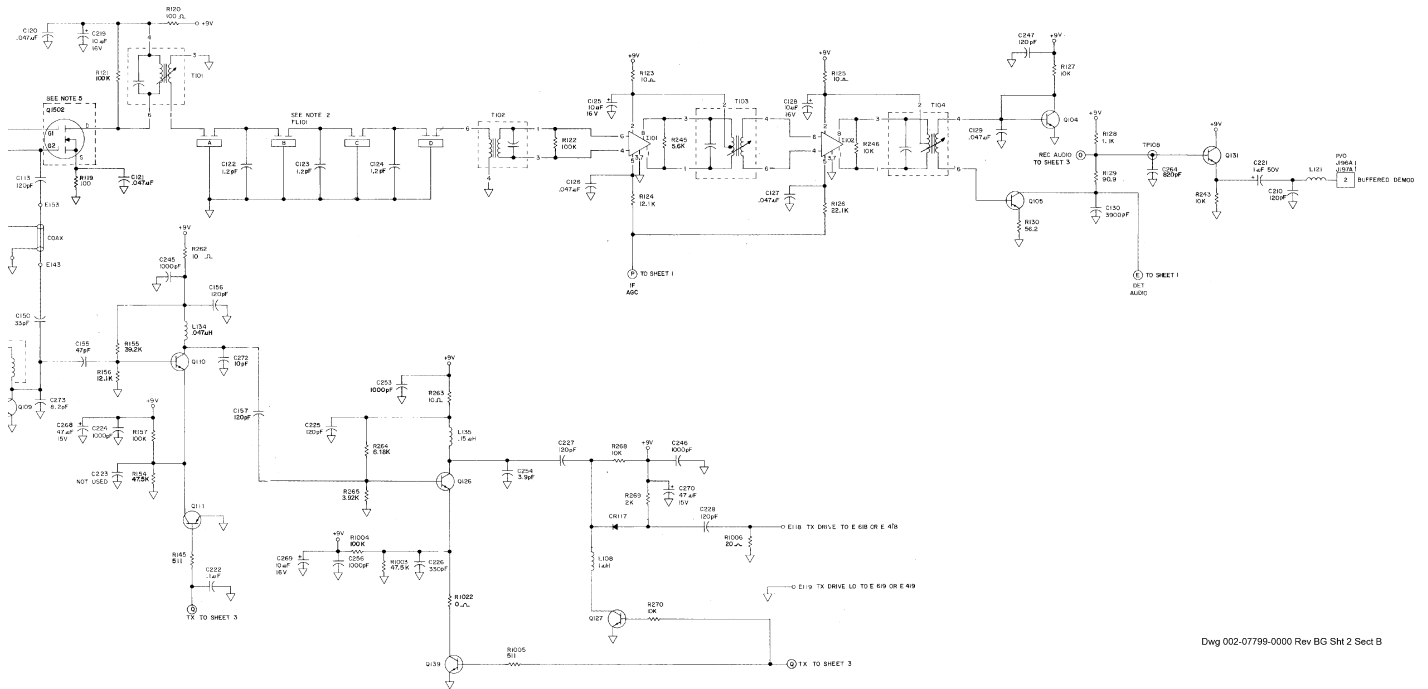


FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 6 of 9)
(Dwg No 002-07799-0000, Rev BG, Sht 2, Sect B)



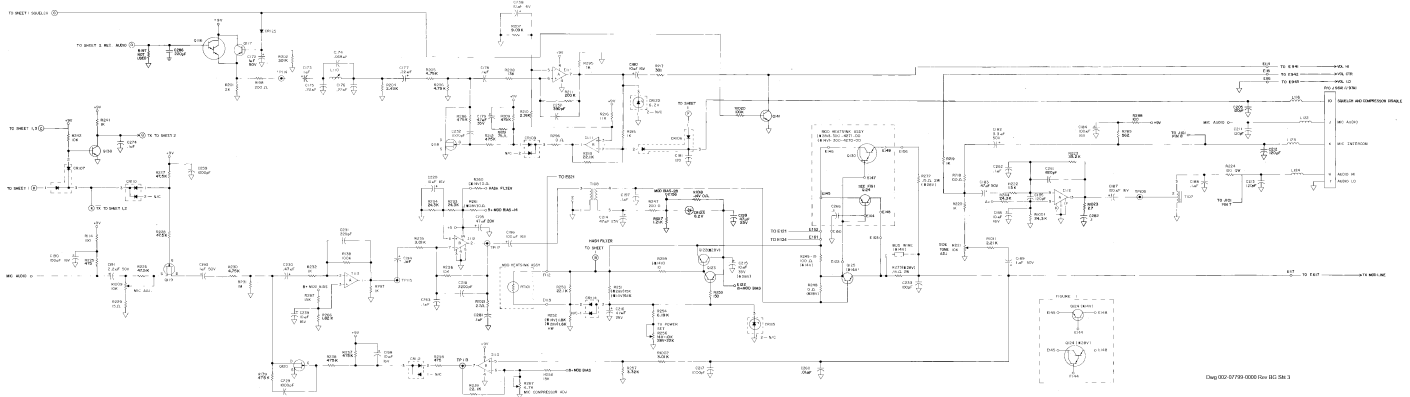


FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 7 of 9)
(Dwg No 002-07799-0000, Rev BG, Sht 3)

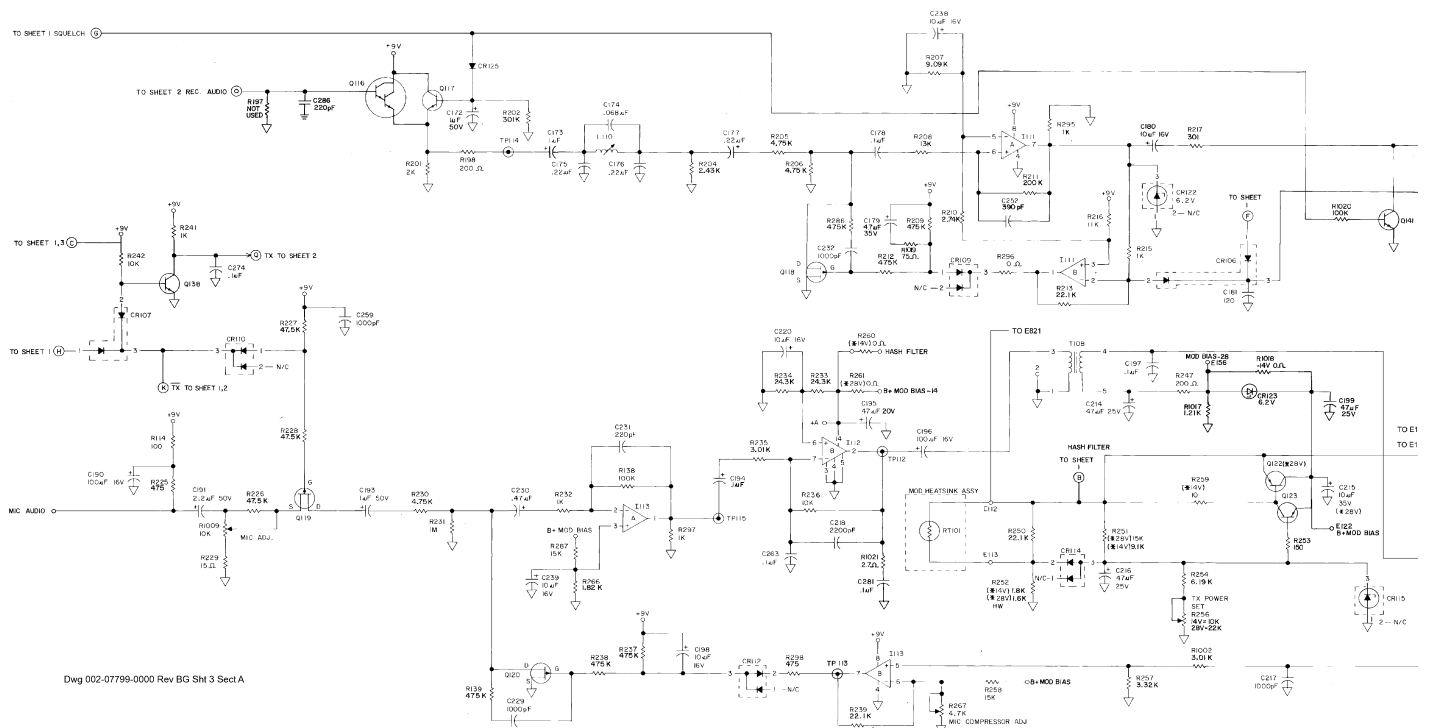

Dwg 002-07799-0000 Rev BG Sht 3 Sect A

FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 8 of 9) (Dwg No 002-07799-0000, Rev BG, Sht 3, Sect A)

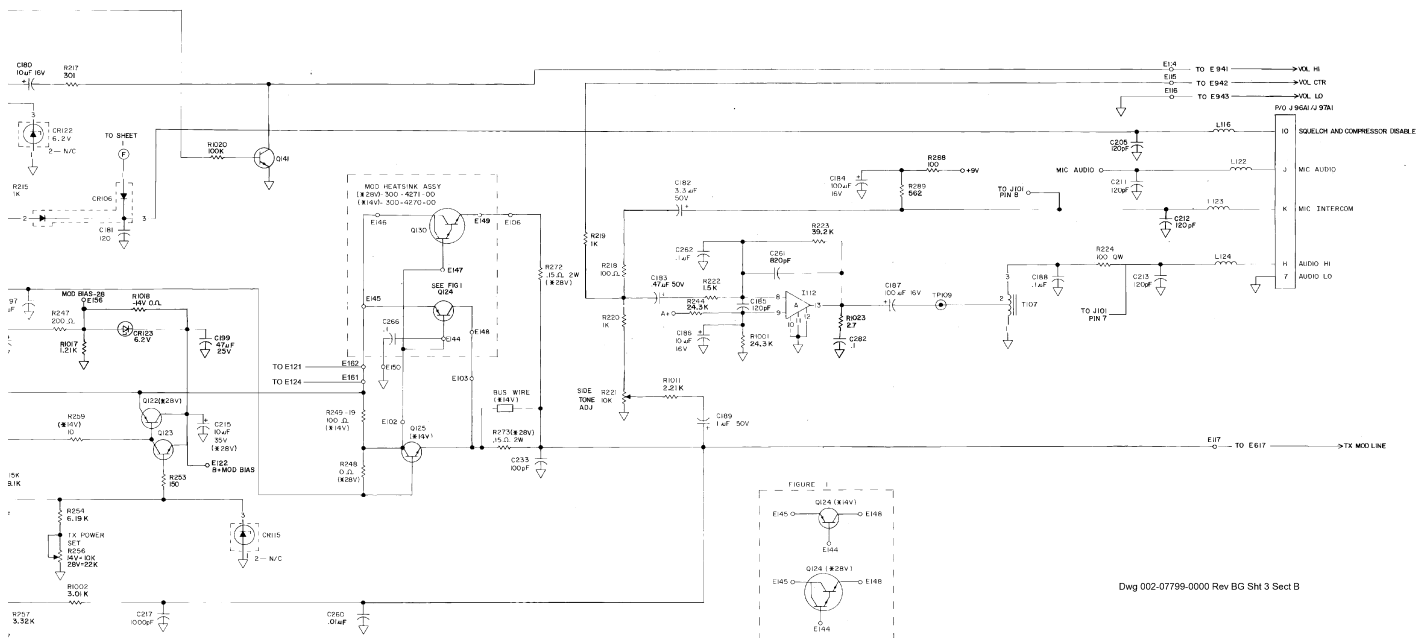

Dwg 002-07799-0000 Rev BG Sht 3 Sect B

FIGURE 6-17 KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 9 of 9)
(Dwg No 002-07799-0000, Rev BG, Sht 3, Sect B)

Dwg 002-07799-0000 Rev 22 Sht 1 Sect A

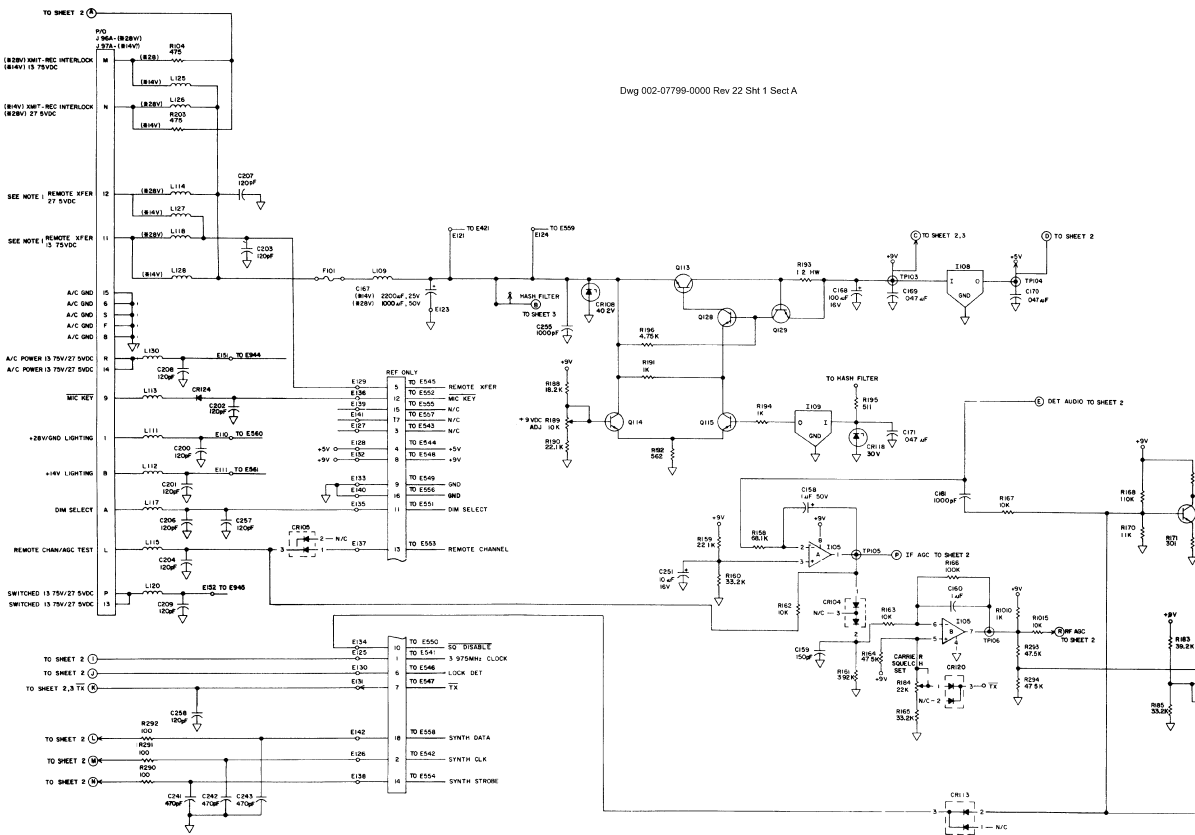


FIGURE 6-17A KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 1 of 6)
(Dwg No 002-07799-0000, Rev 22, Sht 1, Sect A)

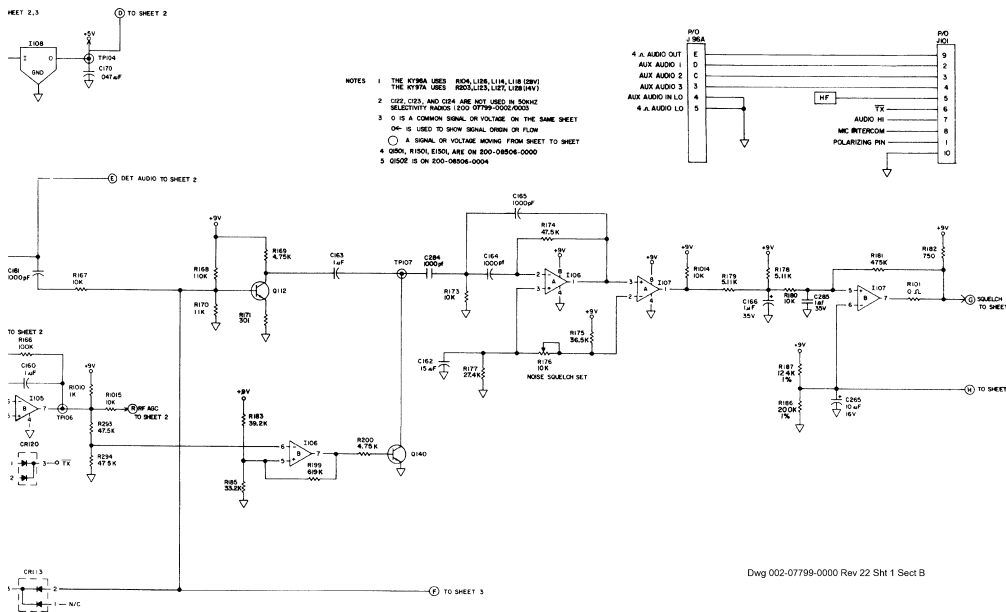


FIGURE 6-17A KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 2 of 6)
(Dwg No 002-07799-0000, Rev 22, Sht 1, Sect B)

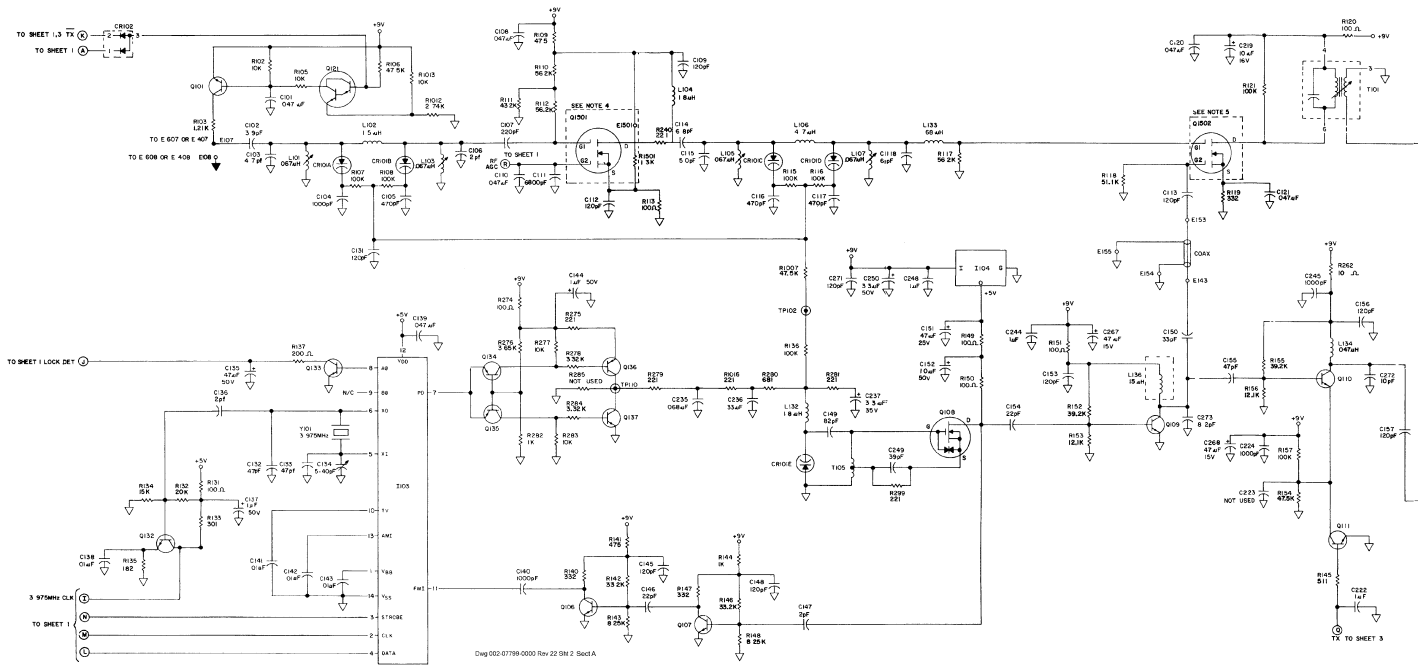


FIGURE 6-17A KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 3 of 6)
(Dwg No 002-07799-0000, Rev 22, Sht 2, Sect A)


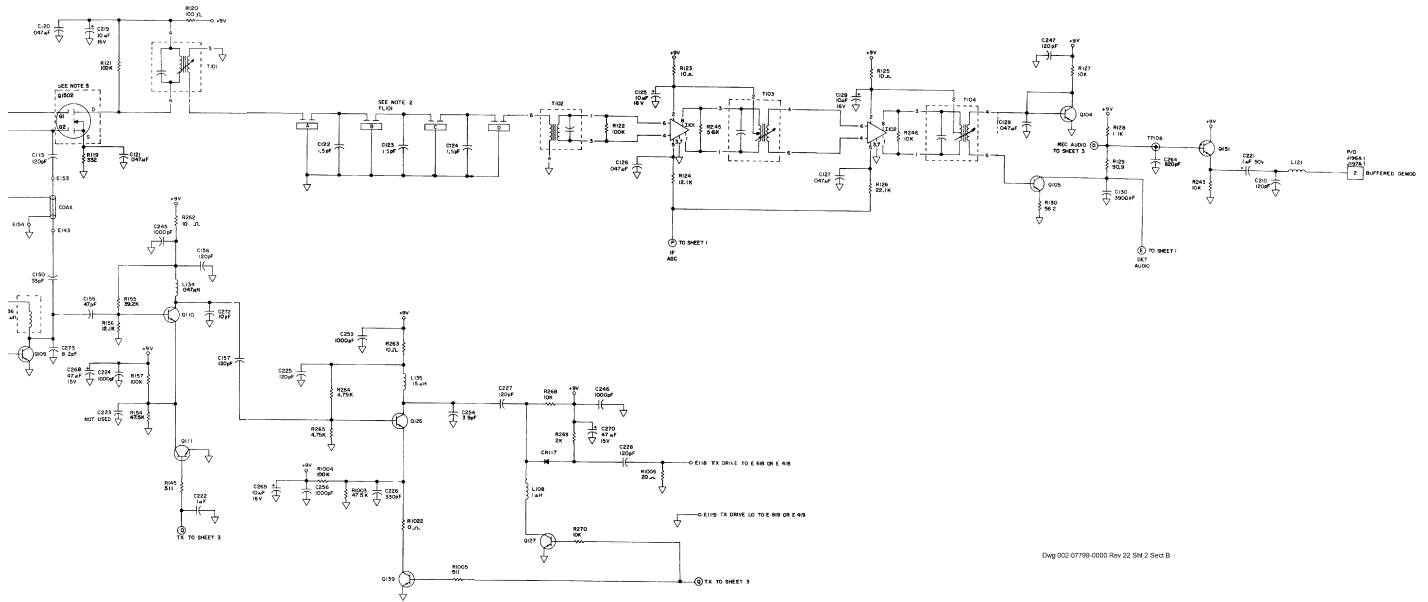


FIGURE 6-17A KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 4 of 6)
(Dwg No 002-07799-0000, Rev 22, Sht 2, Sect B)

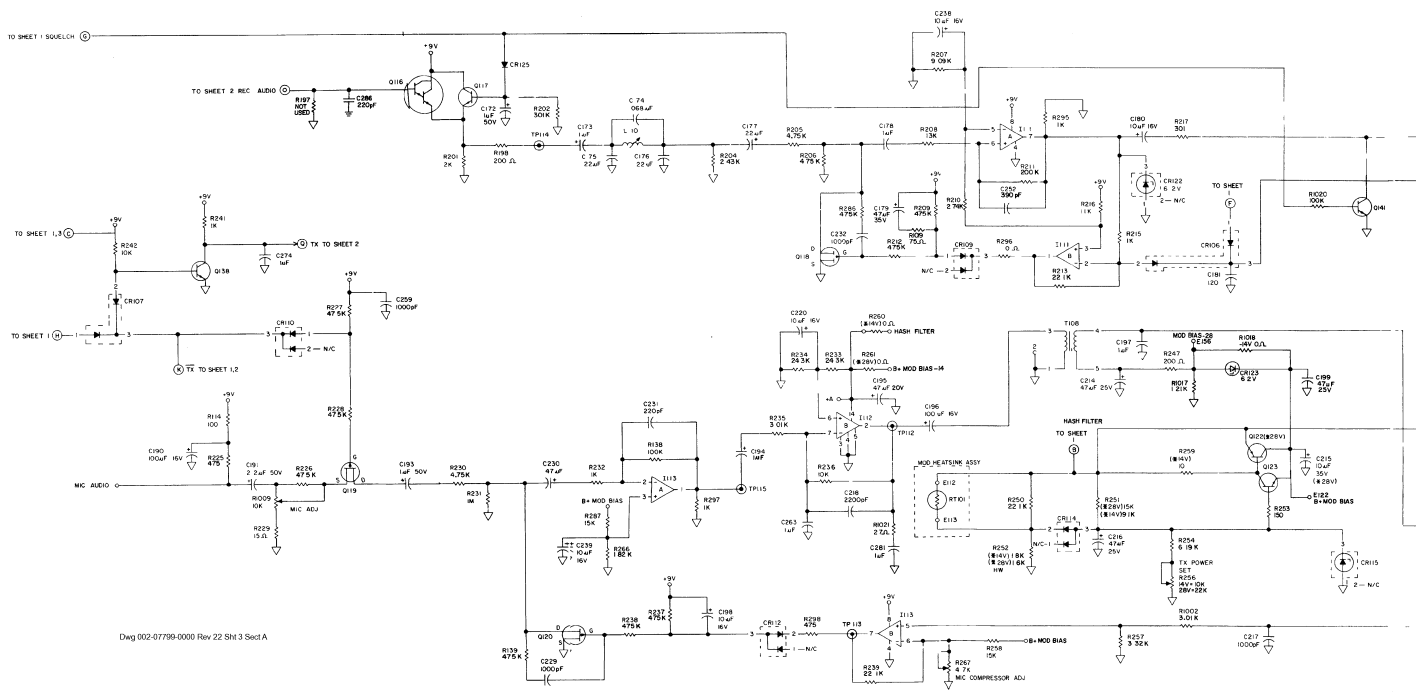

Dwg 002-07799-0000 Rev 22 Sht 3 Sect A

FIGURE 6-17A KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 5 of 6)
(Dwg No 002-07799-0000, Rev 22, Sht 3, Sect A)

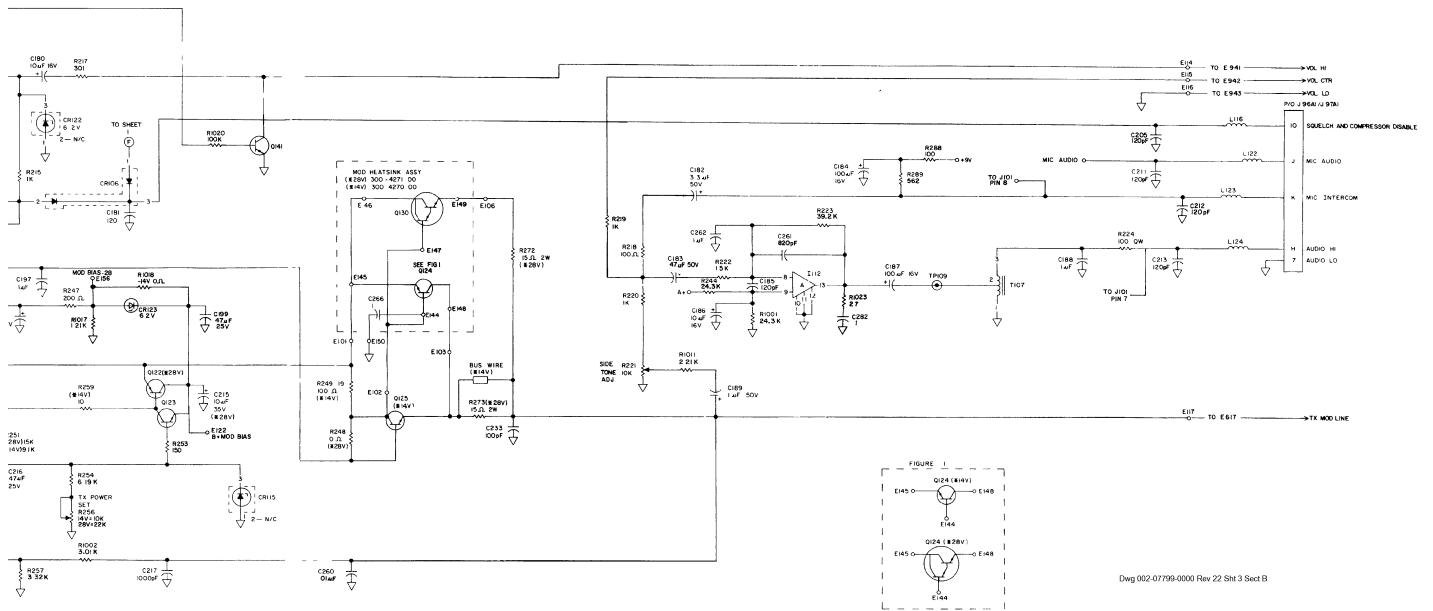


FIGURE 6-17A KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 6 of 6)
(Dwg No 002-07799-0000, Rev 22, Sht 3, Sect B)

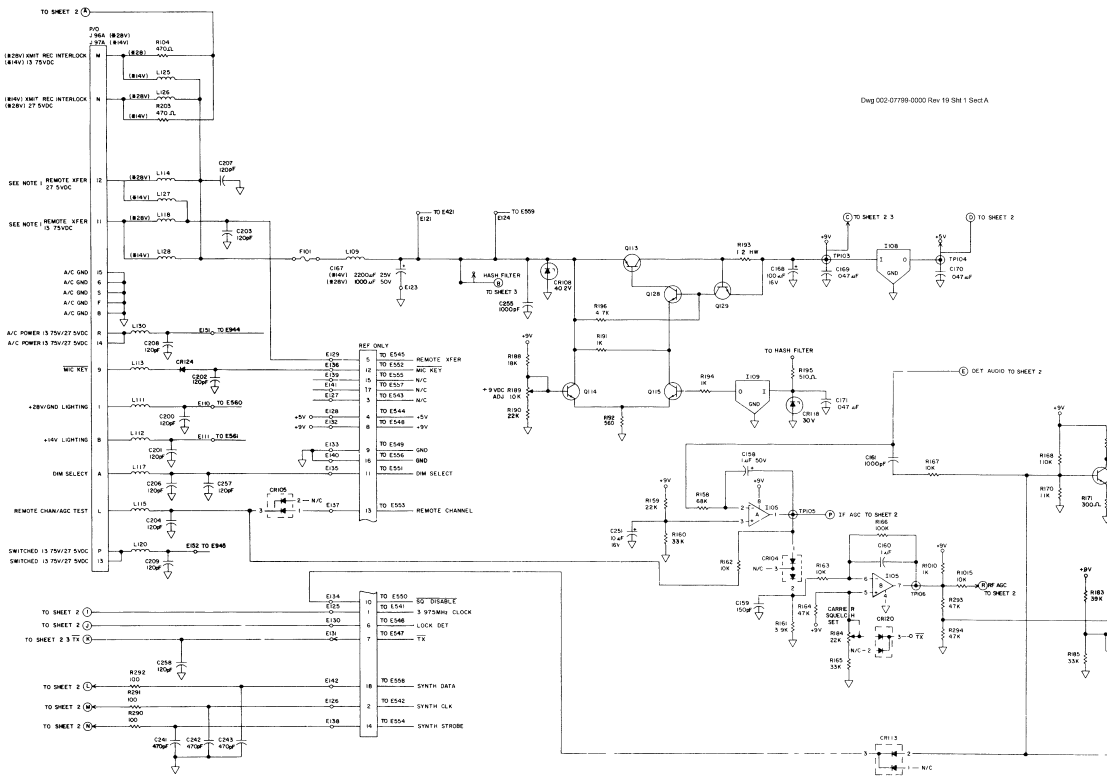


FIGURE 6-17B KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 1 of 6)
(Dwg No 002-07799-0000, Rev 19, Sht 1, Sect A)


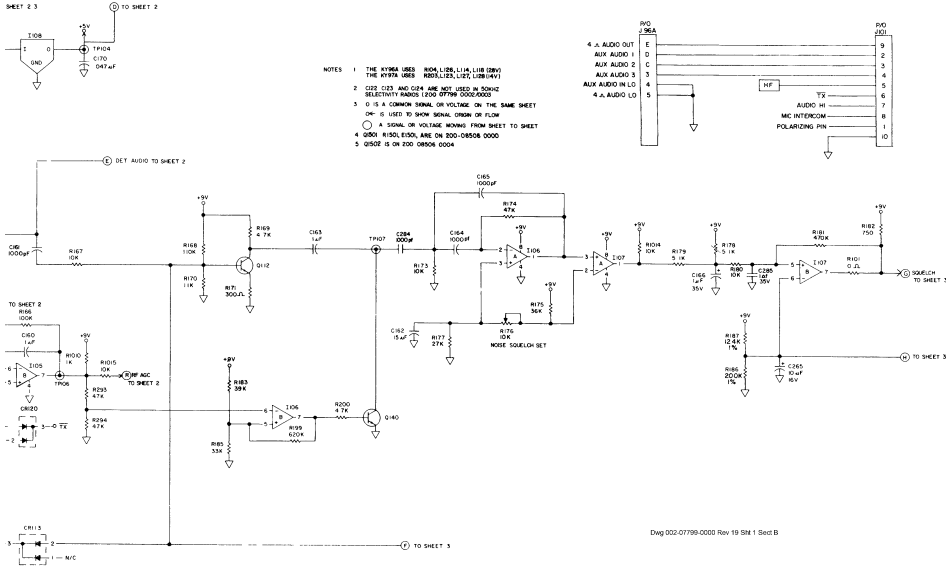


FIGURE 6-17B KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 2 of 6)
(Dwg No 002-07799-0000, Rev 19, Sht 1, Sect B)

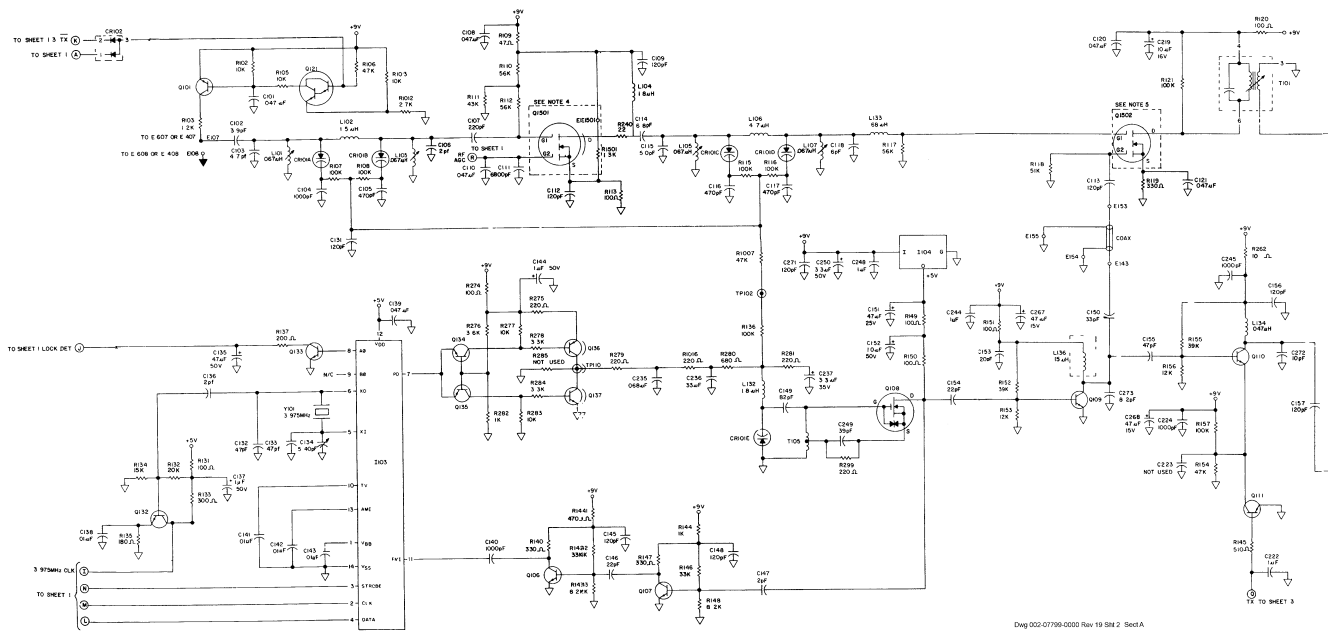

Dwg 002-07799-0005 Rev 19 Sht 2 Sect A

FIGURE 6-17B KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 3 of 6)
(Dwg No 002-07799-0000, Rev 19, Sht 2, Sect A)

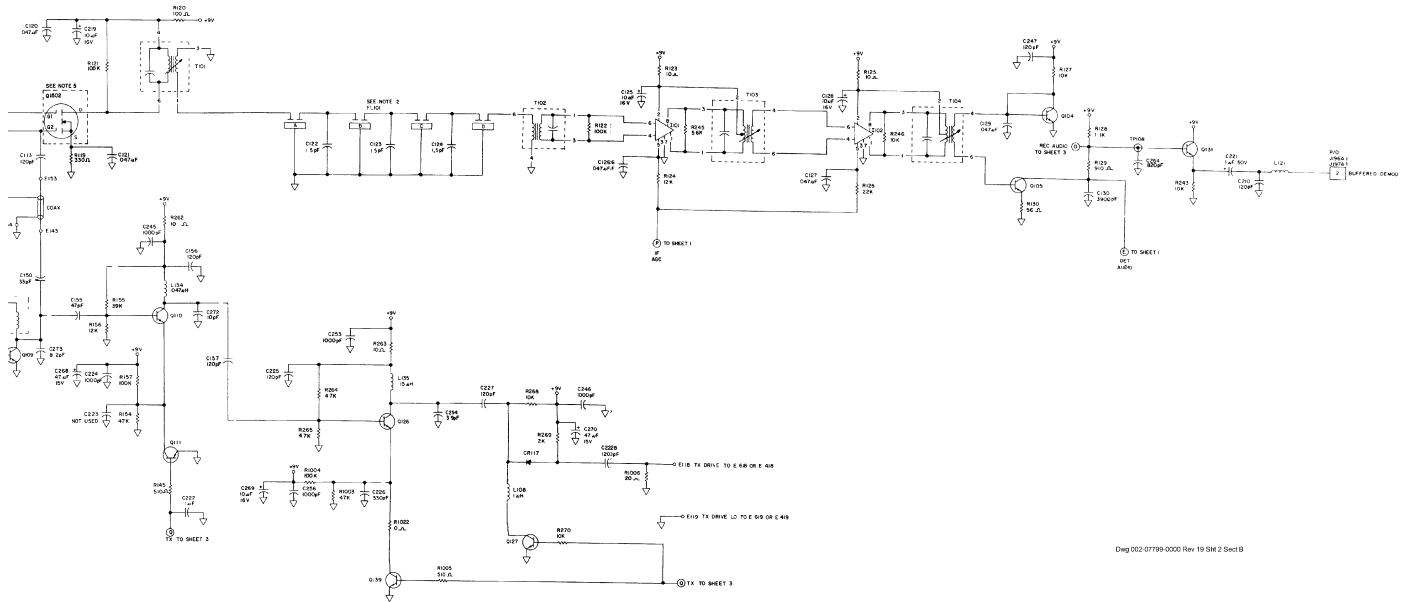


FIGURE 6-17B KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 4 of 6)
(Dwg No 002-07799-0000, Rev 19, Sht 2, Sect B)

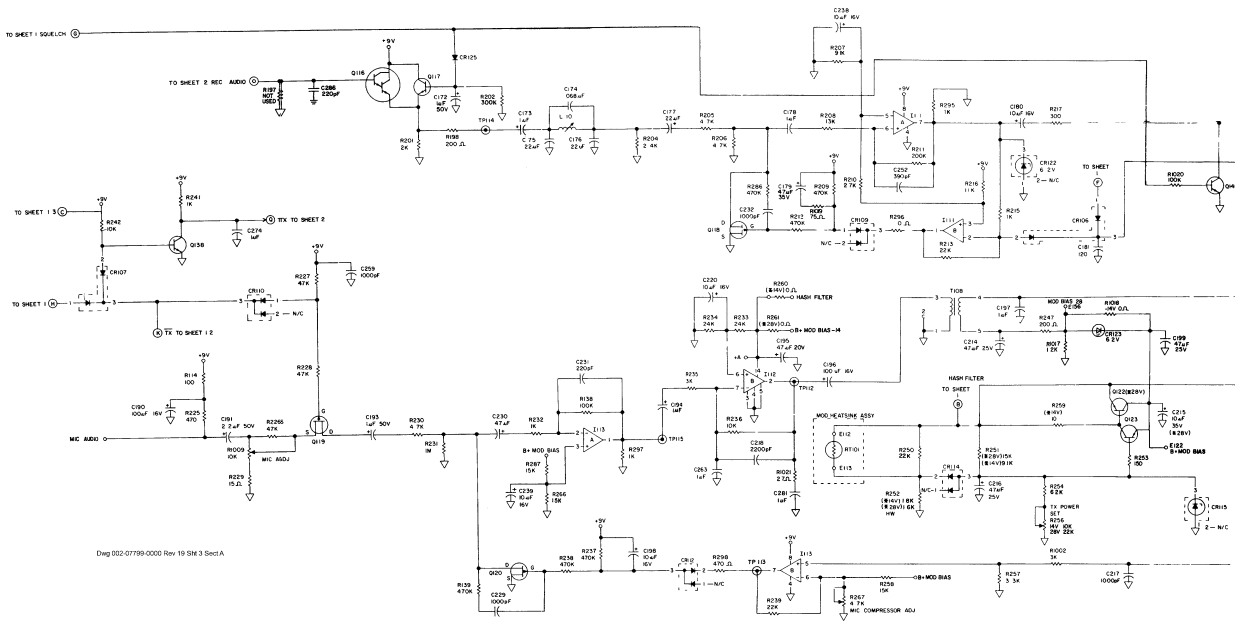


FIGURE 6-17B KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 5 of 6)
(Dwg No 002-07799-0000, Rev 19, Sht 3, Sect A)

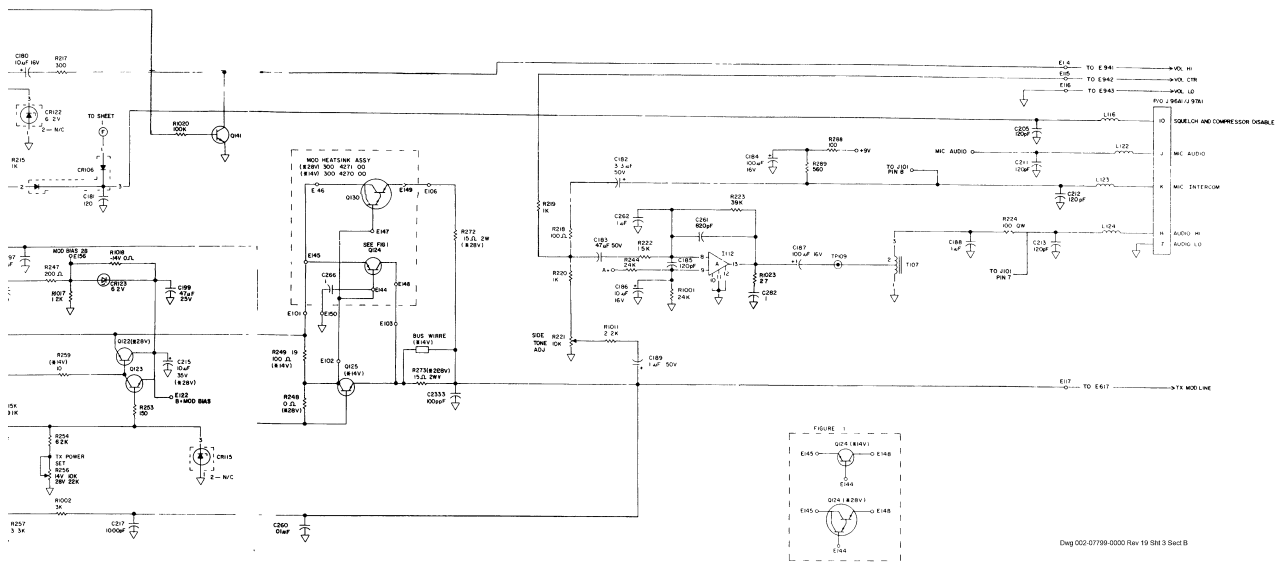


FIGURE 6-17B KY 96A, KY 97A (28V_14V) Main Board Schematic (Sht 6 of 6)
(Dwg No 002-07799-0000, Rev 19, Sht 3, Sect B)

Dwg 002-07799-0000 Rev 19 Sht 3 Sect B

APPENDIX S
SOFTWARE/ HARDWARE CONFIGURATION

THIS PAGE RESERVED

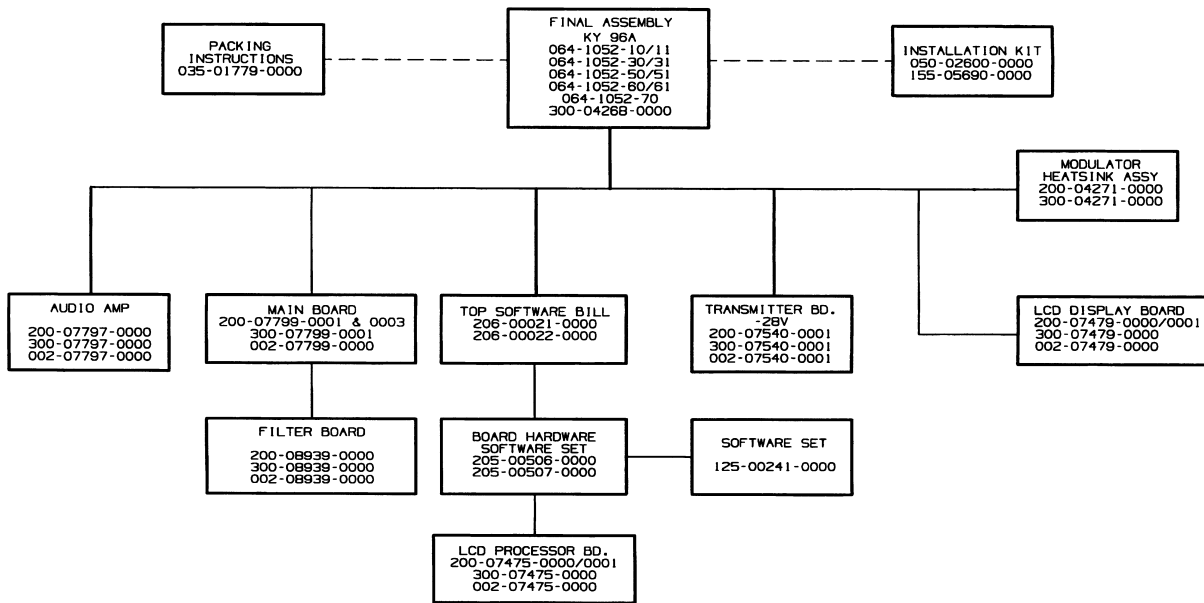


FIGURE S-1 KY 96A Software/ Hardware Configuration (Sht 1 of 3)

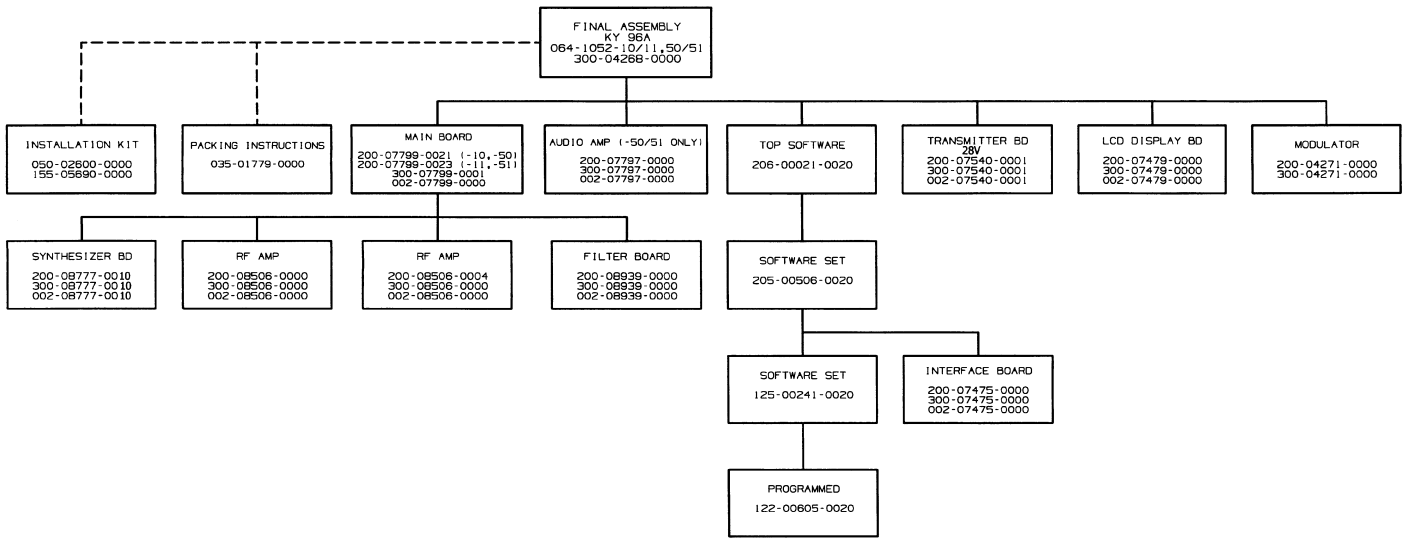


FIGURE S-1 KY 96A Software/ Hardware Configuration (Sht 2 of 3)

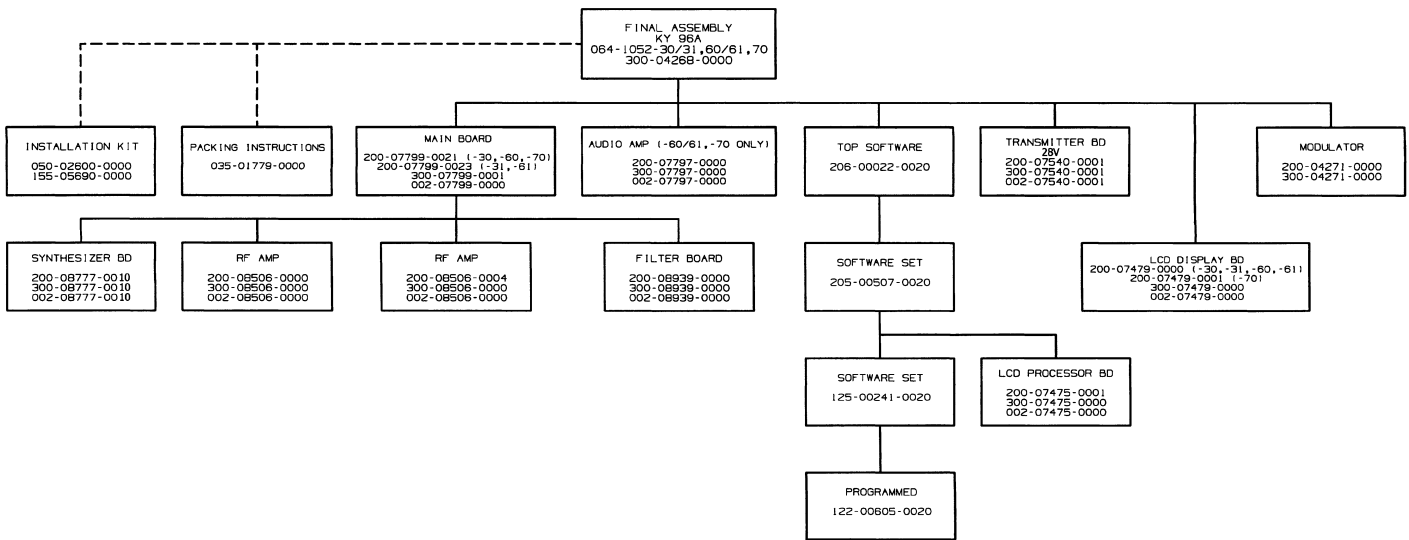


FIGURE S-1 KY 96A Software/ Hardware Configuration (Sht 3 of 3)

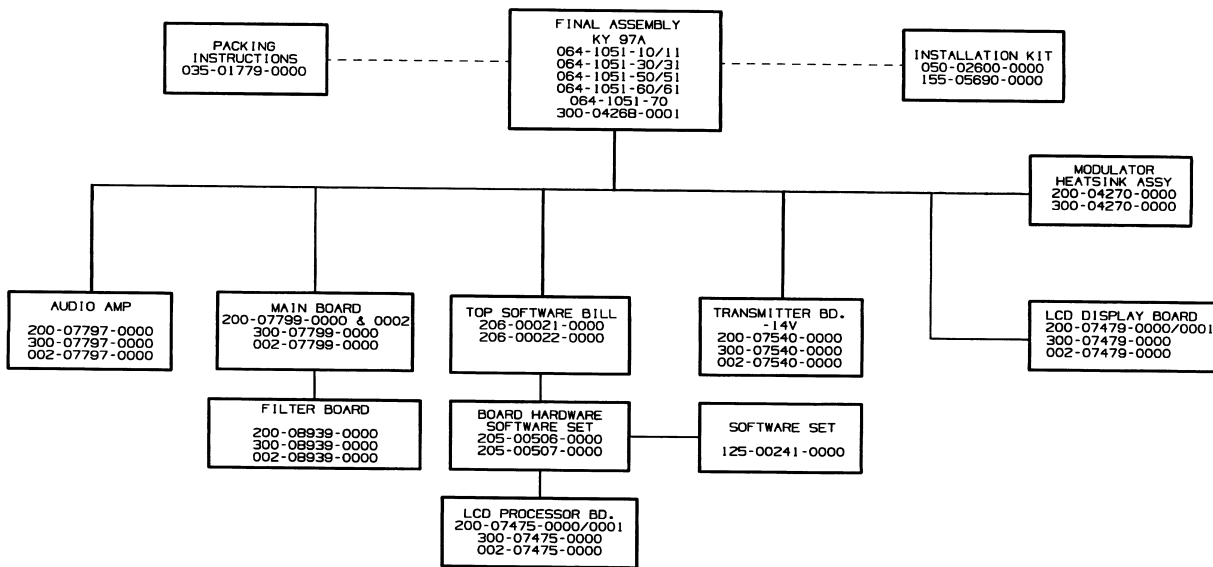


FIGURE S-2 KY 97A Software/ Hardware Configuration (Sht 1 of 3)

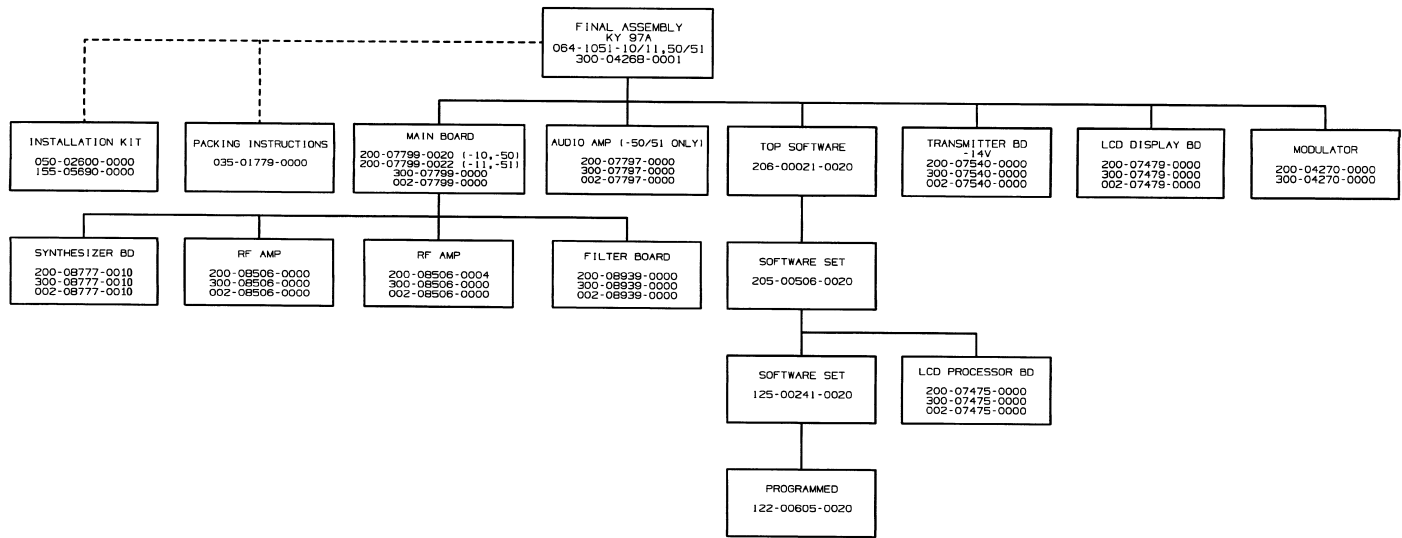


FIGURE S-2 KY 97A Software/ Hardware Configuration (Sht 2 of 3)

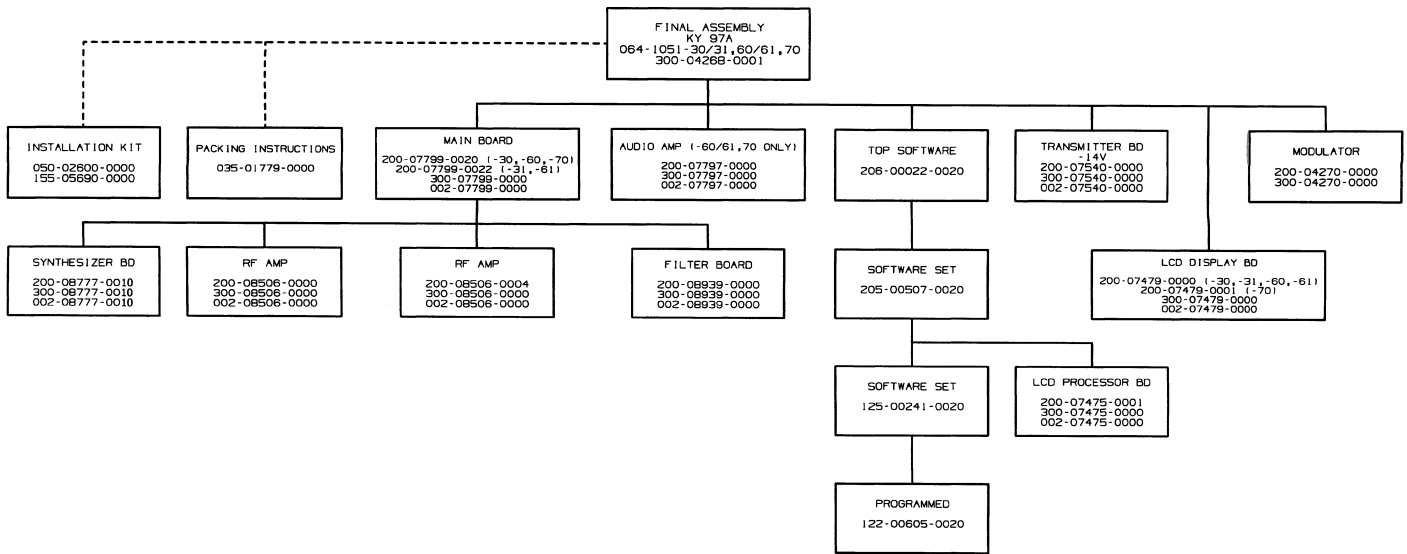


FIGURE S-2 KY 97A Software/ Hardware Configuration (Sht 3 of 3)